



Tenable Identity Exposure On-Premise Installation Guide

Last Revised: December 11, 2023



Table of Contents

Tenable Identity Exposure On-Premise Installation Guide	1
Welcome to Tenable Identity Exposure	4
Work with Tenable Identity Exposure	5
Technical Prerequisites	7
On-premises Architectures	7
Tenable Identity Exposure Deployment	11
Resource Sizing	14
Storage Manager Disk Requirements	19
Hardware Requirements	21
Network Requirements	22
Network Flow Matrix	23
Network Matrix for Transport Layer Security (TLS) Mode	30
Web Portal Requirements	34
Integration with an Active Directory Domain	35
Prerequisites Checklist	36
Install Tenable Identity Exposure	39
Installation Options	40
Installation with Default TLS	43
Installation with Default TLS in "Expert Mode"	52
Installation with Custom TLS and without Peer Verification	66
Installation with Custom TLS and with Peer Verification	82
Installation with No TLS	98
Security Probe	111



Split Security Engine Node (SEN) Services	117
Upgrade Tenable Identity Exposure	126
Upgrade with Default TLS	127
Upgrade with Default TLS using "Expert Mode"	140
Upgrade with TLS without Peer Verification	156
Upgrade with TLS and with Peer Verification	173
Upgrade with No TLS	191
Restart Services	207
Manage Tenable Identity Exposure	209
Connect to an Event Log Collector	210
Scale Tenable Identity Exposure Services	211
Change IP Addresses or FQDNs for Tenable Identity Exposure Nodes	213
HTTPS for Tenable Identity Exposure Web Application	215
View the IIS Certificate	216
Change the IIS Certificate	217
Upgrade and Maintenance	220
Uninstall Tenable Identity Exposure	221



Welcome to Tenable Identity Exposure

Last updated: December 11, 2023

Tenable Identity Exposure (formerly Tenable.ad) provides real-time security monitoring for Microsoft Active Directory (AD) infrastructures. By leveraging a non-intrusive approach based on the AD replication process, Tenable empowers security teams in their audit, threat hunting, detection, and incident response tasks.

This On-Premise Installation Guide gives the following information:

- The technical requirements to deploy and operate Tenable Identity Exposure as an on-premises platform that is disconnected from the Internet.
- The environment specifications from a network and application perspective.
- The tasks to perform before enabling security monitoring.

To get started, see [Work with Tenable Identity Exposure](#).



Work with Tenable Identity Exposure

Use the following getting started sequence to prepare, install, configure, and manage your Tenable Identity Exposure deployment.

1. [Prepare](#)
2. [Install or Upgrade](#)
3. [Configure](#)
4. [Manage](#)

Prepare

Before you install Tenable Identity Exposure , review the architectures and the following technical prerequisites to ensure that your platform runs optimally:

- [On-premises Architectures](#)
- [Resource Sizing](#)
- [Network Requirements](#)
- [Integration with an Active Directory Domain](#)

Install or Upgrade

You download the installation programs from the Tenable Identity Exposure portal. Tenable Identity Exposure offers several types of TLS installations depending on your infrastructure.

- [Install Tenable Identity Exposure](#)
- [Installation Options](#)
- [Upgrade Tenable Identity Exposure](#)

Configure

For all configuration tasks including the [deployment of Indicators of Attack](#), see the [Tenable Identity Exposure Administrator Guide](#).

Manage



You use the Tenable Identity Exposure portal to review, manage, and receive relevant information about the security state of the monitored infrastructure.

- [Connect to an Event Log Collector](#)
- [Change the IIS Certificate](#)
- [Scale Tenable Identity Exposure Services](#)
- [Upgrade and Maintenance](#)



Technical Prerequisites

See the following sections for the technical prerequisites for an on-premises installation of Tenable Identity Exposure.


- [On-premises Architectures](#)
- [Tenable Identity Exposure Deployment](#)
- [Resource Sizing](#)
- [Hardware Requirements](#)
- [Network Requirements](#)
- [Web Portal Requirements](#)
- [Integration with an Active Directory Domain](#)
- [Prerequisites Checklist](#)

See the following sections in the Tenable Identity Exposure Administrator Guide:

- [Access to AD Objects or Containers](#)
- [Access for Privileged Analysis](#)

On-premises Architectures

The Tenable Identity Exposure platform relies on several Windows services hosted on virtual machines (VMs). Your environment must support the following infrastructure:

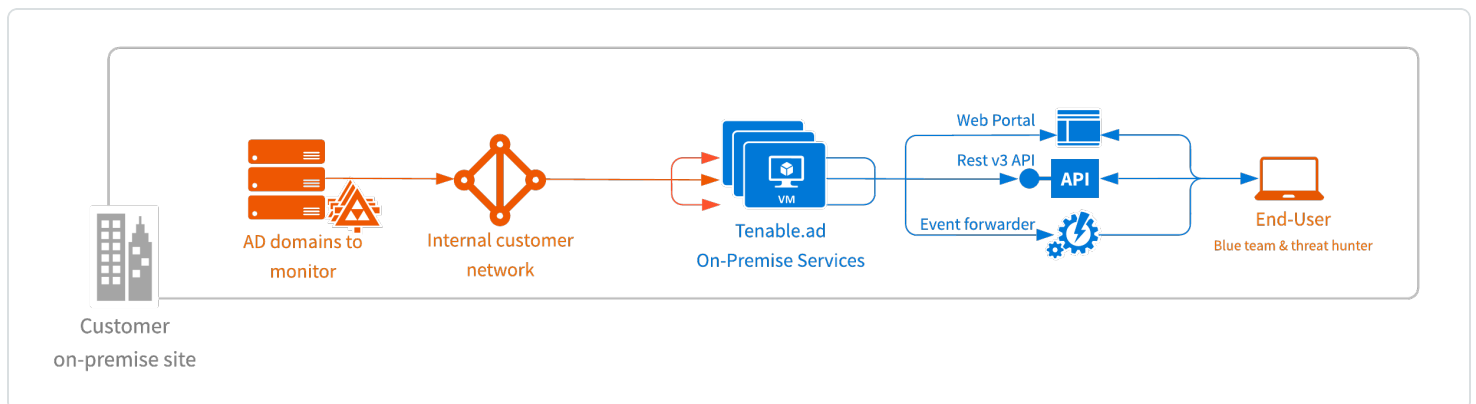



The Tenable Identity Exposure platform consists of three components: Directory Listeners, Security Engine Nodes, and Storage Managers.

- The **Directory Listeners**: working closely with the monitored domain controllers, the Directory Listeners receive real-time Active Directory flows and apply several treatments to decode, isolate, and correlate security changes.
- The **Security Engine Nodes**: hosting analysis-related services, the security engine nodes support the Tenable Identity Exposure security engine, internal communication bus, and end-user applications (such as the Web portal, the REST API, or the alert notifier). This component builds on different isolated Windows services.
- The **Storage Managers**: providing hot and cold storage support, the Storage Managers oversee serving data to the Directory Listeners and the Security Engine Nodes. This component is the only one that must remain persistent to save information. Internally, they use Microsoft MS SQL Server to store internal data and configuration.

For the number and sizing of these components, see [Resource Sizing](#).


Architectures

Tenable Identity Exposure's on-premises solution uses a software package hosted in a dedicated Windows Server environment that you provide and manage, based on the following architectures:

Centralized Architecture

The centralized architecture hosts all Tenable Identity Exposure components in the same network zone.

- The main components (Directory Listeners, Security Engine Nodes, and Storage Managers) work side-by-side and can communicate with each other without any network filtering.
- To ensure proper network security, Tenable recommends that you secure this architecture with a firewall at the entrance to the zone. The following illustration shows the ingoing and outgoing network flows as described in the [Network Flow Matrix](#).

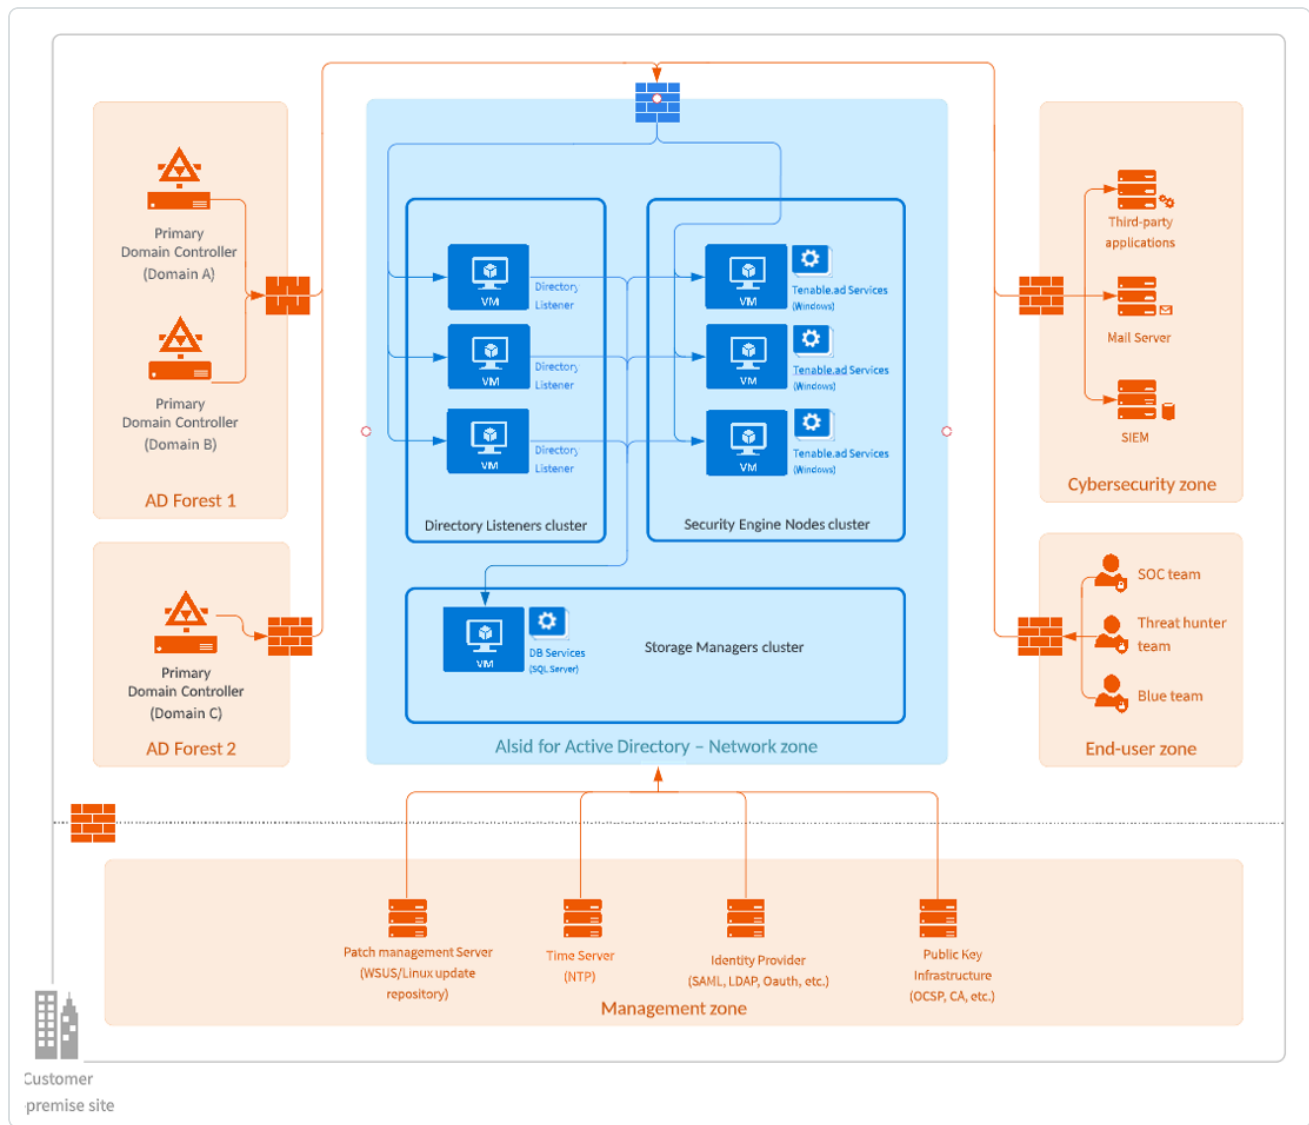

Advantages – This architecture offers the best balance between manageability and security:


- Each Tenable Identity Exposure service is at the same logical place behind a unique firewall.
- Each service flow (Active Directory, end-users, alerts, etc.) goes through the same network equipment.
- This architecture links new Active Directory domains easily because it does not need service or extra configuration on the targeted domains.

Disadvantages – The centralized architecture can consume bandwidth because it must transfer each Active Directory flow from the monitored domain controllers to the Tenable Identity Exposure network zone.

Tip: Tenable recommends using the centralized architecture because it offers better flexibility and easier deployment.

Distributed Architecture

The distributed architecture places Directory Listeners in the same network zone as the domain controllers, and hosts the Security Engine Node and the Storage Manager in another network zone, as shown in the following illustration:

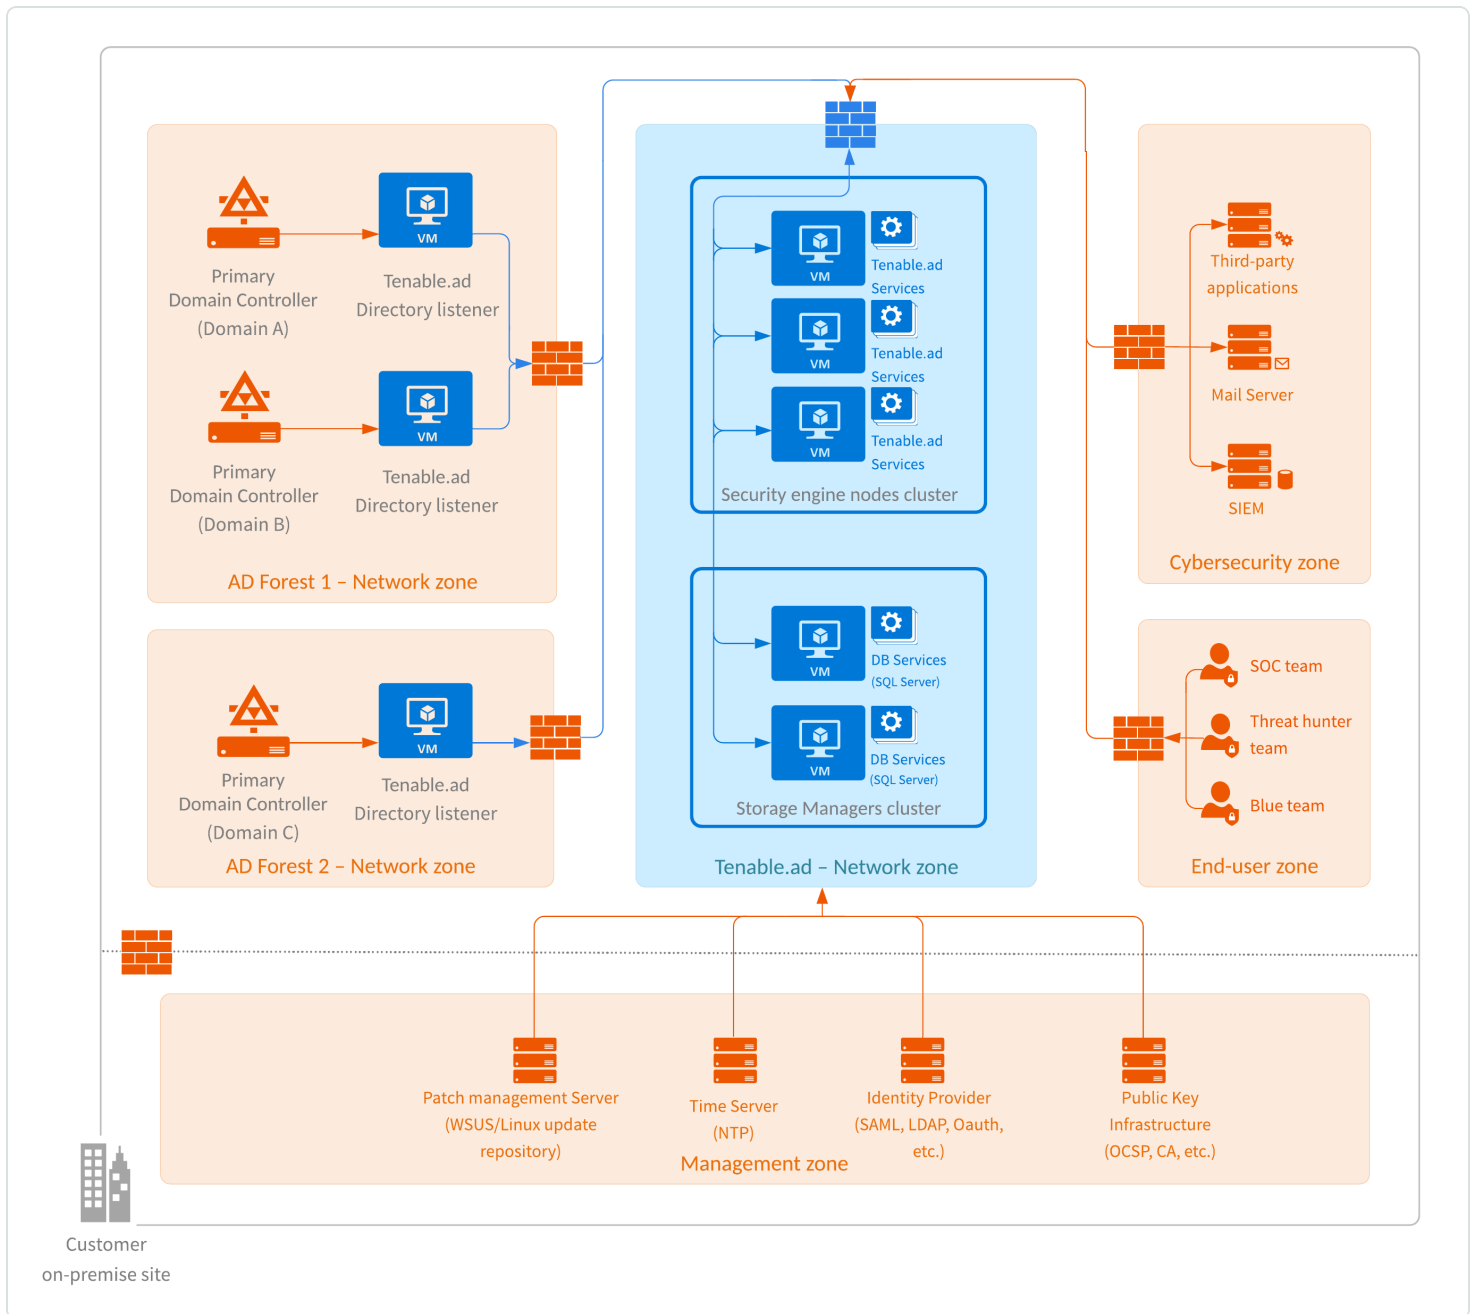



Advantages

- **Bandwidth reduction:** Active Directory flows can be significant when monitoring large directories. By filtering relevant security changes and compressing the objects, the Directory Listeners reduce the bandwidth that the platform uses.
- **Better network filtering:**
 - An Active Directory infrastructure requires the use of numerous TCP and UDP ports which can be targets during a cyberattack. Following the principle of least privilege, Tenable recommends that you expose only these network ports when it is strictly necessary.
 - By placing Directory Listeners in the same network zone as the domain controllers, Tenable Identity Exposure does not need to expose Active Directory ports to another network zone.
- **Isolated infrastructure:** Specific contexts sometimes require a complete isolation of the Active Directory infrastructure from the rest of the information system. Using the distributed architecture, Tenable Identity Exposure's platform only requires one inbound and one outbound network flow, which preserves the security of the isolated infrastructure.
- **Network security:** Tenable Identity Exposure's Directory Listeners use a specific host-based firewall. Tenable also recommends that you use a specific firewall at the entrance of the zone hosting the Security Engine Nodes and Storage Managers. For more information on inbound and outbound network flows, see [Network Flow Matrix](#).

Disadvantages – Tenable only recommends this architecture for highly sensitive environments that require high-level network isolation.

- The distributed architecture is more complex to deploy and to maintain because it requires multiple network configurations in different network locations.
- This architecture is also less flexible since it requires the deployment of new Directory Listeners each time the customer wants to add a new domain to monitor.


Tenable Identity Exposure Deployment

You install Tenable Identity Exposure as an application package hosted in a dedicated Windows environment that must fulfill specific hosting specifications. Tenable Identity Exposure requires access to the operating system's master image on the system where you install it.



Required account permissions: The account you use to deploy Tenable Identity Exposure must have these specific permissions: `SeBackupPrivilege`, `SeDebugPrivilege`, and `SeSecurityPrivilege`.

Tenable preconfigures the application package with only Tenable services and your specific requirements. This deployment option offers maximum flexibility and integrates seamlessly into your specific environment.

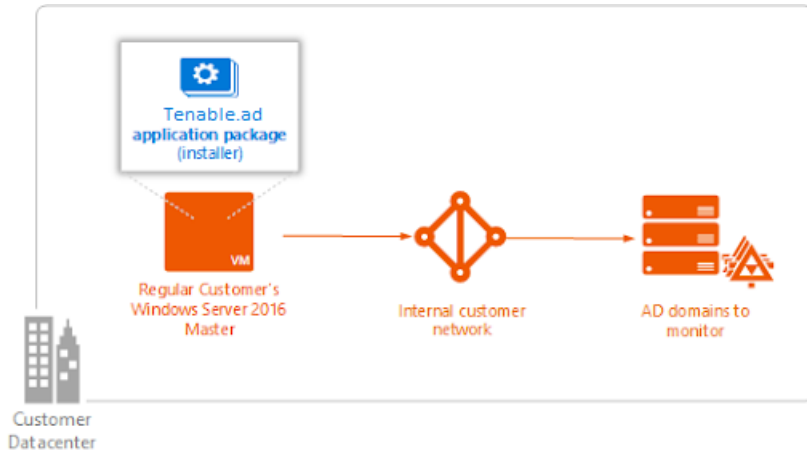

Note: Tenable Identity Exposure runs on a micro-services architecture embedded into Windows services. These services have a dedicated purpose (storage, security analysis, application, etc.) and all are mandatory. Consequently, you can only install Tenable Identity Exposure on operating systems supporting the micro-services model.

Unsupported Configurations

The following table details unsupported configurations:

Configuration	Description
Active anti-virus or Endpoint Detection and Response (EDR) solution	<p>The Tenable Identity Exposure platform requires intensive disk I/O.</p> <ul style="list-style-type: none">• Using anti-virus and EDR can drastically decrease platform performances.• You must have an exception to allow Tenable Identity Exposure services and data folder.



FIPS-compliant algorithms	For data privacy reasons, do not activate Federal Information Processing Standards (FIPS)-compliant algorithms for encryption.
Firewalls	Do the following to allow Tenable Identity Exposure services to communicate with each other to have reliable security monitoring: <ul style="list-style-type: none">• Disable local firewall rules preventing outgoing traffic.• Grant local firewall rules to allow incoming traffic on Tenable Identity Exposure services.
Erlang	<ul style="list-style-type: none">• Do not customize the HOMEDRIVE environment variable.• The PATHEXT environment variable must contain the .exe and .bat file extensions.

Third-Party Applications

Deploying Tenable Identity Exposure's platform in a non-certified environment can create unexpected side effects.

In particular, the deployment of third-party applications (such as a specific agent or daemon) in the master image can cause stability or performance issues.

Tenable strongly recommends that you reduce the number of third-party applications to a minimum.

Access Rights

Tenable Identity Exposure's platform requires local administrative rights to operate and ensure a proper service management.



- You must provide the Tenable technical lead with the credentials (username and password) associated with the administrative account of the host machine.
- When deploying to a production environment, consider a password renewal process that you validate jointly with the Tenable technical lead.

Product Updates

As part of its upgrade program, Tenable frequently publishes updates to its systems to provide new detection capabilities and new product features.

- In this deployment, Tenable only provides updates for Tenable Identity Exposure components. You must ensure a proper management of your operating systems, including the frequent deployment of security patches. For more information about Tenable Identity Exposure releases, see the [Tenable Identity Exposure Release Notes](#).
- Tenable Identity Exposure's micro-services architecture supports the immediate application of operating system patches.

Resource Sizing

To ensure correct behavior, the Tenable Identity Exposure components — **Storage Manager**, **Security Engine Nodes**, and **Directory Listener** — require a certain amount of memory and computing power.

- These required resources scale depending on the size of the Active Directory (AD) infrastructure that you monitor.
- Tenable Identity Exposure uses the number of active users as a metric to compute the sizing requirements. This includes the regular user accounts and the service accounts that applications use.

To compute the AD volume:

- Run the following PowerShell command line on each Active Directory domain to monitor:

```
Import-Module ActiveDirectory
(Get-ADUser -Server "dc.domain.com" -Filter 'enabled -eq $true').Count
```

where:



- -Server specifies the Active Directory Domain Services (ADDS) instance to connect to.
- `dc.domain.com` is the fully qualified domain name (FQDN) of the domain controller to use for counting.

Sizing Requirements

After you compute the number of active users to monitor, see the following sections for the appropriate sizing requirements:

- The **Directory Listeners** receive real-time Active Directory flows.

Required sizing for the system hosting the Directory Listener components:

Directory Listener				
Active AD users	Instance required	vCPU (per instance)	Memory (per instance)	Disk space (per instance)
1 – 25,000	1 virtual machine	2 cores on 2 sockets	16 GB of RAM	30 GB (Silver)
25,001 – 50,000	1 virtual machine	4 cores on 2 sockets	16 GB of RAM	30 GB (Silver)
50,001 – 75,000	1 virtual machine	4 cores on 2 sockets	32 GB of RAM	30 GB (Silver)
75,001 – 100,000	1 virtual machine	4 cores on 2 sockets	32 GB of RAM	30 GB (Silver)
100,001 – 150,000	1 virtual machine	8 cores on 2 sockets	64 GB of RAM	30 GB (Silver)
150,001 – 300,000	1 virtual machine	8 cores on 2 sockets	64 GB of RAM	30 GB (Silver)
300,001 – 500,001+	1 virtual machine	8 cores on 2 sockets	64 GB of RAM	30 GB (Silver)



- The **Security Engine Nodes** support Tenable Identity Exposure's security engine, storage services, and end users.

Required sizing for the system hosting the Security Engine Node components:

Security Engine Node				
Active AD users	Instance required	vCPU (per instance)	Memory (per instance)	Disk space (per instance)
1 – 25,000	1 virtual machine	8 cores on 2 sockets	16 GB of RAM	200 GB (Gold)
25,001 – 50,000	1 virtual machine	8 cores on 2 sockets	32 GB of RAM	300 GB (Gold)
50,001 – 75,000	1 virtual machine	10 cores on 3 sockets	32 GB of RAM	300 GB (Gold)
75,001 – 100,000	1 virtual machine	12 cores on 4 sockets	64 GB of RAM	400 GB (Gold)
100,001 – 150,000	1 virtual machine	16 cores on 4 sockets	96 GB of RAM	400 GB (Gold)
Split Security Engine Node				
150,001 – 300,000	5 virtual machines	VM1: 8 cores on 2 sockets	VM1: 16 GB of RAM	VM1: 1 TB
		VM2: 8 cores on 4 sockets	VM2: 16 GB of RAM	VM2: 300 GB
		VM3: 16 cores on 4 sockets	VM3: 32 GB of RAM	VM3: 100 GB
		VM4: 16 cores on 4 sockets	VM4: 16 GB of RAM	VM4: 100 GB
		VM5: 16 cores on 4 sockets	VM5: 48 GB of RAM	VM5: 100 GB



300,001 – 500,001+	5 virtual machines	VM1: 8 cores on 2 sockets	VM1: 16 GB of RAM	VM1: 1 TB
		VM2: 8 cores on 4 sockets	VM2: 16 GB of RAM	VM2: 300 GB
		VM3: 12 cores on 4 sockets	VM3: 32 GB of RAM	VM3: 100 GB
		VM4: 16 cores on 4 sockets	VM4: 32 GB of RAM	VM4: 100 GB
		VM5: 16 cores on 4 sockets	VM5: 64 GB of RAM	VM5: 100 GB

- The **Storage Manager** provides hot and cold storage support for the Directory Listeners and the security nodes services.

Required sizing for the system hosting the Storage Manager components:

Storage Manager				
Active AD users	Instance Required	vCPU (per instance)	Memory (per instance)	Disk Space (per instance)
1 – 25,000	1 virtual machine	8 cores on 2 sockets	16 GB of RAM	600 GB
25,001 – 50,000	1 virtual machine	8 cores on 2 sockets	16 GB of RAM	800 GB
50,001 – 75,000	1 virtual machine	12 cores on 4 sockets	32 GB of RAM	1.2 TB
75,001 – 100,000	1 virtual machine	12 cores on 4 sockets	32 GB of RAM	2 TB
100,001 – 150,000	1 virtual machine	12 cores on 4 sockets	64 GB of RAM	4 TB
150,001 – 300,000	1 virtual machine	16 cores on 4 sockets	64 GB of RAM	6 TB



300,001 – 500,001+	1 virtual machine	16 cores on 4 sockets	128 GB of RAM	8 TB
--------------------	-------------------	-----------------------	---------------	------

For information about disk performance, see [Storage Manager Disk Requirements](#).

Storage Policy Management

Gold, silver, and bronze storage are different tiers or levels of storage services based on performance, reliability, and cost. Definitions may vary among providers.

- Gold is the highest tier with the best performance and reliability, suitable for critical workloads.
- Silver is a mid-tier option with balanced performance and cost.
- Bronze is the lower tier with lower performance and reliability, often chosen for less critical workloads.

Sizing Example

An Information System made of three Active Directory domains has the following sizing.

Domain	Number of Active AD users
Domain A	45,000
Domain B	15,000
Domain C	150
Total:	60,150

Following the sizing matrix, this Tenable Identity Exposure deployment requires the following resources.

Tenable Identity Exposure services	Instance Required	vCPU (per instance)	Memory (per instance)	Disk Space (per instance)
Directory Listeners	1	4 cores, at least 2.6 GHz	32 GB of RAM	30 GB
Security Engine Nodes	1	10 cores, at least 2.6 GHz	32 GB of RAM	300 GB



Storage Managers	1	12 cores, at least 2.6 GHz	32 GB of RAM	1.2 TB with 10,000 IOPs
------------------	---	----------------------------	--------------	-------------------------

Storage Manager Disk Requirements

As part of its security analysis, Tenable Identity Exposure stores the differences for each Active Directory (AD) change either from the AD database or the Sysvol network share.

The **Storage Manager** component oversees the storage of these events using the following:

- An event log storage for attacks related events
- A Microsoft SQL Server instance for all other events

Tenable provides both minimum and recommended hardware requirements depending on your Active Directory activity:

- A minimum sizing configuration to start and run the platform in most infrastructures.
- A recommended sizing configuration to cover the needs of most event-intensive AD infrastructures.

Tenable Identity Exposure also requires the implementation of a specific disk layout to store the different database files and to ensure that I/O performances are compatible with its activity.

Due to the amount of Active Directory data it processes, Tenable Identity Exposure is a disk-intensive application. To avoid any bottleneck introduced by the storage (disk or SAN), Tenable Identity Exposure offers a minimal and recommended configuration.

- As with sizing, the minimal disk performances generally cover the needs of most infrastructures.
- The recommended infrastructure offers better experience for large or active AD infrastructures.

Supported and Recommended Disk Layout

Some specific environments require splitting the database files across different disks:

- One data file disk
- One temporary DB disk
- One log file disk
- (Optional) 1 backup disk



Minimum and Recommended Disk Sizing

The following tables describe the minimal and recommended disk sizing to store six months of Active Directory events in Tenable Identity Exposure.

Storage managers – Disk Sizing Matrix							
Active AD users	Disk Space (per instance)	Data File Disk Space		Log File Disk Space		TempDb Disk Space	
		Minimum	Recommended	Minimum	Recommended	Minimum	Recommended
1 – 25,000	600 GB	340 GB	375 GB	100 GB	200 GB	10 GB	25 GB
25,001 – 50,000	800 GB	400 GB	500 GB	125 GB	250 GB	25 GB	50 GB
50,001 – 75,000	1.2 TB	600 GB	775 GB	150 GB	350 GB	50 GB	75 GB
75,001 – 100,000	2 TB	725 GB	1.3 TB	200 GB	600 GB	75 GB	100 GB
100,001 – 150,000	4 TB	1.6 TB	3 TB	300 GB	800 GB	100 GB	200 GB
150,001 – 300,000	6 TB	2.45 TB	4.7 TB	400 GB	1 TB	150 GB	300 GB
	8 TB	3.3 TB	6.4 TB	500 GB	1.2 TB	200 GB	400 GB



300,00							
1 -							
500,00							
1+							

Minimum and Recommended Disk Performance

The limiting factor of the database is usually the underlying disk performances. The better disk throughput/IOPS, the better overall performances of Tenable Identity Exposure are. A low latency is also necessary (<5 ms).

Storage managers – Disk Performance Matrix				
Active AD users	Minimal Disk Performance		Recommended Disk Performance	
	Throughput (MB/sec)	IOPs (read/write)	Throughput (MB/sec)	IOPs (read/write)
1 - 25,000	150	2,500	300	5,000
25,001 - 50,000	200	5,000	400	10,000
50,001 - 75,000	200	5,000	400	10,000
75,001 - 100,000	200	5,000	400	10,000
100,001 - 150,000	250	7,500	500	15,000
150,001 - 300,000	250	7,500	500	15,000
300,001 - 500,001+	500	16,000	1,000	32,000

Hardware Requirements

Tenable Identity Exposure requires the following hardware:



- Supported Microsoft Windows Operating Systems
 - Windows Server 2016
 - Windows Server 2019
 - Windows Server 2022
- The requirements described in the sizing sections are for the well-being of Tenable Identity Exposure's platform; they do not include the operating system requirements of an application package-based deployment.
- CPU speed must be at least 2.6 GHz.
- Tenable Identity Exposure's platform supports the x86-64 processor architecture (at least Sandy Bridge or Piledriver) with Intel Turbo Boost Technology 2.0.
- One required network interface: you can add other network interfaces for administration, monitoring, or any other reason.

Network Requirements

Tenable Identity Exposure requires access to your Active Directory infrastructures to initiate security monitoring. You must allow network flows between the different Tenable Identity Exposure services as described in [Network Flow Matrix](#).

Bandwidth

As a monitoring platform, Tenable Identity Exposure receives Active Directory events continuously. Depending on the scale of the infrastructure, this process can generate a significant volume of data.

You must allocate an appropriate bandwidth to guarantee data transmission to Tenable Identity Exposure for analysis in a reasonable amount of time.

The following table defines the required bandwidth based on the size of the monitored AD.

Active AD Users	Average Number of Objects Received (per minute)	Minimum Bandwidth	Recommended Bandwidth
1 – 5,000	10	1 Mbps/sec	2 Mbps/sec
5,001 –	150	5 Mbps/sec	10 Mbps/sec



75,000			
75,001 – 400,000	700	15 Mbps/sec	30 Mbps/sec

Microsoft APIs

To subscribe to the replication flows and begin monitoring them, Tenable Identity Exposure must contact standard directory APIs from Microsoft. Tenable Identity Exposure only requires communication with the Primary Domain Controller emulator (PDCe) with a regular user account. You must also deploy a new group policy object (GPO) to activate the attack detection engine.

Communication with AD

For an on-premises installation, Tenable Identity Exposure is a software package that you deploy on your Windows Server environment. Tenable Identity Exposure must communicate with the monitored Active Directory.

Internet Access

Tenable provides a continuous integration process to allow regular releases of new detection capabilities and features. Tenable recommends that you plan an Internet access to upgrade Tenable Identity Exposure regularly.

Network Protocols

Specific network protocols (such as Syslog, SMTP or HTTP) allow Tenable Identity Exposure to offer native alerting features, the ability to design specific analysis flows bound to a Security Information and Event Management (SIEM) platform, and a REST API that can integrate into a cybersecurity ecosystem.


Network Flow Matrix

To do security monitoring, Tenable Identity Exposure must communicate with the Primary Domain Controller emulator (PDCe) of each domain. You must open network ports and transport protocols on each PDCe to ensure efficient monitoring.

In addition to these network flows, you must consider other network flows, such as:

- Access to the end-user services.
- The network flows between Tenable Identity Exposure services.
- The network flows from the support services that Tenable Identity Exposure uses, such as the update management infrastructure and the network time protocol.

The following network matrix diagram gives more details about the different services involved.

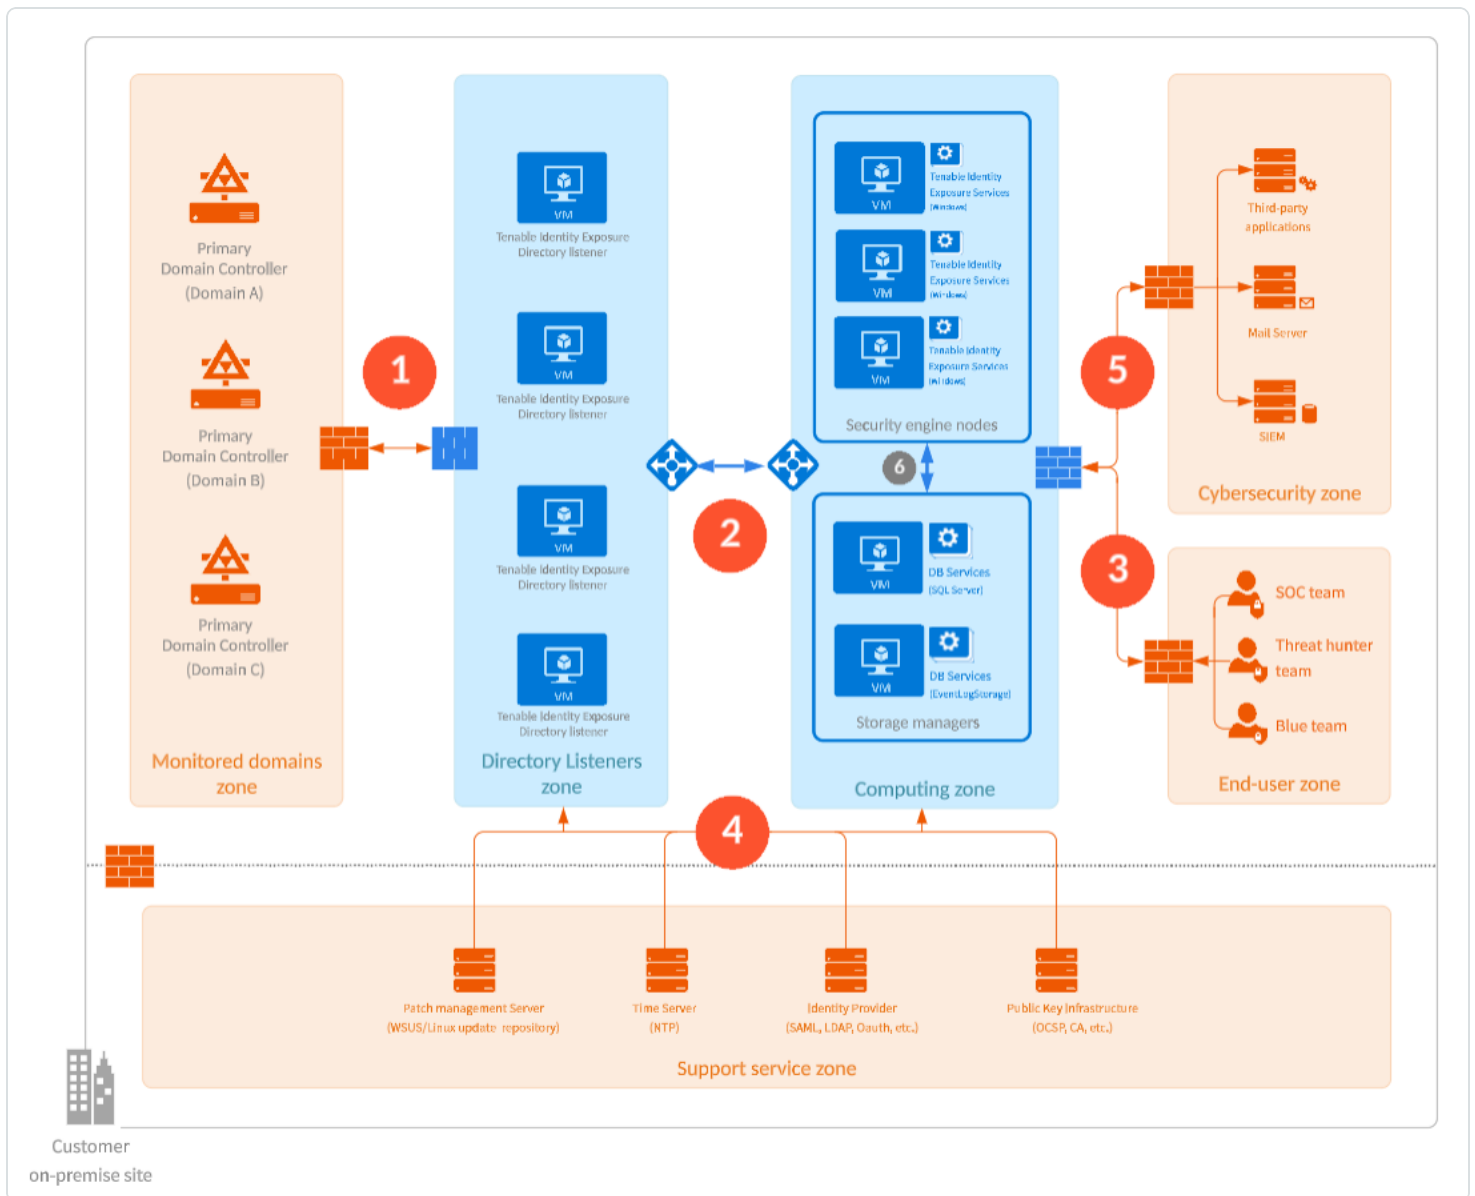

Required Protocols

Based on this diagram, the following table describes each required protocol and port that Tenable Identity Exposure uses.



Network Flows	From	To	Tenable Identity Exposure's Usage	Type of Traffic	Protocol and Port
1.	Tenable Identity Exposure's Directory Listeners	Domain controllers	Directory, Replication, User and Computer Authentication, Group Policy, Trusts	LDAP/LDAPS	TCP/389 and TCP/636 ICMP/echo-request ICMP/echo-response
			Replication, User and Computer Authentication, Group Policy, Trusts	SMB, CIFS, SMB2, DFSN, LSARPC, NbtSS, NetLogonR, SamR, SrvSvc	TCP/445
			User and Computer Authentication, Forest Level Trusts	Kerberos	TCP/88, TCP/464 and UDP/464
			User and Computer Authentication, Name Resolution, Trusts	DNS	UDP/53 and TCP/53
			Replication, User and Computer Authentication, Group Policy, Trusts	RPC, DCOM, EPM, DRSUAPI, NetLogonR, SamR, FRS	TCP Dynamic (> 1024)



			Directory, Replication, User and Computer Authentication, Group Policy, Trusts	Global Catalog	TCP/3268 and TCP/3269
			Replication	RPC Endpoint Mapper	TCP/135
2.	Tenable Identity Exposure's Directory Listeners	Tenable Identity Exposure's Security engine nodes	Tenable Identity Exposure's communication bus	Advanced Message Queuing Protocol	TCP/5671 and TCP/5672
			Tenable Identity Exposure's internal API flows (optional)	TLS/HTTP	TCP/443
3.	End users	Tenable Identity Exposure's Security engine nodes	Tenable Identity Exposure's end-user services (Web portal, REST API, etc.)	TLS/HTTP	TCP/443
4.	Tenable Identity Exposure	Support services	Time synchronization	NTP	UDP/123
			Update infrastructure (for example WSUS or SCCM)	HTTP/HTTPS	TCP/80 or TCP/443
			PKI	HTTP/HTTPS	TCP/80 or



			infrastructure		TCP/443
			Identity provider SAML server	TLS/HTTP	TCP/443
			Identity provider LDAP	LDAP/LDAPS	TCP/389 and TCP/636
			Identity provider OAuth	TLS/HTTP	TCP/443

Additional Flows

In addition to the Active Directory protocols, certain Tenable Identity Exposure configurations require additional flows. You must open these protocols and ports between Tenable Identity Exposure and the targeted service.

Network flows	From	To	Tenable Identity Exposure's Usage (optional)	Type of Traffic	Protocol and Port
5.	Tenable Identity Exposure's Security Engine Nodes	Cybersecurity services	Tenable Identity ExposureWeb Application	HTTP/TLS	TCP/443
			Email notifications	SMTP	TCP/25, TCP/587, TCP/465, TCP/2525, TCP/25025 (depending on the SMTP server's configuration)



			Syslog notifications	Syslog	TCP/601, TCP/6515, UDP/514 (depending on the event log server's configuration)
			Tenable REST API	HTTP/TLS	TCP/443

Ports

If you split the Security Engine Nodes and the Storage Managers into two different subnets, Tenable Identity Exposure requires access to the following ports.

Note: Tenable does not recommend separating the Security Engine Nodes and the Storage Manager services on different networks to avoid performance issues.

Network flows	From	To	Tenable Identity Exposure's Usage	Type of Traffic	Protocol and Port
6.	Tenable Identity Exposure's Security Engine Nodes	Tenable Identity Exposure's Storage Managers	MS SQL Server database access	MS SQL queries	TCP/1433
			EventLogStorage database access	EventLogStorage queries	TCP/4244

Support Services


Support services are often highly vendor or configuration-specific. For example, the WSUS service listens by default on port TCP/8530 for its 6.2 version and higher, but on TCP/80 for other versions. You can reconfigure this port to any another port.

Network Address Translation (NAT) support




Tenable Identity Exposure initiates all network connections, except those from end users. You can use network address translation (NAT) to connect to Tenable Identity Exposure through network interconnection.

On-premise platform

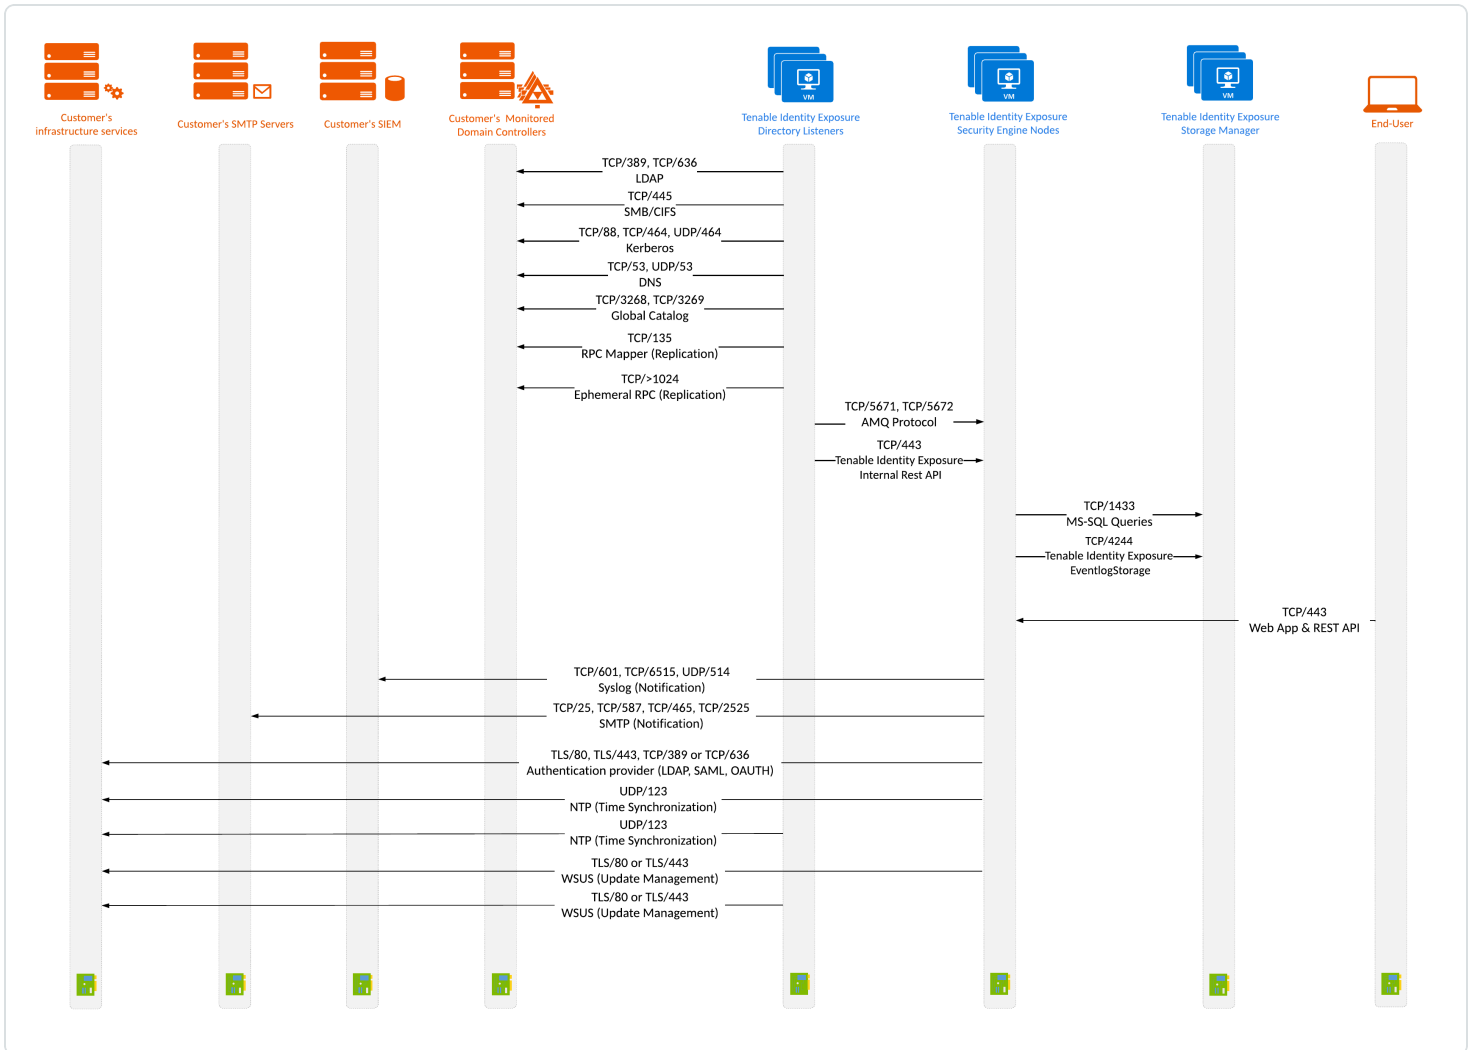


On-premise platform using Secure Relay

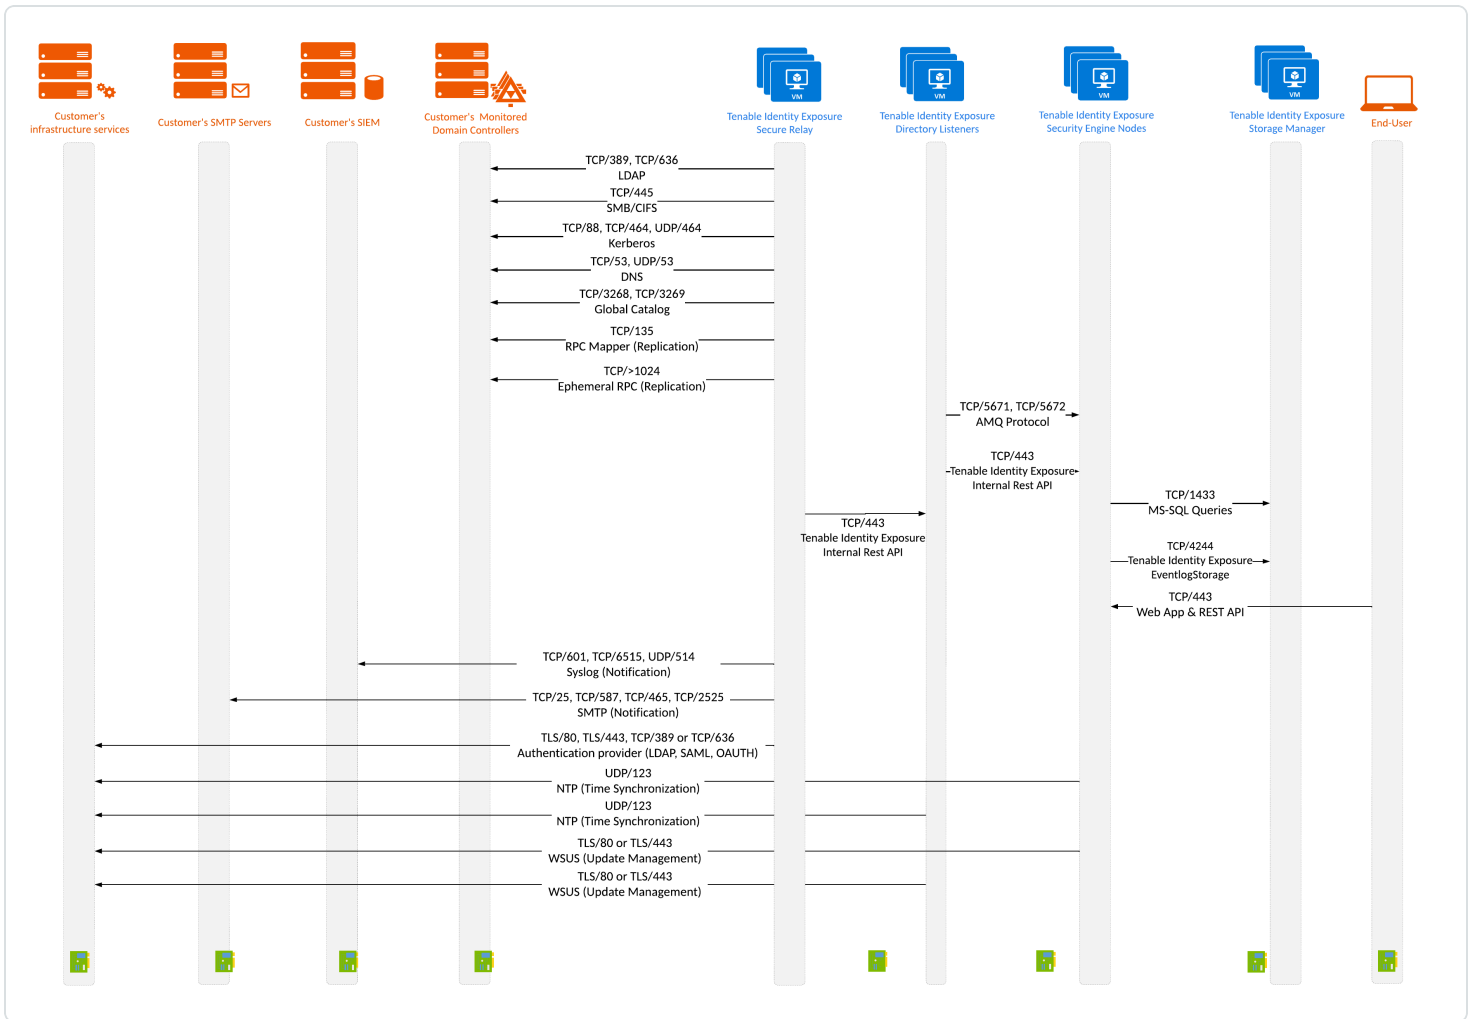

Network Matrix for Transport Layer Security (TLS) Mode

The illustration below shows the network matrix for a TLS platform with the required protocol and port.

Note: Tenable Identity Exposure does not support TLS versions earlier than 1.2.

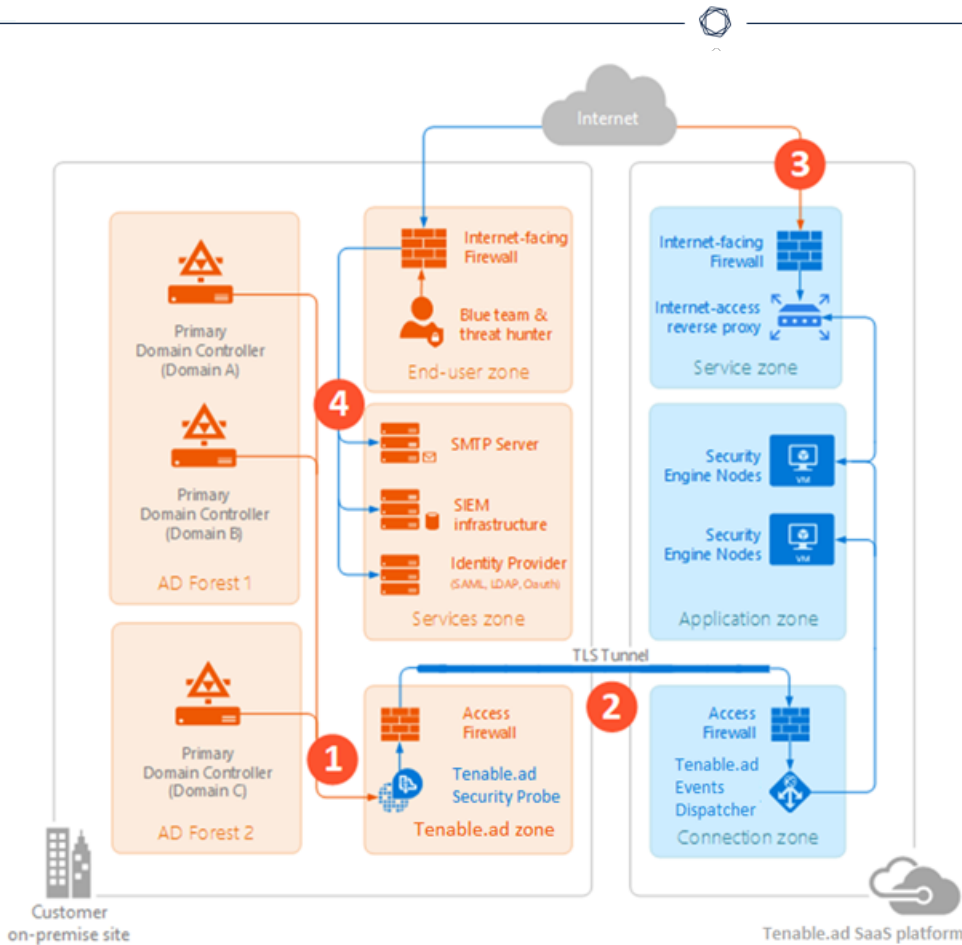

Based on this diagram, the networks flows are as follows:

Network Flows	To	From	Tenable's Usage	Type of Traffic	Protocol and Port
1.	Tenable Security Probe	Customer's Domain Controllers	Directory, Replication, User and Computer Authentication, Group Policy, Trusts	LDAP/LDAPS	TCP/389 and TCP/636 ICMP/echo-request ICMP/echo-response
			Replication, User and Computer Authentication, Group Policy,	SMB, CIFS, SMB2, DFSN, LSARPC, NbtSS, NetLogonR,	TCP/445



			Trusts	SamR, SrvSvc	
			User and Computer Authentication, Forest Level Trusts	Kerberos	TCP/88, TCP/464 and UDP/464
			User and Computer Authentication, Name Resolution, Trusts	DNS	UDP/53 and TCP/53
			Replication, User and Computer Authentication, Group Policy, Trusts	RPC, DCOM, EPM, DRSUAPI, NetLogonR, SamR, FRS	TCP Dynamic (> 1024)
			Directory, Replication, User and Computer Authentication, Group Policy, Trusts	Global Catalog	TCP/3268 and TCP/3269
			Replication	RPC Endpoint Mapper	TCP/135
2.	Tenable Security probe	Tenable Identity Exposure SaaS platform	Tenable's security probe TLS Tunnel	Advanced Message Queuing Protocol encrypted in	TCP/5671



				TLS	
3.	End-users	Tenable Identity Exposure SaaS platform	Tenable's end-user services (Web portal, REST API, etc.)	TLS/HTTP	TCP/443

Depending on your Tenable Identity Exposure configuration, you may need to allow additional flows by opening these protocols and ports between Tenable Identity Exposure and the targeted service.

Network Flows	To	From	Tenable's Usage (optional)	Type of Traffic	Protocol and Port
4.	Tenable Identity Exposure SaaS platform	Support services	Email notifications	SMTP	TCP/25, TCP/587, TCP/465, TCP/2525, TCP/25025 (depending on the SMTP server's configuration)
			Syslog notifications	Syslog	TCP/601, TCP/6515, UDP/514 (depending on the event log server's configuration)
			Tenable REST API	TLS /HTTP	TCP/443
			PKI infrastructure	HTTP/HTTPS	TCP/80 or TCP/443



			Identity provider SAML server	TLS/HTTP	TCP/443
			Identity provider LDAP	LDAP/LDAPS	TCP/389 and TCP/636
			Identity provider OAuth	HTTPS	TCP/443

Web Portal Requirements

Tenable Identity Exposure does not require any specific configuration or plugin from client browsers.

Supported Internet Browsers

You must use the most recent version of your supported web browser.

Supported Web Browsers including minimum version	
Microsoft	Edge version 38.14393 or Internet Explorer 11
Google	Chrome version 56.0.2924
Mozilla	Firefox version 52.7.3
Apple	Safari version 11.0

TLS Server Certificate

Tenable Identity Exposure uses SSL/TLS encryption mechanism to access its application.

Tenable strongly recommends using a valid certificate which you provide during installation.

Supported TLS configuration and version

- TLS 1.1 to TLS 1.3
- Self-signed certificate from Tenable



- Certificate issued from your private PKI
- Alternative TLS certificate

Recommended TLS configuration and version

- TLS 1.2
- Certificate issued from your private PKI

TLS certificate update

If you need to change your TLS certificates outside of an upgrade, you can update the CRT and key files under `Tenable\Tenable.ad\Certificates` and restart the services.

See also

- [HTTPS for Tenable Identity Exposure Web Application](#)

Integration with an Active Directory Domain

Tenable Identity Exposure runs on Microsoft Server operating systems that connect to an Active Directory (AD) domain. The following are guidelines on whether or not to connect these servers to an AD domain.

- Because Tenable Identity Exposure offers sensitive security information, **Tenable does not recommend joining its servers to any AD domain.** In fact, working on an isolated environment allows for a clear separation between the monitored perimeter and the monitoring entity (i.e., Tenable Identity Exposure). In this configuration, an attacker with initial access or limited privileges on the monitored domain cannot directly access Tenable Identity Exposure and its security analysis results.
- If you have a trustful infrastructure, you can choose to run Tenable Identity Exposure on domain-joined servers. This approach improves server management as it is part of the regular process that you use for each domain-joined server. In particular, Tenable Identity Exposure servers apply the same hardening policies as any other corporate server. Tenable recommends this architecture only on secure AD environments, and you must take into consideration the following risks in the case of an AD compromise:



- An attacker with server-administration privileges can gather more information about ways to compromise the system using data analysis from Tenable Identity Exposure.
- The security policy on domain-joined servers can forbid the administrative access granted to Tenable Support or its certified partners.
- An attack can corrupt Tenable Identity Exposure's security monitoring by hiding a security incident.

Prerequisites Checklist

- Tenable Identity Exposure works with Windows Server 2016 with the latest available update.
- Tenable Identity Exposure installation program requires Local Administrator rights on Windows Server 2016. If the account used for the installation is the default account, ensure that this account can run programs without restrictions.
- Tenable Identity Exposure services require Local Administrator rights to run local services on the machine.
- Tenable Identity Exposure requires a dedicated data partition. Do not run Tenable Identity Exposure on the OS partition to prevent system freeze if the partition is full.
- Tenable Identity Exposure SQL instance requires the virtual accounts usage feature.
- When installing or upgrading Microsoft SQL Server after implementing tighter security measures, the installation process fails due to insufficient user rights. Check that you have the necessary permissions for a successful installation. For more information, see the [Microsoft documentation](#).
- Tenable Identity Exposure must run as a black box. Dedicate each machine to Tenable Identity Exposure and do not share it with another product.
- Tenable Identity Exposure can create any folder starting with the 'Alsid' or 'Tenable' prefix on the data partition. Therefore, do not create folders starting with "Alsid" nor "Tenable" on the data partition.
- Erlang: Do not modify the HOMEDRIVE environment variable. The PATHEXT environment variable must contain the .exe and .bat file extensions.



- If you must set the AD service account of Tenable Identity Exposure as a Protected Users group member, ensure your Tenable Identity Exposure configuration supports [Kerberos authentication](#), because Protected Users cannot use NTLM authentication.

This table resumes the prerequisites in a handy checklist before installation.

Information or Resource to Reserve	Status
The required agreements (NDA, Evaluation Software License), if applicable	
The choice of architecture (centralized or distributed)	
The number of active AD users in the targeted domains to monitor	
The computing and memory resources based on Tenable Identity Exposure's sizing matrix.	
The private IP of each virtual machine used to deploy Tenable's platform	
The type and IP address of the update management infrastructure	
The type and IP address of the time server	
The type and IP address of the PKI server	
The type and IP address of the identity provider	
Open required network flows for each service that Tenable Identity Exposure requires.	
The private IP addresses of each Primary Domain Controller emulator	
Creation of a regular user account on each Active Directory forest to monitor.	
On the specific Active Directory containers, grant access right to the Tenable service account.	
Grant access for Privileged Analysis if you want to enable this feature.	
The AD domain user account login: <ul style="list-style-type: none">• Format: User Principal Name, for example "tenablead@domain.example.com" (recommended for Kerberos compatibility) or NetBIOS, for example "DomainNetBIOSName\SamAccountName".	



<p>A TLS certificate issued for Tenable Identity Exposure's Web Portal issued from the customer's PKI</p> <ul style="list-style-type: none">• Otherwise, inform Technical Lead of the use of self-signed certificate.	
<p>The list of Tenable Identity Exposure user accounts to create:</p> <ul style="list-style-type: none">• Required information: first and last name, email address, and desired login.	
<p>The list of optional configurations to activate (email notification, Syslog event forwarding, etc.)</p>	
<p>An identified and available project coordinator to work with Tenable.</p>	
<p>Technical staff to respond to potential technical issues such as network filtering issue and unreachable PDCe.</p>	



Install Tenable Identity Exposure

Tenable Identity Exposure's installation program installs the following components on three different machines:

- A Storage Manager (SM) to host all data based on MSSQL.
- A Directory Listener (DL) to target audited domains.
- A Security Engine Node (SEN) to perform security analysis and serve the user interface.

For more information about how to install the SEN on several machines, see [Split Security Engine Node \(SEN\) Services](#).

All three machines and installed binaries support the application of any security update for the underlying OS, either through Windows Server Update Services (WSUS) or System Center Configuration Manager (SCCM).

For more information about different TLS setups, see [Installation Options](#).

Installation Program

The Tenable Identity Exposure executable program from [Tenable's Downloads site](#) is the main installer for most on-premises and SaaS (excluding SaaS-TLS) deployments.

For SaaS-TLS deployments, you must download the Tenable Identity Exposure Security Probe installer. You must also have your customized `certs.zip` file containing the required certificates that the Tenable Identity Exposure team provides.

Starting from version 3.11, the Tenable Identity Exposure Security Probe Installer is only compatible with SaaS-TLS deployments. To install a Directory Listener node, you must use the Tenable Identity Exposure Installer file and select the "Directory Listener" component only.

Note: Tenable requires that you reboot all machines before you start a new installation.

Before you start

Reserve the following resources and have their information on hand before you install Tenable Identity Exposure:



- Network – Private IP addresses.
- Access – DNS name used to access Tenable Identity Exposure’s web portal.
- Security – TLS certificate and its associated private key to secure access to the web portal.

For more information, see [Network Requirements](#).

Installation log file

If the installation program cannot install Tenable Identity Exposure on a machine, you can forward the log file to [our support](https://community.tenable.com/s/) (https://community.tenable.com/s/).

This log file is in your %tmp% folder, and its name always starts with “MSI” followed by random numbers, such as MSI65931.LOG.

To generate log files in another location (for example, if you placed the installer on the desktop):

1. In the command line of the local machine, type `cd desktop`.
2. Type `.\installername.exe /LOGS "c:\<path>\logmsi1.txt"`.

Installation Options

Tenable Identity Exposure offers the possibility to encrypt internal communications between Tenable Identity Exposure components (micro-services) for eventual cybersecurity policy requirements or regulatory reasons using Transport Layer Security (TLS).

Tenable Identity Exposure enables TLS on protocols by using HTTPS instead of HTTP, AMQPS (AMQP+TLS) instead of AMQP (Advanced Message Queuing Protocol), and TLS encryption for MS-SQL.



Note: This is not the same as the activation of HTTPS on the Tenable Identity Exposure web portal using an Internet Information Services (IIS) certificate.

Note: The TLS installations offered here concern TLS encryption between Tenable Identity Exposure components and are not related to SaaS-TLS deployments.

For more information about TLS, see [Network Matrix for Transport Layer Security \(TLS\) Mode](#).

Tenable Identity Exposure offers four types of TLS setups during the installation, from the least to the most hardened:

Installation Option	Recommended For	Encryption Between Internal Communications and Tenable Identity Exposure Components	Peer Verification	Installation Option to Select
No TLS	A trusted network of machines. An easy installation with little configuration.	Not encrypted	N/A	No TLS option in "Expert mode"
Default TLS (no "Expert mode")	An organization without its own internal public key infrastructure (PKI) that requires protection against passive eavesdropping.	Encrypted using an internal PKI for Tenable Identity Exposure with its own certificates and private keys, which the installation automatically generates and stores on the disk of the first machine.	Disabled Tenable Identity Exposure does not check server certificates. This setup is not resistant to active MITM attacks.	<i>Default</i>
Default TLS ("Expert mode")				<i>Default TLS using Autogenerated and Self-signed Certificates option in "Expert mode"</i>



Note: The default TLS installations – one that uses the "Expert" mode and one that does not – are essentially the same.

<p><u>Custom TLS Without Peer Verification</u></p>	<p>An organization with its own internal PKI that requires protection against passive eavesdropping.</p>	<p>Encrypted, using certificates from your internal PKI. Certificates must contain the IP address of the corresponding machine in the Subject Alternative Name (SAN) extension and a signature from the provided Certificate Authority (CA).</p>	<p>Disabled</p> <p>Tenable Identity Exposure does not check server certificates. This setup is not resistant to active MITM attacks.</p>	<p><i>TLS with Custom certificates without peer verification option in "Expert mode"</i></p>
<p><u>Custom TLS With Peer Verification</u></p>	<p>An organization with its own internal public key infrastructure (PKI) that requires protection against both passive eavesdropping and man-in-the-middle (MITM) attacks.</p>	<p>Encrypted, using certificates from your internal PKI. Certificates must contain the IP address of the corresponding machine in the Subject Alternative Name (SAN) extension and have a signature from the provided Certificate Authority (CA).</p>	<p>Enabled</p> <p>Tenable Identity Exposure checks server certificates. This setup is resistant to active MITM attacks.</p>	<p><i>TLS with Custom certificates with peer verification option in "Expert mode"</i></p>



Installation with Default TLS

Required User Role: Administrator on the local machine

This installation process installs the following Tenable Identity Exposure components in default TLS mode without peer verification and with self-signed certificates.

At each installation or upgrade, Tenable Identity Exposure generates a new self-signed certificate. The validity period for the certificate is 3650 days. After the installation or upgrade, the certificates are located at `C:\Tenable\Tenable.ad\DefaultPKI\Certificates`.

Order of installation


Install the components in the following order:

1. [Storage Manager](#)
2. [Security Engine Node](#)
3. [Directory Listener](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

To install the Storage Manager with default TLS:


1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.
A welcome screen appears.
2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

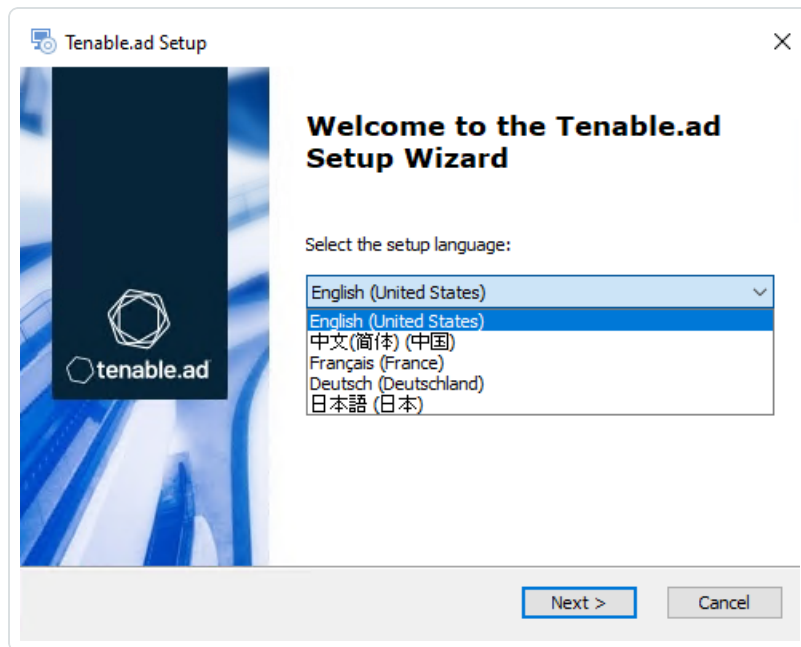

The **Setup Wizard** appears.


3. Click **Next**.

Note: Do not select the "Expert Mode" checkbox.

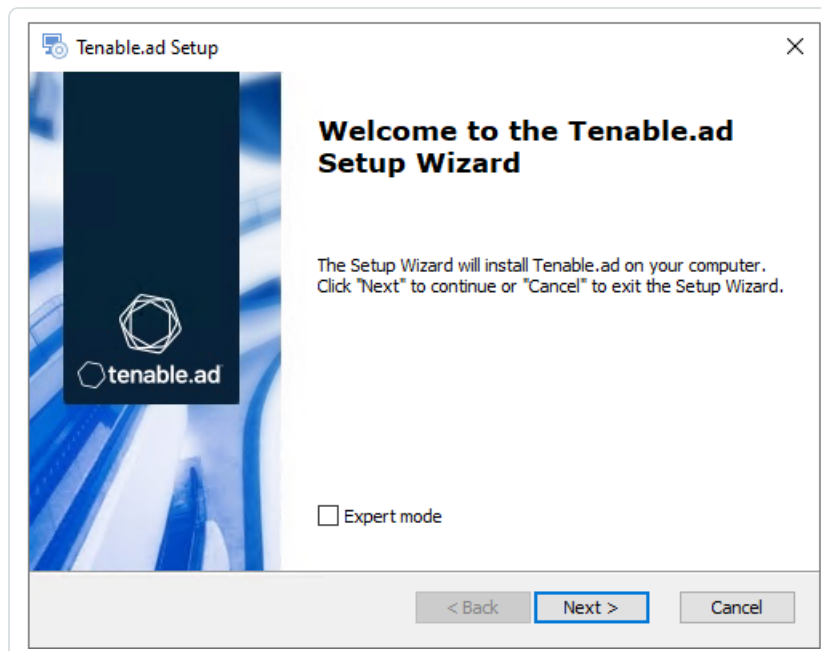

The **Custom Setup** window appears.

4. Deselect the *Security Engine Nodes* and *Directory Listener* components.

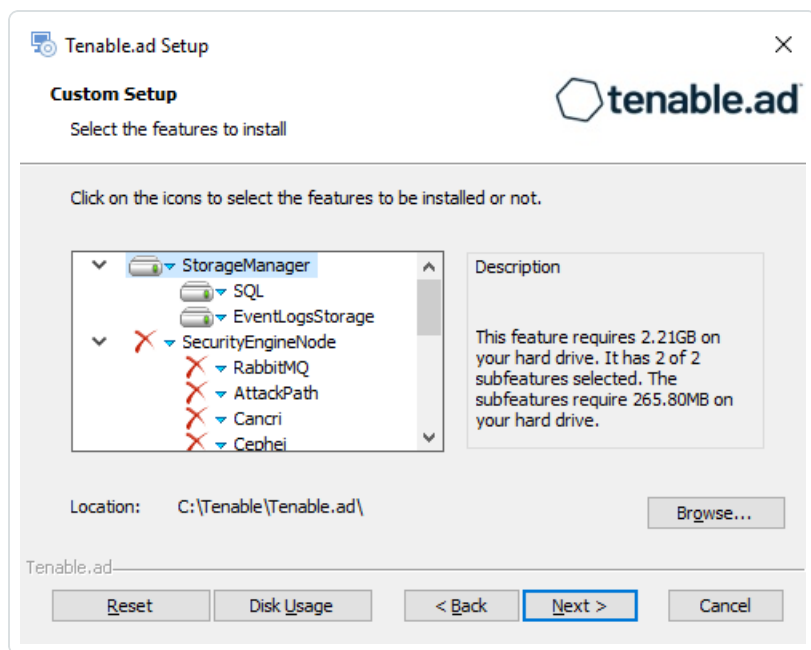

Note: Tenable strongly recommends that you keep the default TENABLE instance name.

5. Click **Next**.

The **Ready to Install** window appears.

6. Click **Install** to begin the installation.

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

7. Click **Finish**.

A dialog box asks you to restart your machine.

8. Click **No**.

Caution: Do not restart the machine now.

9. Install the Security Engine Node.


To install the Security Engine Node with default TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.




2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

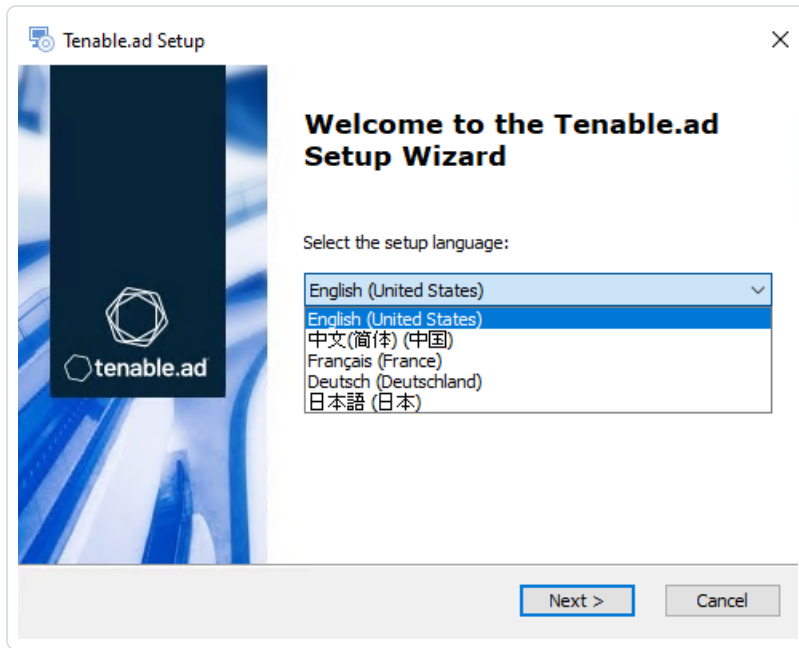

The **Setup Wizard** appears.

3. Click **Next**.

Note: Do not select the "Expert Mode" checkbox.

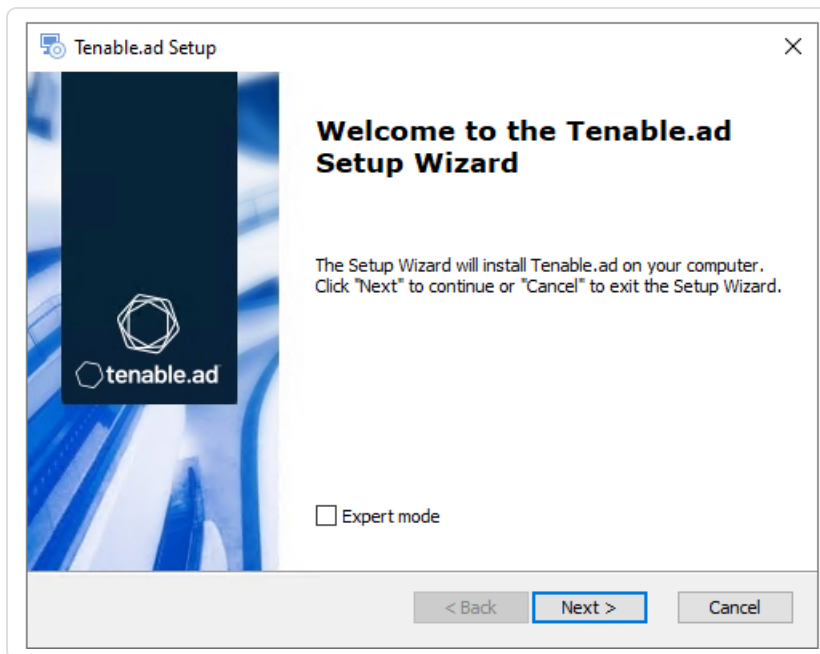




The **Custom Setup** window appears.

4. Deselect the *Storage Manager* and *Directory Listener* components.

Note: To install SEN services over several machines, see [Split Security Engine Node \(SEN\) Services](#).

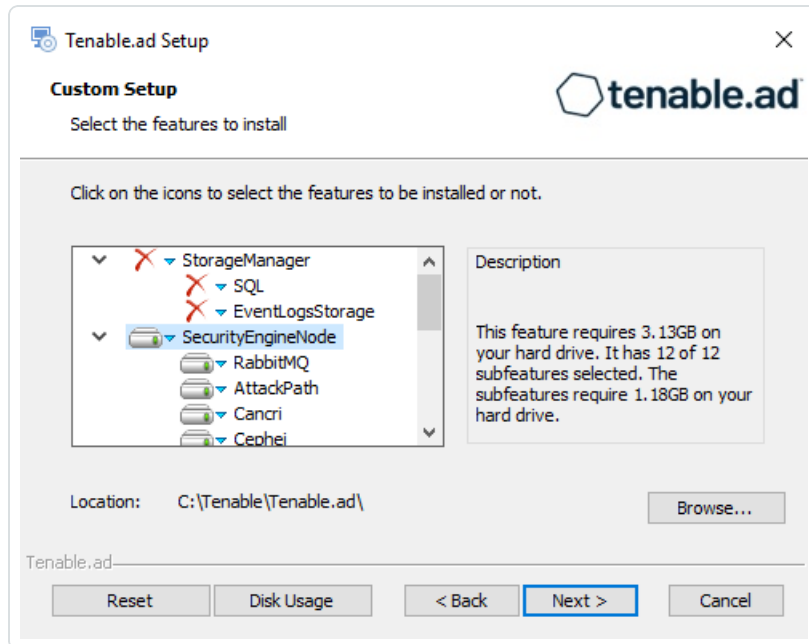

5. Click **Next**.

The **Storage Manager** window appears.

6. Provide the following information:
 - In the **MSSQL** and **Event Logs Storage** boxes, type the host name of the Storage Manager.
 - In the **Password** box, type the service account password for the MSSQL database defined in the Storage Manager installation.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the

SQL Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

MSSQL

IP	10.0.50.101
Port	1433
Password	••••••••
Instance Name	TENABLE
SQL UserDB Disk	C:\
SQL UserDB Log Disk	E:\
SQL TempDB Disk	F:\

Event Logs Storage

IP	10.0.50.101
Port	4244

Tenable.ad

< Back Next > Cancel

7. Click **Next**.

The **Security Engine Node** window appears.

8. In the **DNS name or IP** box, type the DNS name (preferred) or IP address of the web server that end users enter to access Tenable Identity Exposure.

Tenable.ad Setup

Security Engine Node
Fill in relevant fields

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

Kapteyn DNS name or IP 10.0.50.102

Tenable.ad

< Back Next > Cancel




Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

9. Click **Next**.

The **Ready to Install** window appears.

10. Click **Install** to begin the installation.

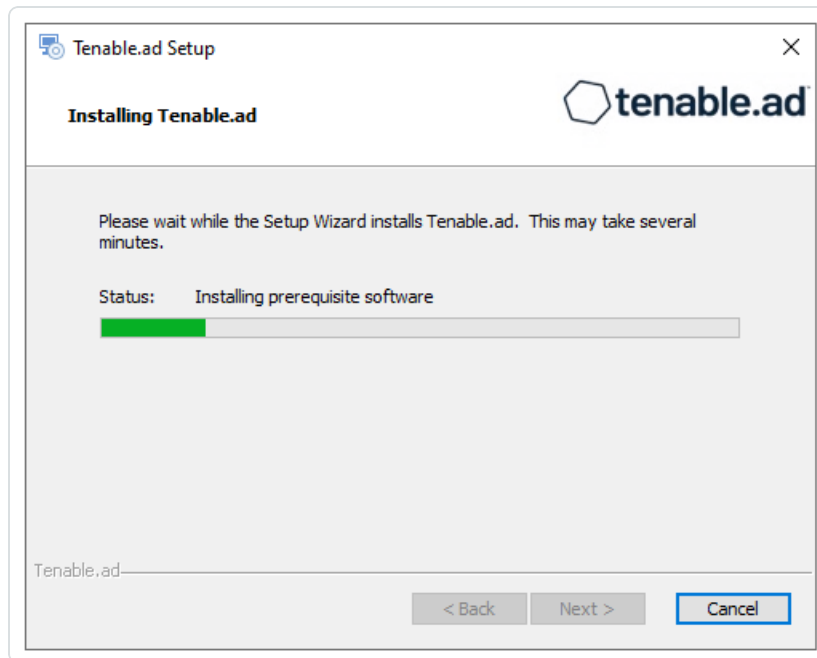

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

11. Click **Finish**.

A dialog box asks you to restart your machine.

12. Click **No**.

Caution: Do not restart the machine now.

13. Install the Directory Listener.


To install the Directory Listener with default TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.




2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

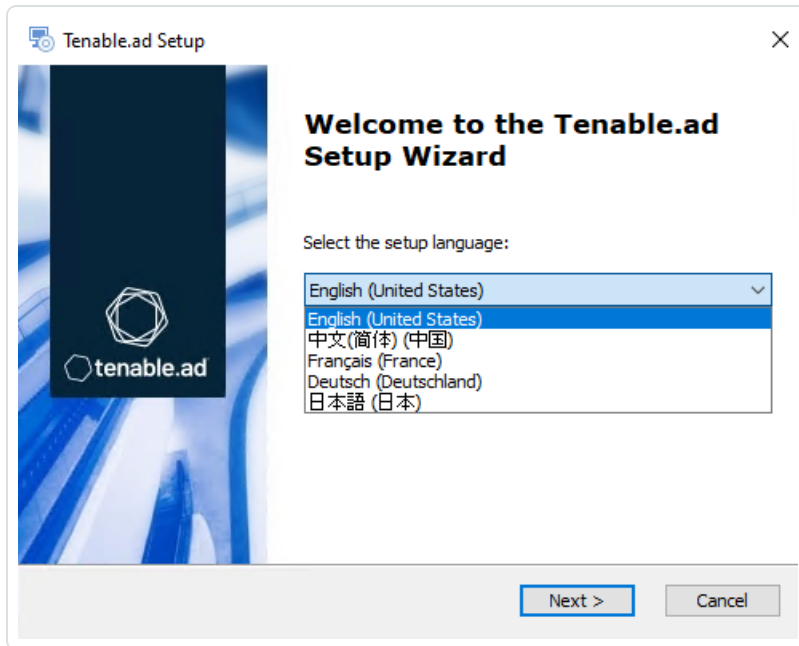

The **Setup Wizard** appears.


3. Click **Next**.

Note: Do not select the "Expert Mode" checkbox.

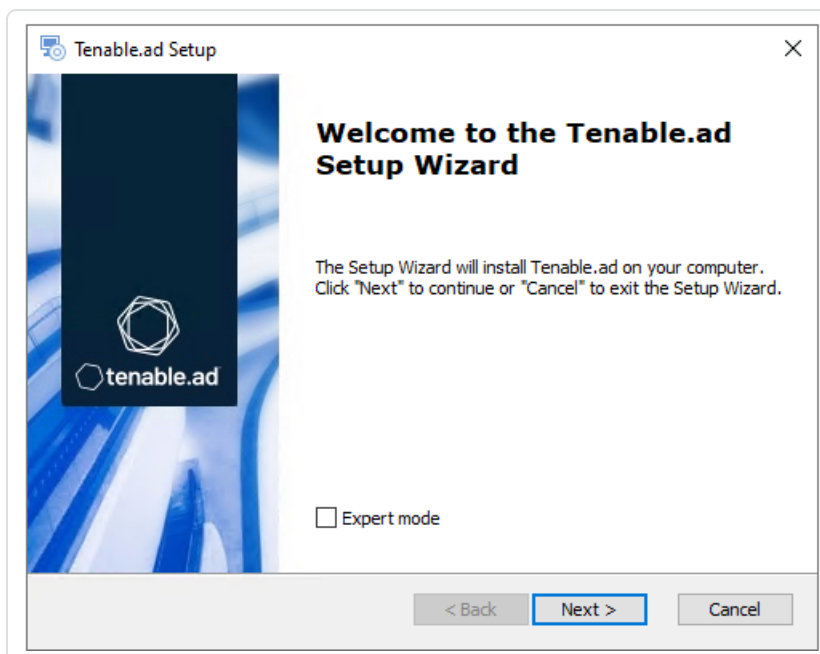

The **Custom Setup** window appears.


4. Deselect the *Storage Manager* and the *Security Engine Nodes* components.

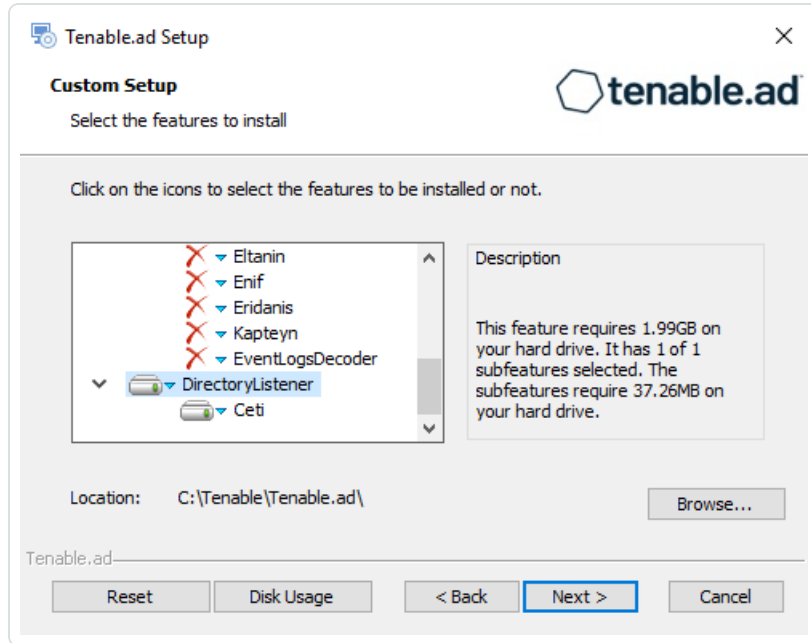

5. Click **Next**.

The **Security Engine Node** window appears.

6. In the **Host** box for RabbitMQ, type the host name of the Security Engine Node hosting RabbitMQ.

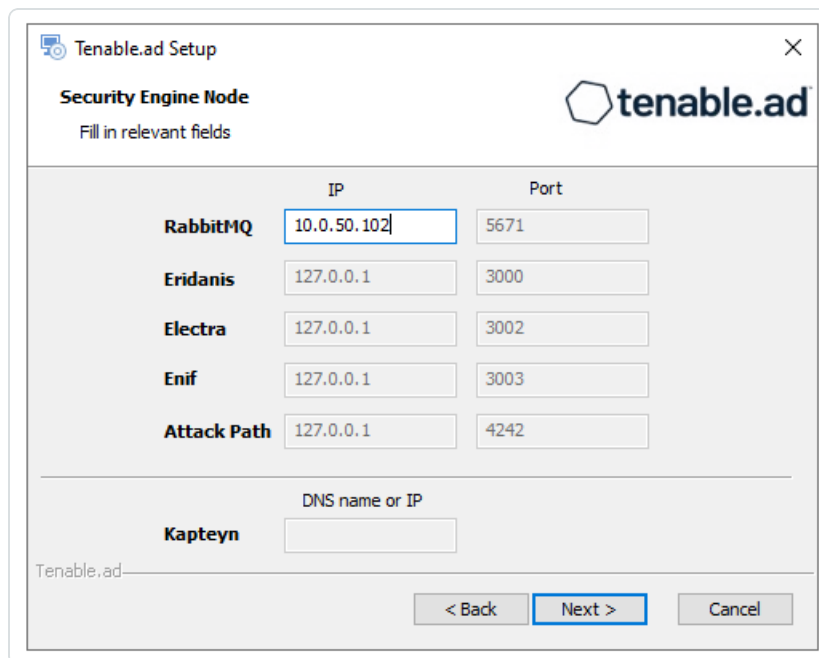




7. Click **Next**.

The **Ready to Install** window appears.

8. Click **Install** to begin the installation.

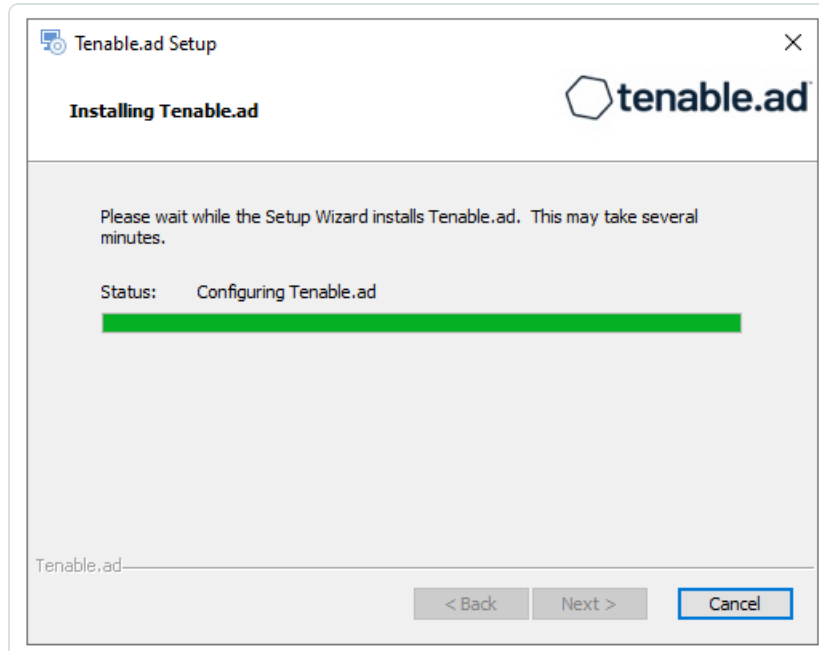

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

9. Click **Finish**.

A dialog box asks you to restart your machine.

10. Click **Yes**.

The machine restarts.

11. Restart the Security Engine Node.

12. Restart the Storage Manager.

See also

- [HTTPS for Tenable Identity Exposure Web Application](#)

Installation with Default TLS in "Expert Mode"

Required User Role: Administrator on the local machine



This installation process installs the following Tenable Identity Exposure components in TLS mode without peer verification and with automatically generated and self-signed certificates. It requires the "Expert Mode" setting in the Setup Wizard.

Order of installation

Install the components in the following order:

1. [Storage Manager](#)
2. [Security Engine Node](#)
3. [Directory Listener](#)


Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

To install the Storage Manager with default TLS using the "Expert Mode":

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.


2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

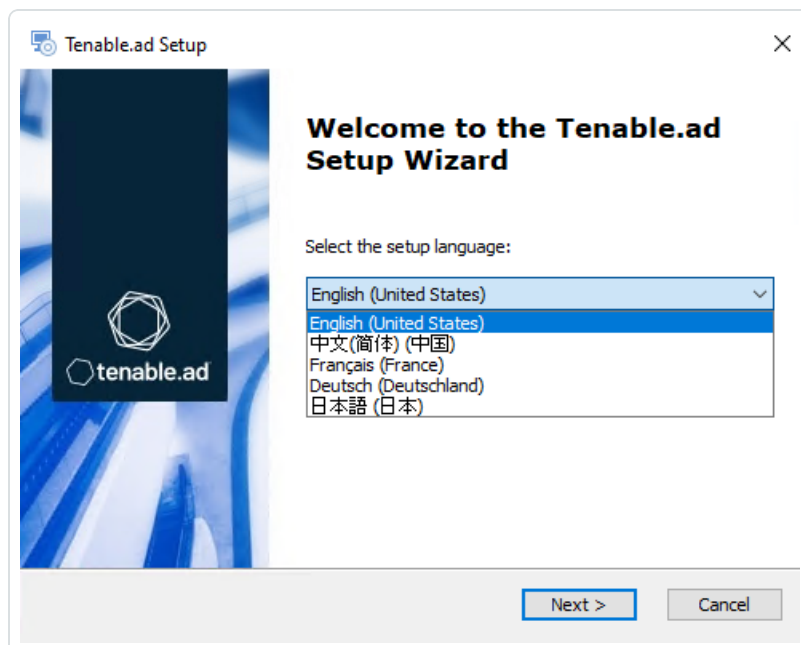



The **Setup Wizard** appears.


3. Select the **Expert Mode** checkbox.

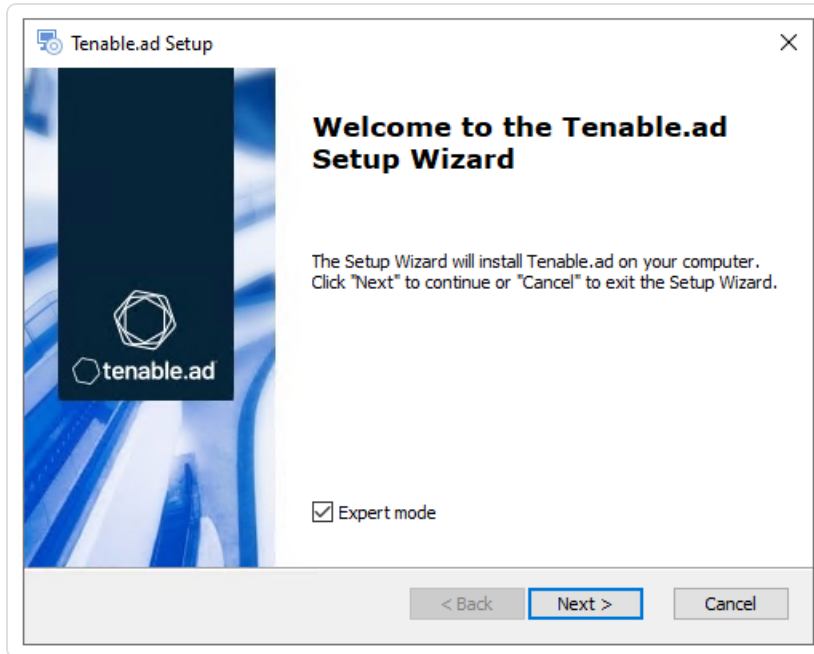

4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Security Engine Nodes* and *Directory Listener* components.

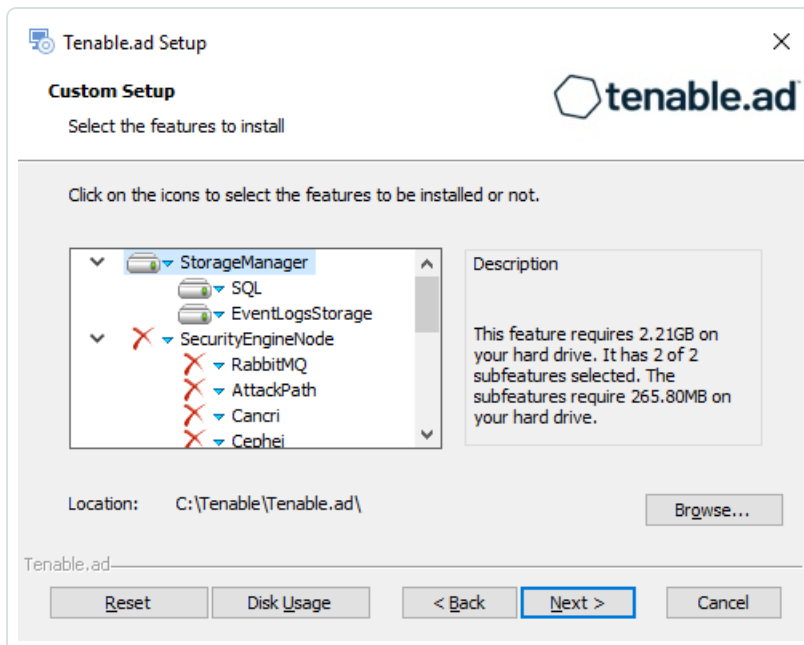




6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with autogenerated and self-signed certificates (Default)** option.

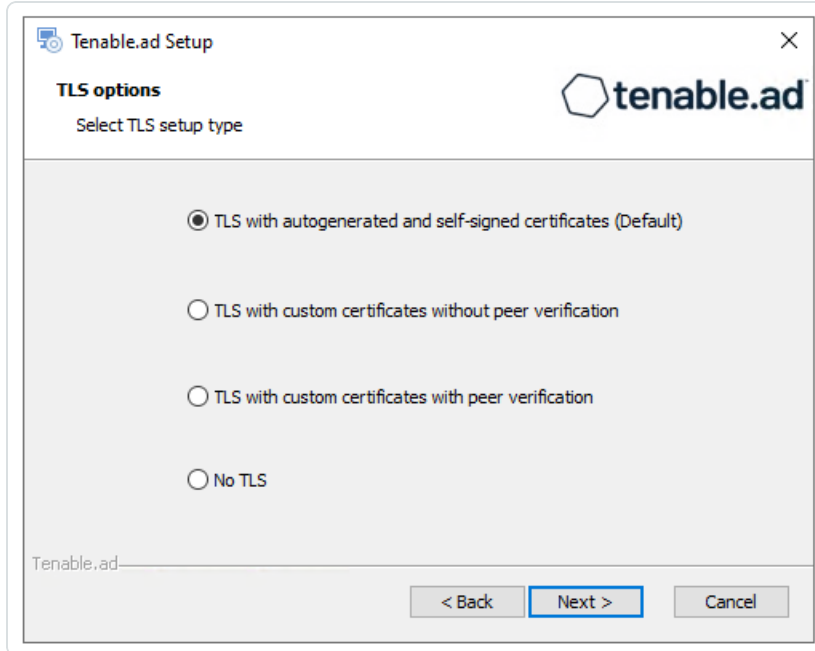

8. Click **Next**.

The **Storage Manager** window appears.

9. In the **Password** box, type a password for the MSSQL database.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL



Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

MSSQL

IP	127.0.0.1
Port	1433
Password	••••••••
Instance Name	TENABLE
SQL UserDB Disk	C:\
SQL UserDB Log Disk	E:\
SQL TempDB Disk	F:\

Event Logs Storage

IP	127.0.0.1
Port	4244

Tenable.ad

< Back Next > Cancel


Note: Tenable strongly recommends that you keep the default TENABLE instance name.

10. Click **Next**.

The **Ready to Install** window appears.



11. Click **Install** to begin the installation.

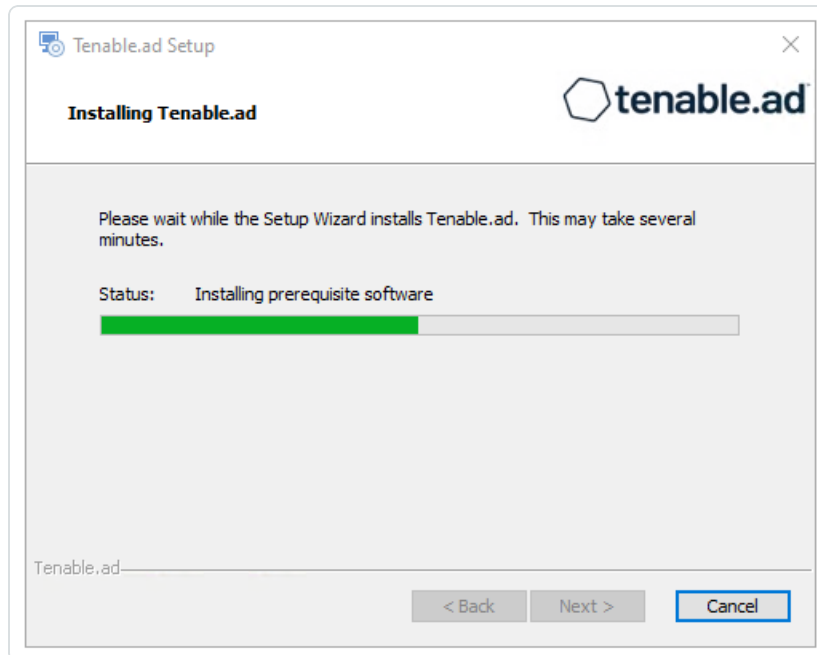

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

12. Click **Finish**.

A dialog box asks you to restart your machine.

13. Click **No**.

Caution: Do not restart the machine now.


14. Install the Security Engine Node.

To install the Security Engine Node with default TLS using the "Expert Mode":

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

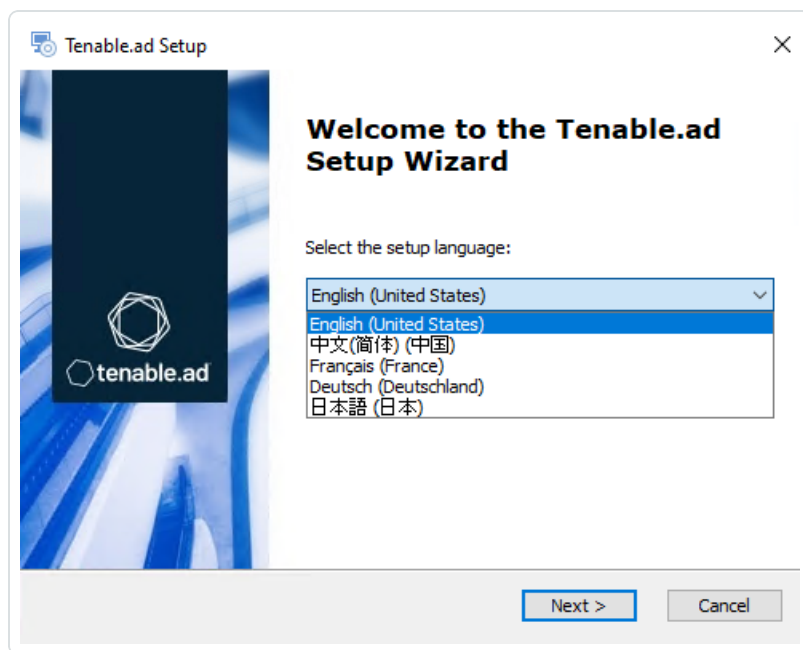

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

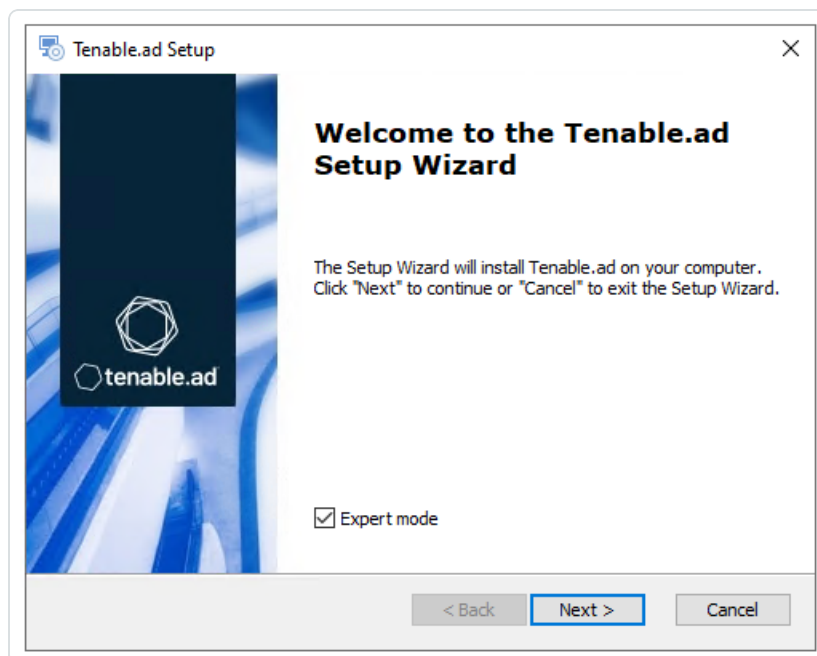


4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Storage Manager* and *Directory Listener* components.


Note: To install SEN services over several machines, see [Split Security Engine Node \(SEN\) Services](#).

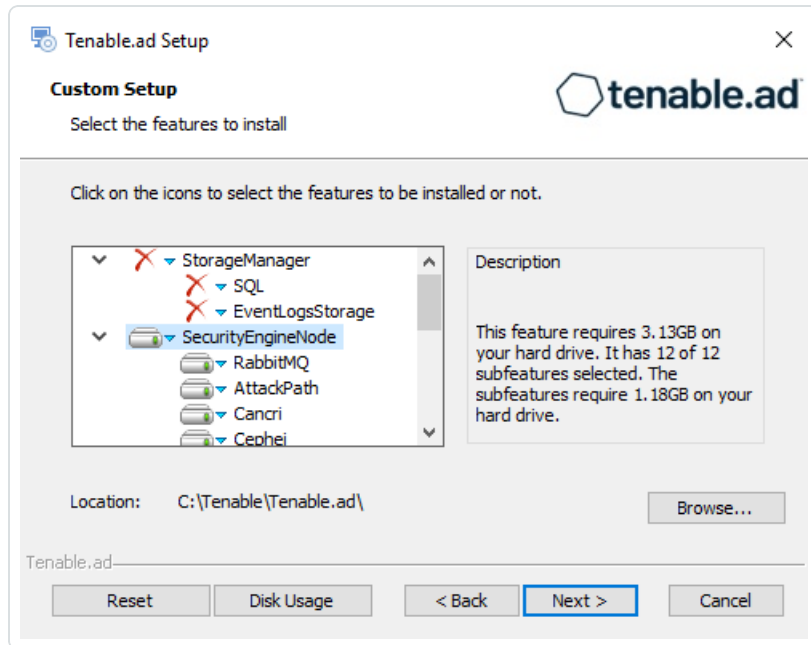

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with autogenerated and self-signed certificates (Default)** option.

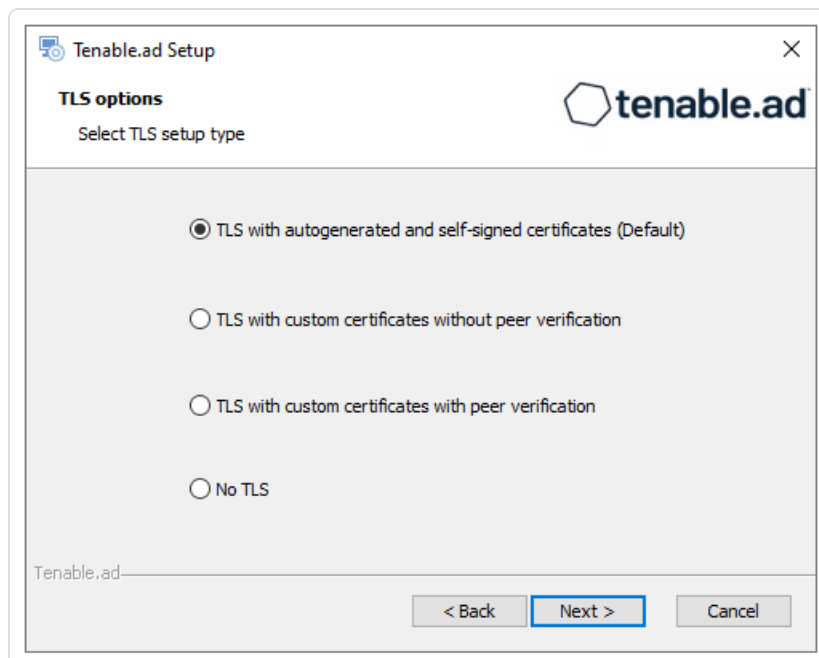

8. Click **Next**.



The **Storage Manager** window appears.

9. Provide the following information:

- In the **MSSQL** and **Event Logs Storage** boxes, type the hostname of the Storage Manager.
- In the **Password** box, type the service account password for the MSSQL database defined in the Storage Manager installation.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL Server.

MSSQL		Event Logs Storage	
IP	10.0.50.101	IP	10.0.50.101
Port	1433	Port	4244
Password	••••••••		
Instance Name	TENABLE		
SQL UserDB Disk	C:\		
SQL UserDB Log Disk	E:\		
SQL TempDB Disk	F:\		

10. Click **Next**.

The **Security Engine Node** window appears.

11. In the **DNS name or IP** box, type the DNS name (preferred) or IP address of the web server that end users enter to access Tenable Identity Exposure.

Tenable.ad Setup ✕

Security Engine Node

Fill in relevant fields

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

Kapteyn DNS name or IP

Tenable.ad

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

12. Click **Next**.

The **Ready to Install** window appears.

13. Click **Install** to begin the installation.

Tenable.ad Setup ✕

Installing Tenable.ad

Please wait while the Setup Wizard installs Tenable.ad. This may take several minutes.

Status: Installing prerequisite software

Tenable.ad



After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **No**.

Caution: Do not restart the machine now.


16. Install the Directory Listener.

To install the Directory Listener with default TLS using the "Expert Mode":

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

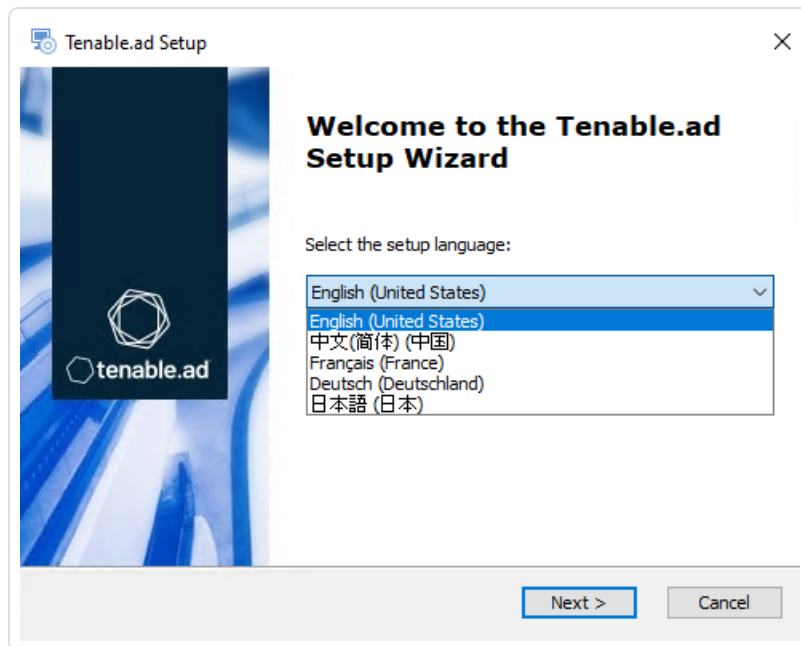

The **Setup Wizard** appears.


3. Select the **Expert Mode** checkbox.

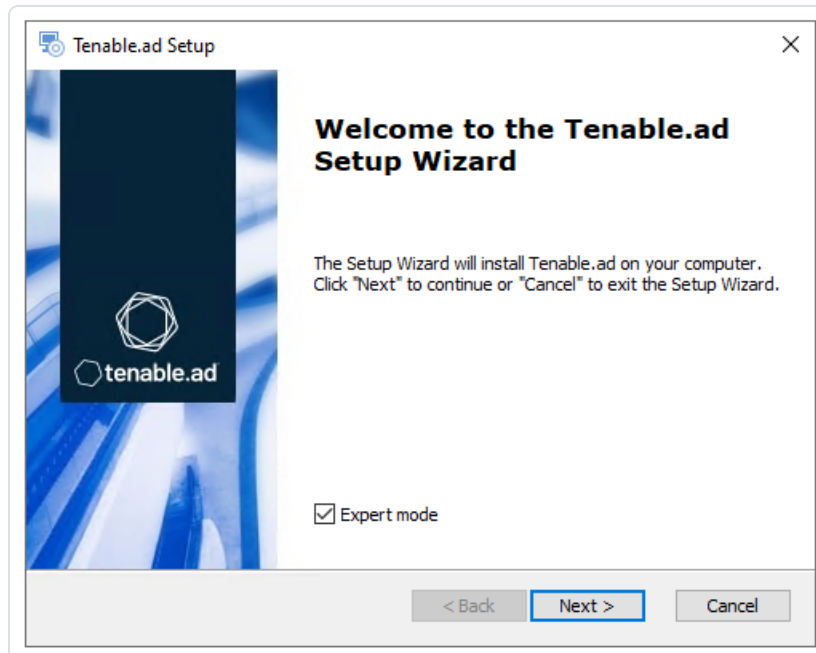

4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Storage Manager* and the *Security Engine Nodes* components.

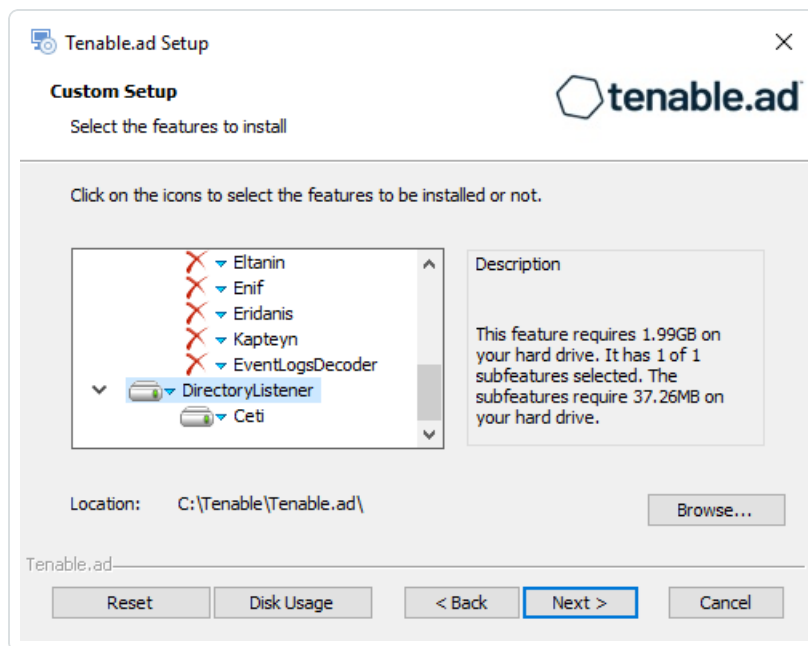


6. Click **Next**.

The **TLS Options** window appears.




7. Select the **TLS with autogenerated and self-signed certificates (Default)** option.

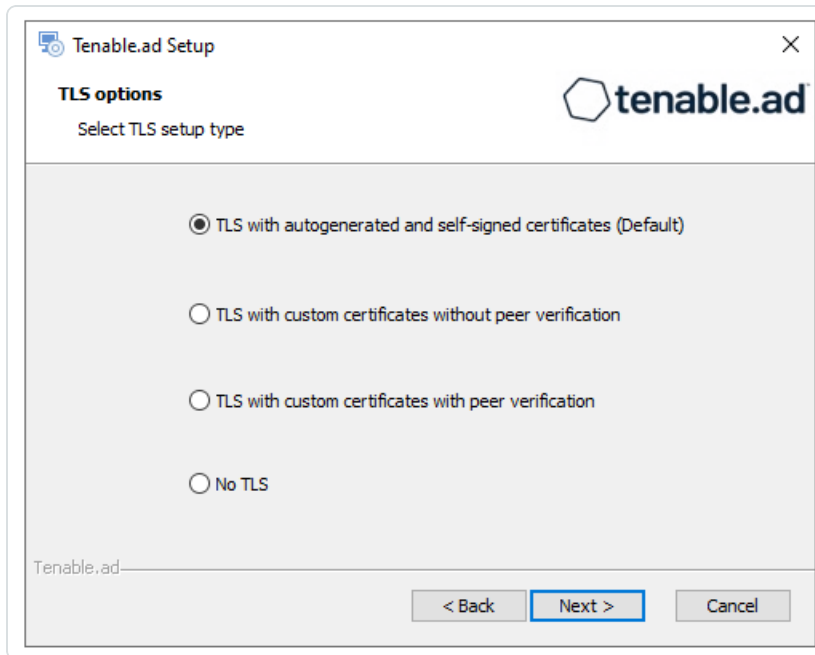

8. Click **Next**.

The **Security Engine Node** window appears.

9. In the **Host** box for RabbitMQ, type the address of the Security Engine Node hosting RabbitMQ.

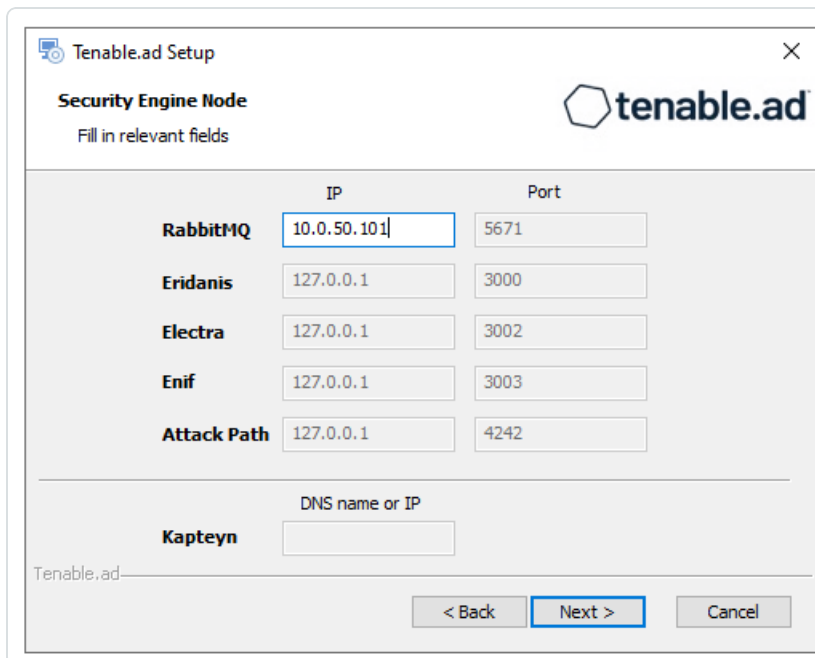




10. Click **Next**.

The **Directory Listener** window appears.


11. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

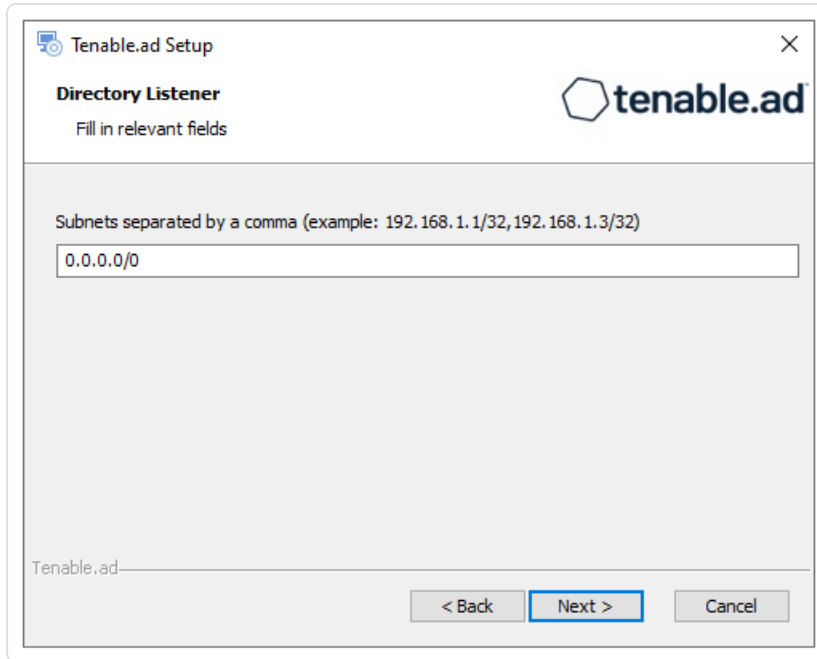

12. Click **Next**.

The **Ready to Install** window appears.

13. Click **Install** to begin the installation.

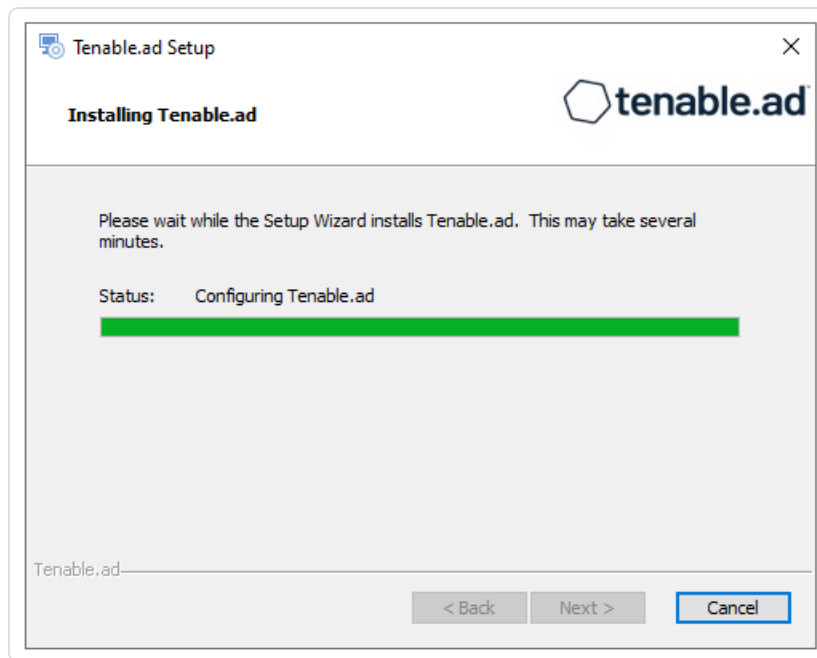

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **Yes**.

The machine restarts.

16. Restart the SEN machine.
17. Restart the Storage Manager machine.

See also

- [HTTPS for Tenable Identity Exposure Web Application](#)

Installation with Custom TLS and without Peer Verification

Required User Role: Administrator on the local machine

This installation type installs the following Tenable Identity Exposure components with custom TLS and without peer verification.



Order of installation


Install the components in the following order:

1. [Storage Manager](#)
2. [Security Engine Node](#)
3. [Directory Listener](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.


To install the Storage Manager with custom TLS and without peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.
A welcome screen appears.
2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

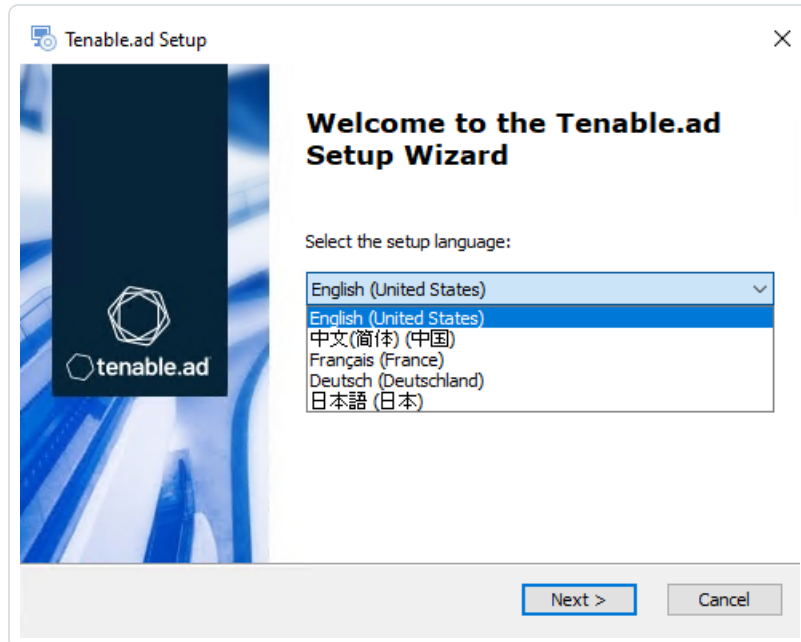

The **Setup Wizard** appears.


3. Select the **Expert Mode** checkbox.

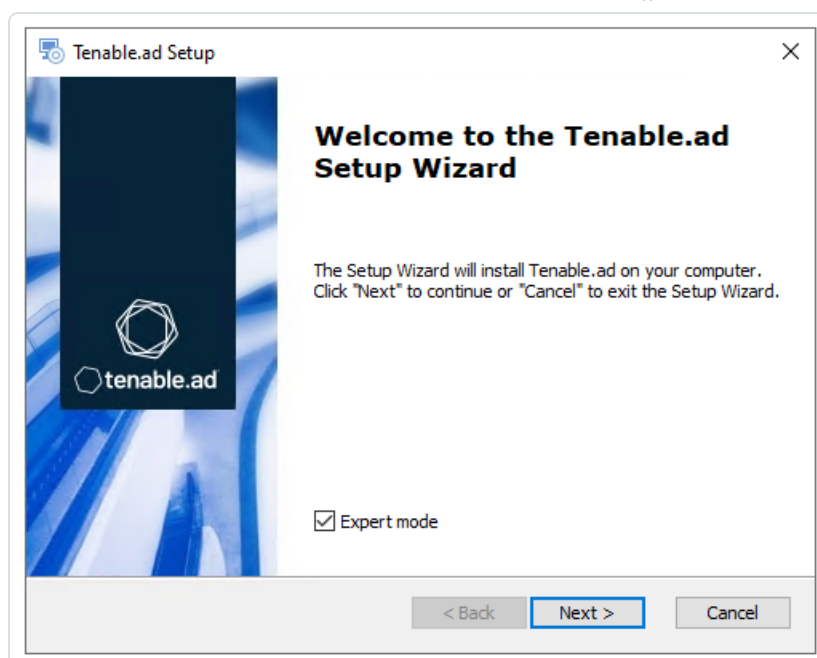

4. Click **Next**.

The **Custom Setup** window appears.


5. Deselect the *Security Engine Nodes* and *Directory Listener* components.

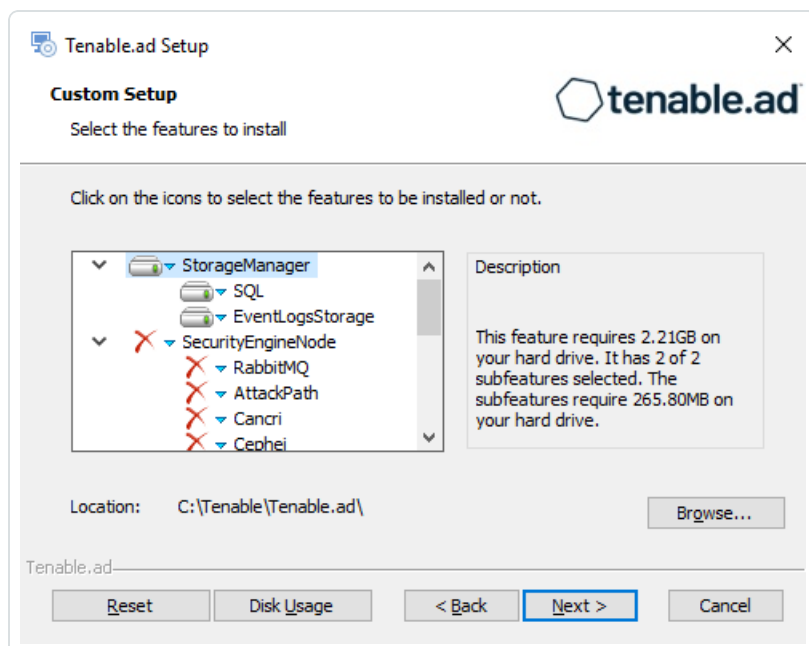

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with custom certificates without peer verification** option.

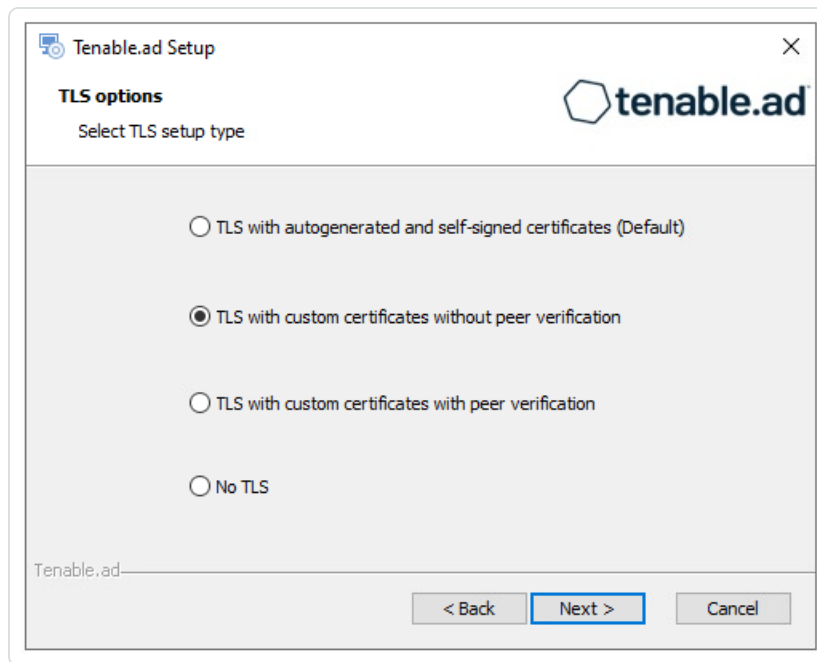

8. Click **Next**.


The **TLS certificates** window appears.

9. Provide the following information:

- In the **Server PFX Archive** box, click ... to browse to your PFX archive.
- In the **PFX Password** box, type the password for the PFX file.



- In the **CA Cert File** box, click ... to browse to your CA certificate file.

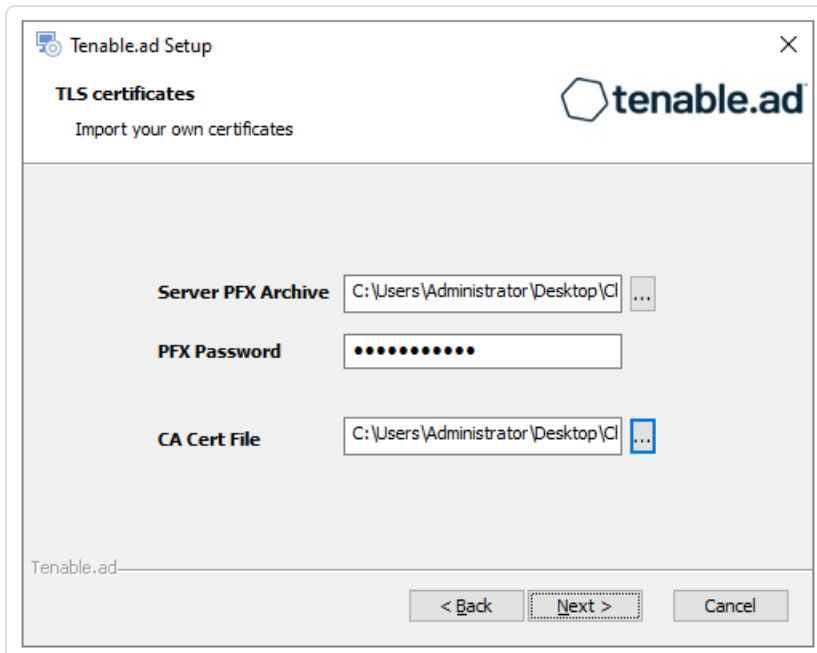

10. Click **Next**.

The **Storage Manager** window appears.

11. In the **Password** box, type a password for the MSSQL database.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL



Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

MSSQL

IP	127.0.0.1
Port	1433
Password	••••••••
Instance Name	TENABLE
SQL UserDB Disk	C:\
SQL UserDB Log Disk	E:\
SQL TempDB Disk	F:\

Event Logs Storage

IP	127.0.0.1
Port	4244

Tenable.ad

< Back Next > Cancel


Note: Tenable strongly recommends that you keep the default TENABLE instance name.

12. Click **Next**.

The **Ready to Install** window appears.



13. Click **Install** to begin the installation.

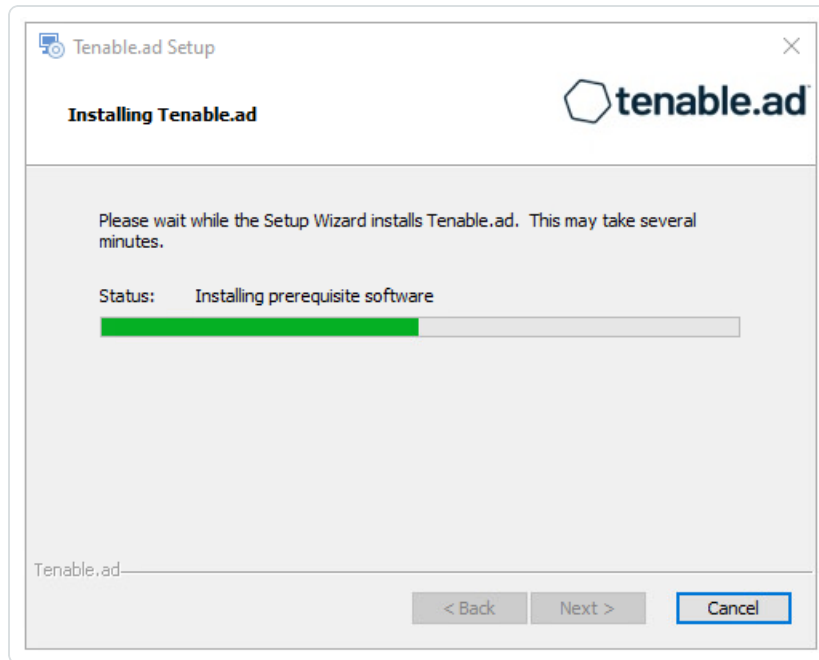

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **No**.

Caution: Do not restart the machine now.


16. Install the Security Engine Node.

To install the Security Engine Node with custom TLS and without peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

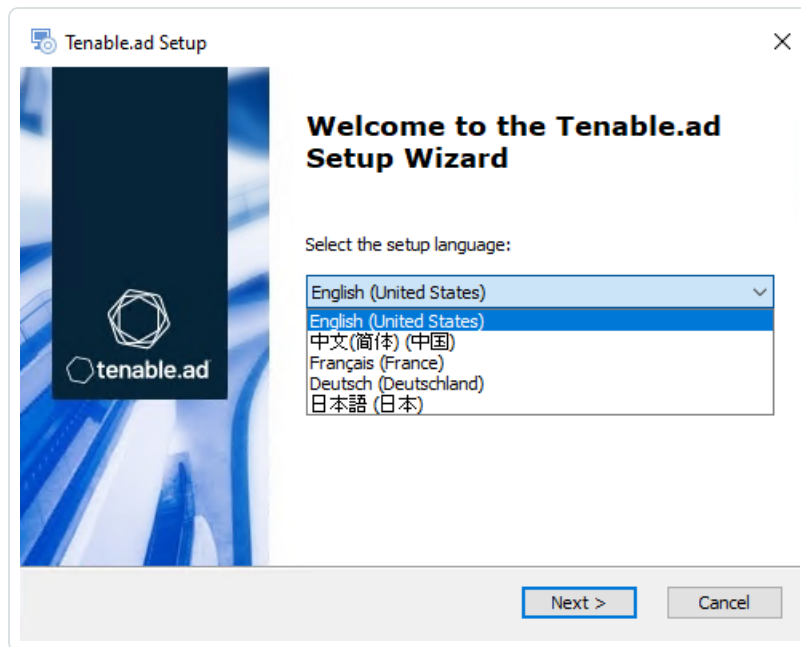

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

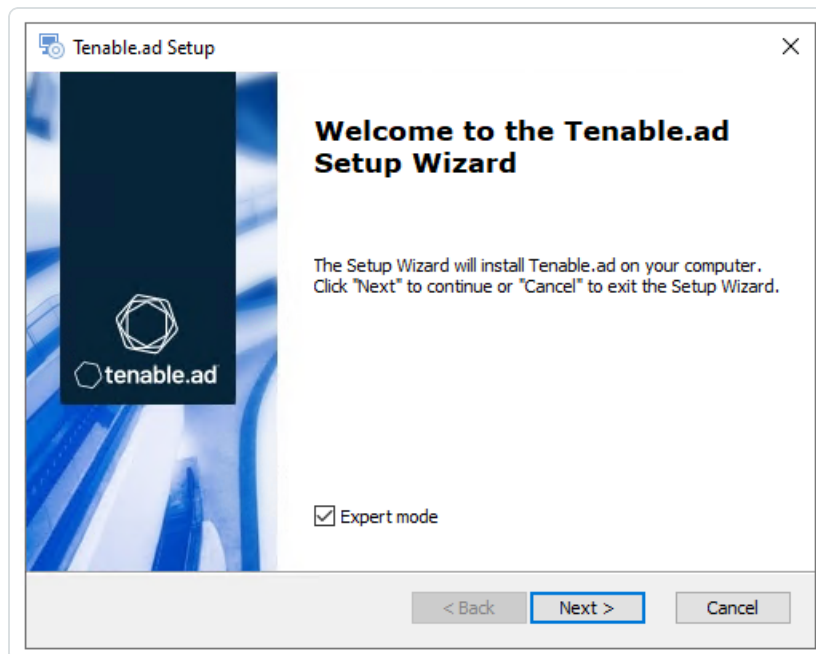


4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Storage Manager* and *Directory Listener* components.


Note: To install SEN services over several machines, see [Split Security Engine Node \(SEN\) Services](#).

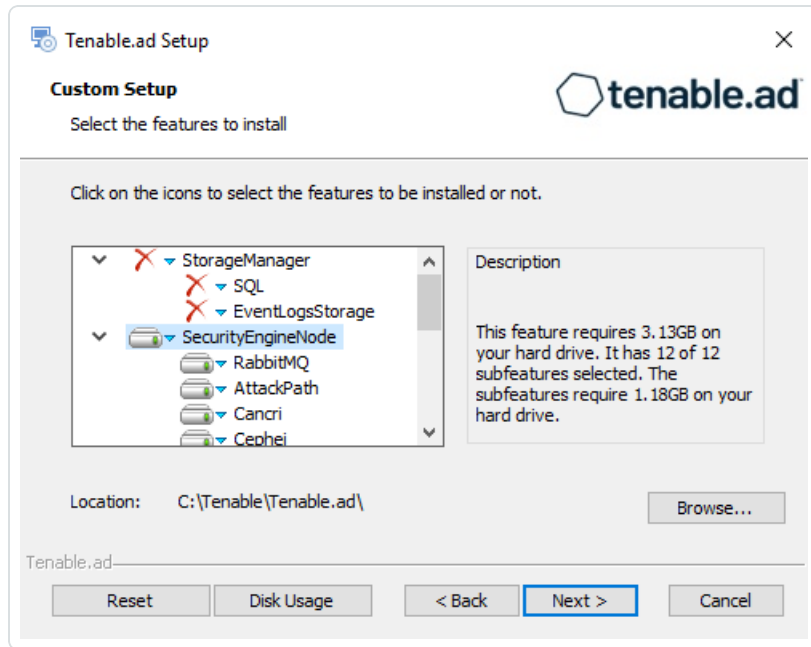

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with custom certificates without peer verification** option.

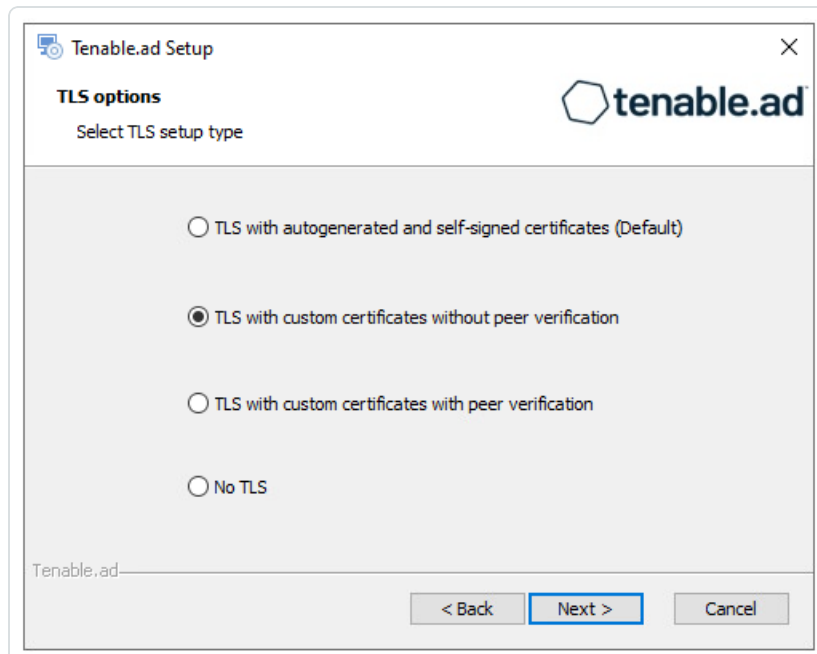


8. Click **Next**.



The **TLS certificates** window appears.

9. Provide the following information:
 - In the **Server PFX Archive** box, click ... to browse to your PFX archive.
 - In the **PFX Password** box, type the password for the PFX file.
 - In the **CA Cert File** box, click ... to browse to your CA certificate file.

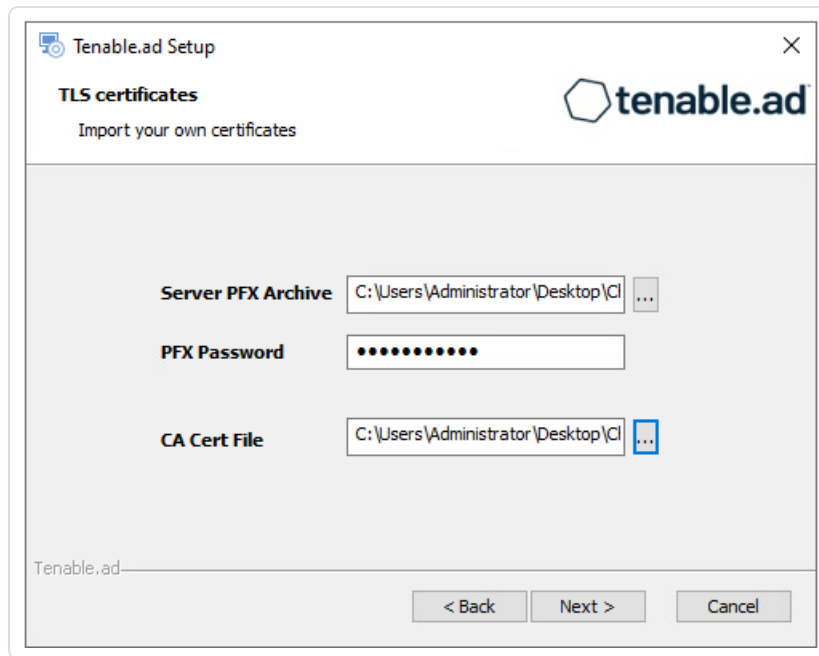

10. Click **Next**.

The **Storage Manager** window appears.

11. Provide the following information:
 - In the **MSSQL** and the **Event Logs Storage** boxes, type the hostname of the Storage Manager.
 - In the **Password** box, type the service account password for the MSSQL database defined in the Storage Manager installation.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the

SQL Server.

MSSQL		Event Logs Storage	
IP	10.0.50.101	IP	10.0.50.101
Port	1433	Port	4244
Password	••••••••		
Instance Name	TENABLE		
SQL UserDB Disk	C:\		
SQL UserDB Log Disk	E:\		
SQL TempDB Disk	F:\		

12. Click **Next**.

The **Security Engine Node** window appears.

13. In the **DNS name or IP** box, type the DNS name (preferred) or IP address of the web server that end users enter to access Tenable.ad.

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

Kapteyn DNS name or IP: 10.0.50.110




Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

14. Click **Next**.

The **Ready to Install** window appears.

15. Click **Install** to begin the installation.

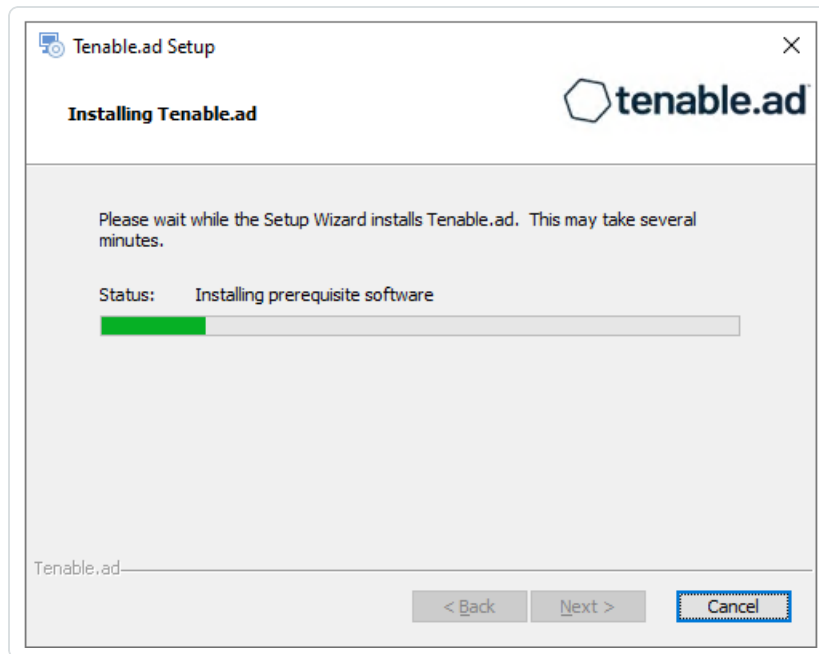

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

16. Click **Finish**.

A dialog box asks you to restart your machine.

17. Click **No**.

Caution: Do not restart the machine now.

18. Install the Directory Listener.


To install the Directory Listener with custom TLS and without peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.




2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

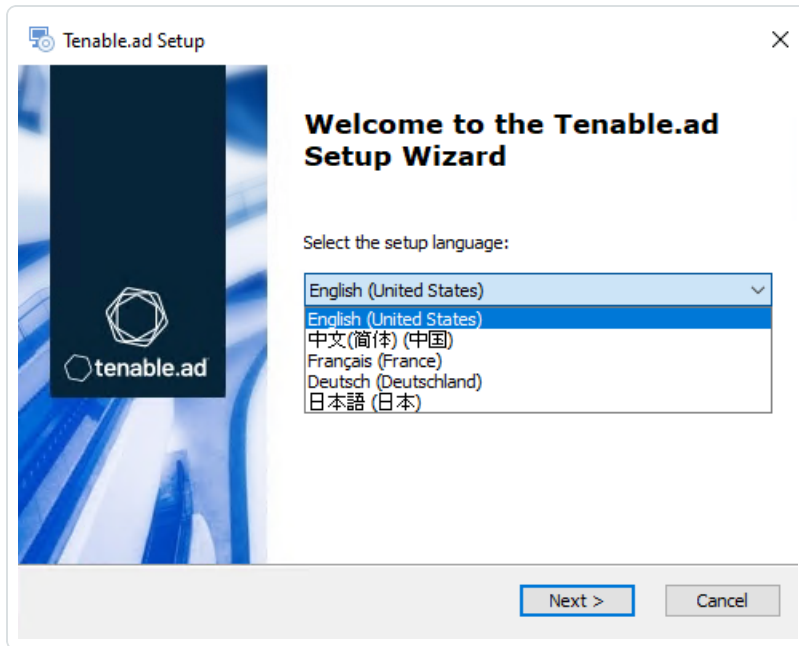

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

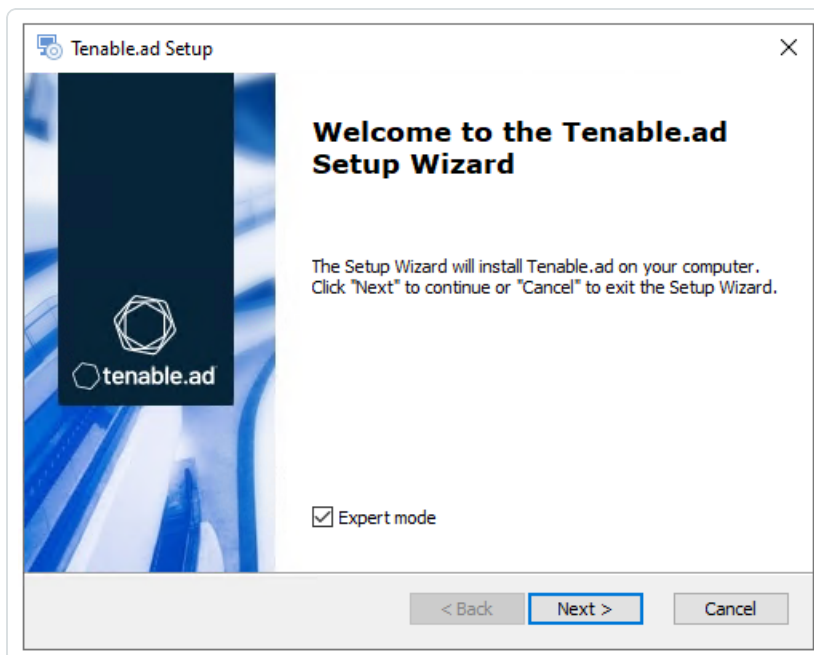


4. Click **Next**.

The **Custom Setup** window appears.




5. Deselect the *Storage Manager* and the *Security Engine Nodes* components.

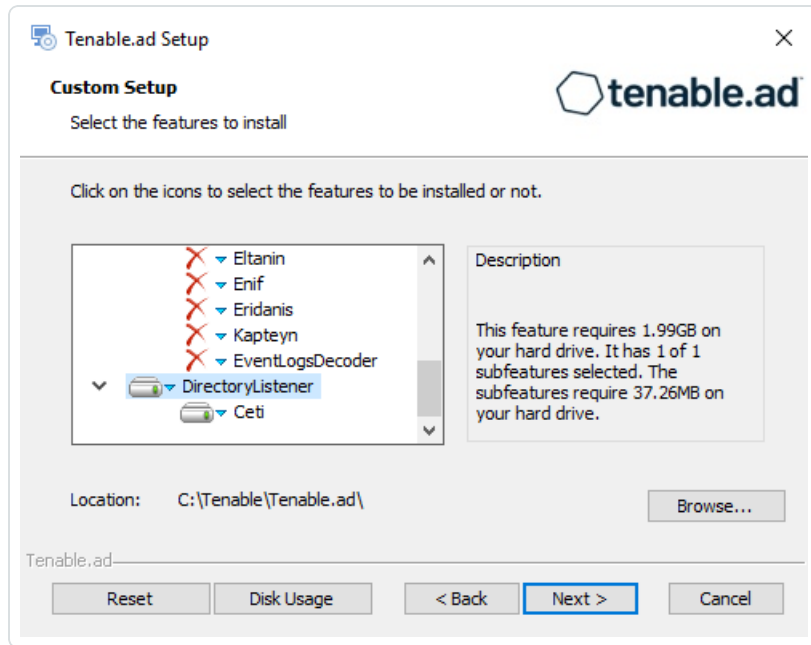

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with custom certificates without peer verification** option.

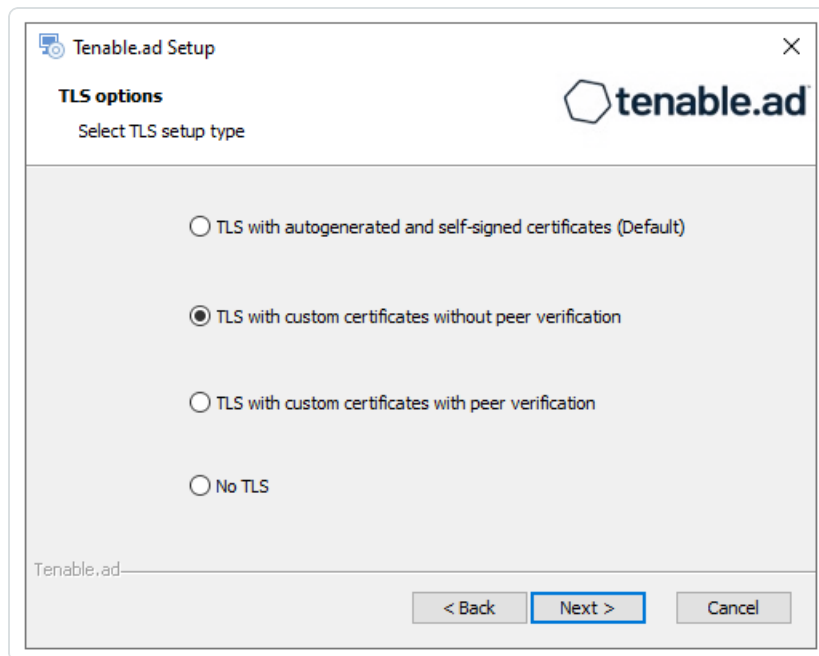



8. Click **Next**.

The **TLS certificates** window appears.

Tenable.ad Setup

TLS certificates
Import your own certificates

tenable.ad

Server PFX Archive ...

PFX Password

CA Cert File ...

Tenable.ad

< Back Next > Cancel

9. Nothing is required in this screen. Click **Next**.

The **Security Engine Node** window appears.

10. In the **Host** box for RabbitMQ, type the address of the Security Engine Node hosting RabbitMQ.

Tenable.ad Setup

Security Engine Node
Fill in relevant fields

tenable.ad

	IP	Port
RabbitMQ	<input type="text" value="172.26.112.73"/>	<input type="text" value="5671"/>
Eridanis	<input type="text" value="127.0.0.1"/>	<input type="text" value="3000"/>
Electra	<input type="text" value="127.0.0.1"/>	<input type="text" value="3002"/>
Enif	<input type="text" value="127.0.0.1"/>	<input type="text" value="3003"/>
Attack Path	<input type="text" value="127.0.0.1"/>	<input type="text" value="4242"/>

DNS name or IP

Kapteyn

Tenable.ad


< Back Next > Cancel



11. Click **Next**.

The **Directory Listener** window appears.


12. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

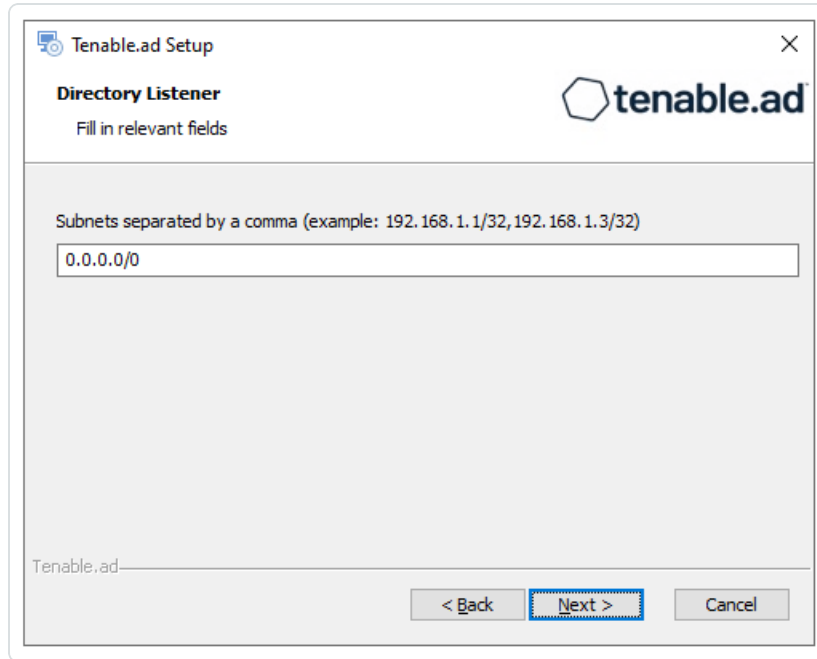

13. Click **Next**.

The **Ready to Install** window appears.

14. Click **Install** to begin the installation.

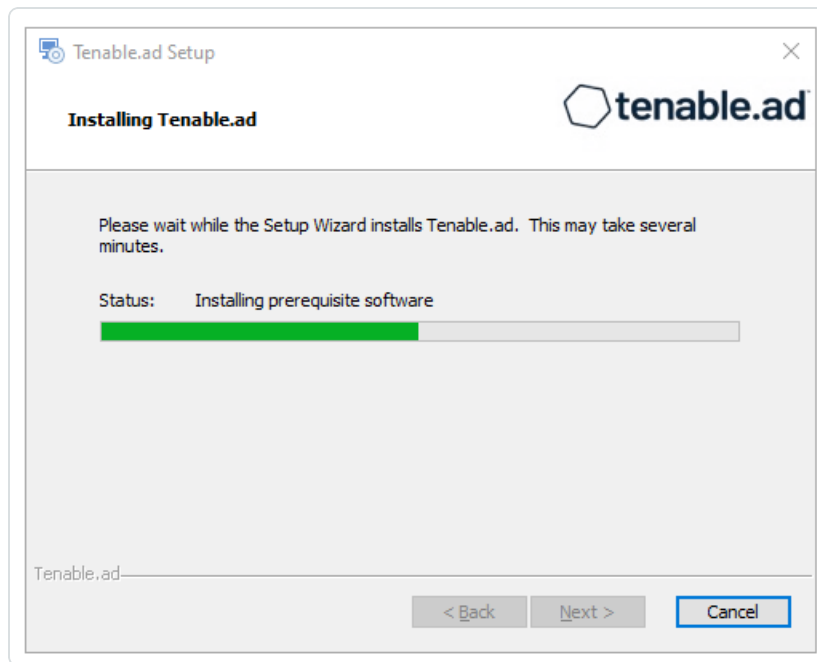

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

15. Click **Finish**.

A dialog box asks you to restart your machine.

16. Click **Yes**.

The machine restarts.

17. Restart the SEN machine.

18. Restart the Storage Manager machine.


Installation with Custom TLS and with Peer Verification

Required User Role: Administrator on the local machine

This installation type installs the following Tenable Identity Exposure components with custom TLS and peer verification.

Public Key Infrastructure (PKI) Certificate

To use peer verification, your PKI certificate must include the IP addresses or DNS of all the machines used to install Tenable Identity Exposure.

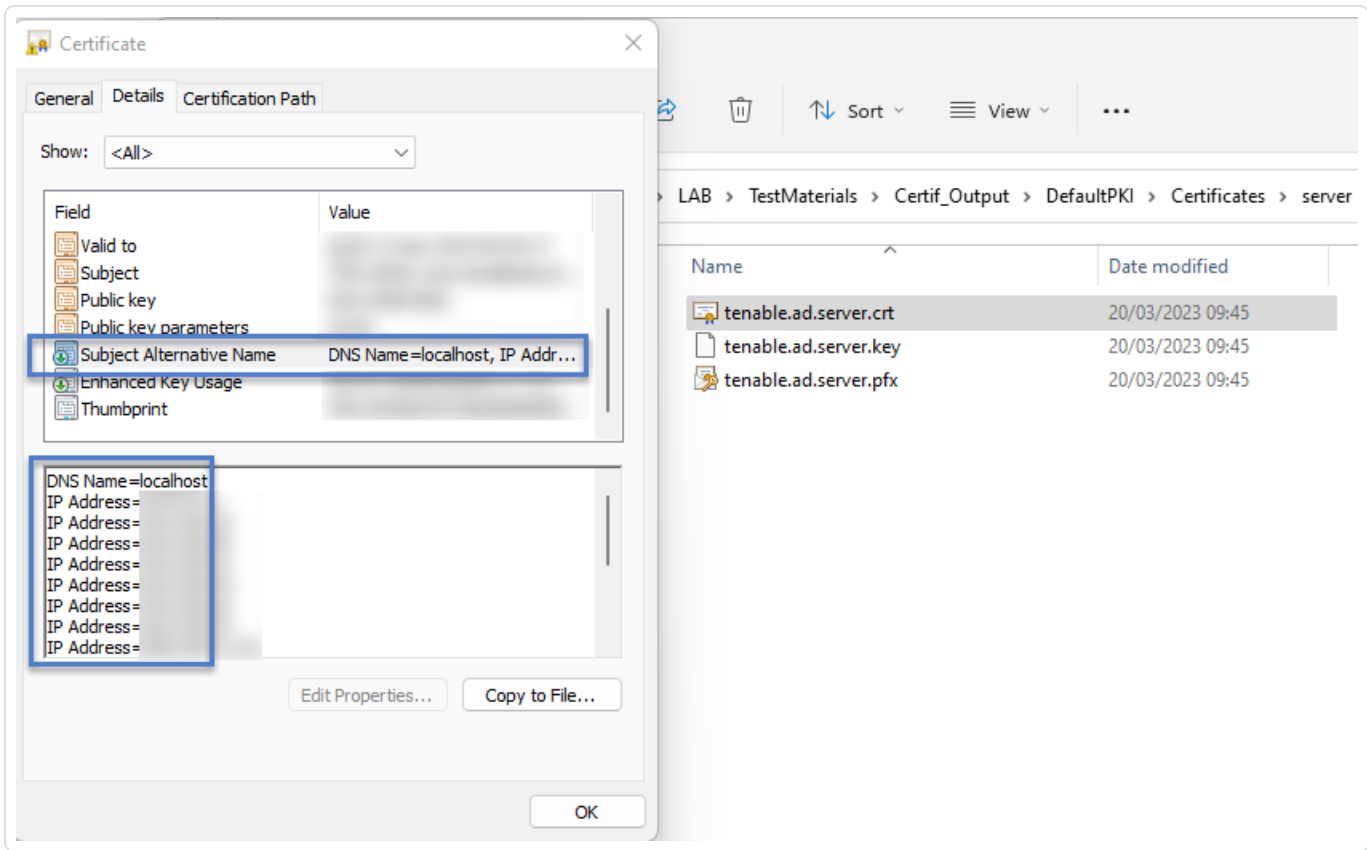

Order of installation


Install the components in the following order:

1. [Storage Manager](#)
2. [Security Engine Node](#)
3. [Directory Listener](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.


To install the Storage Manager with custom TLS and peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.
A welcome screen appears.
2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

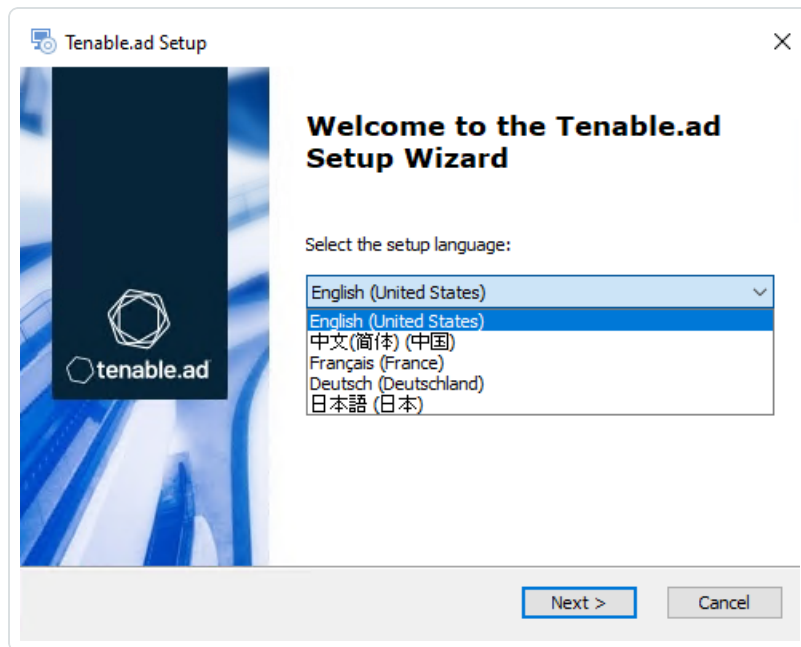

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

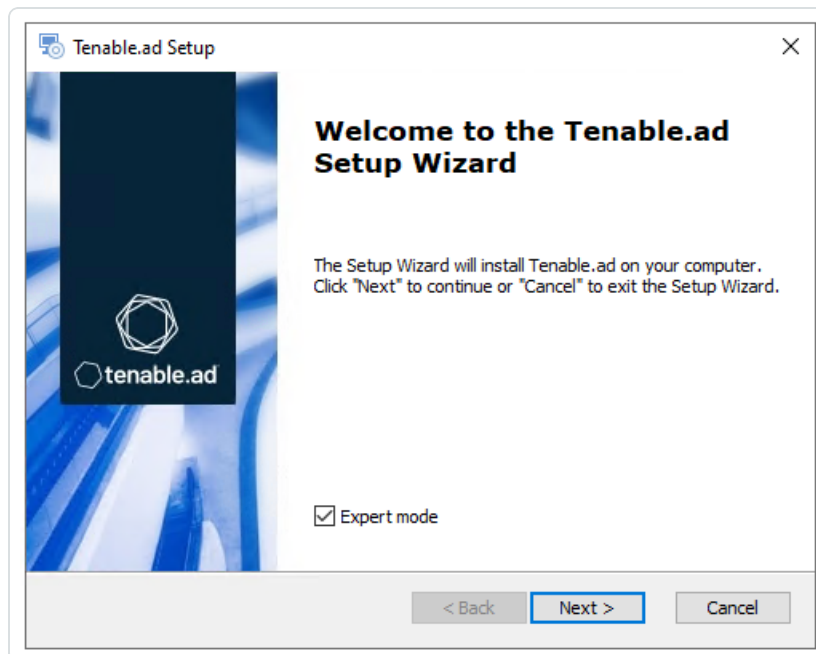


4. Click **Next**.

The **Custom Setup** window appears.




5. Deselect the *Security Engine Nodes* and *Directory Listener* components.

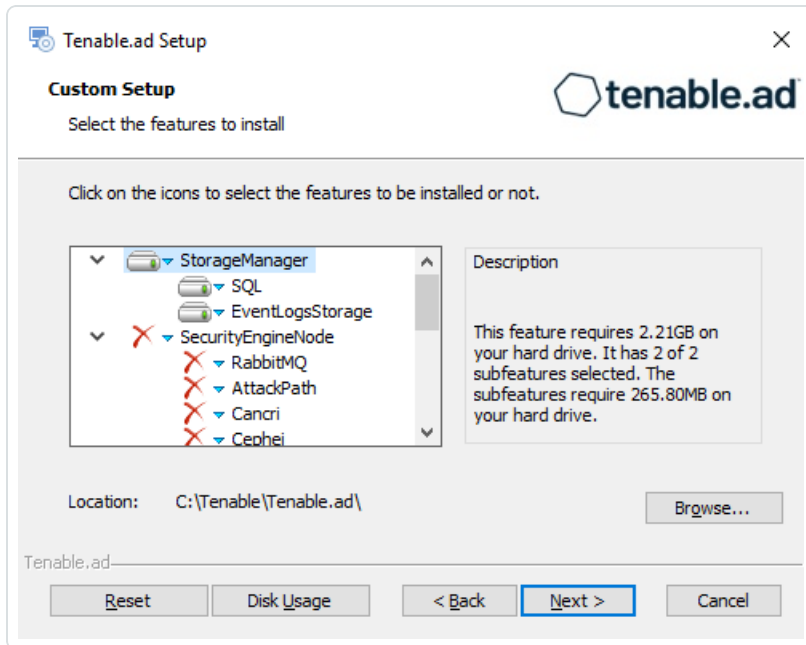

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with custom certificates with peer validation** option.

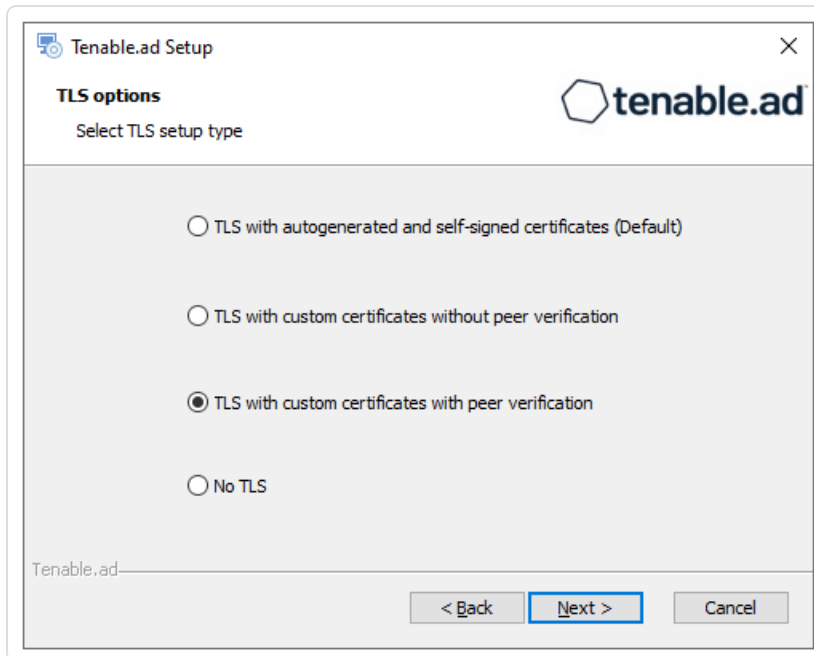


8. Click **Next**.

The **TLS certificates** window appears.



9. Provide the following information:

- In the **Server PFX Archive** box, click ... to browse to your PFX archive.
- In the **PFX Password** box, type the password for the PFX file.
- In the **CA Cert File** box, click ... to browse to your CA certificate file.

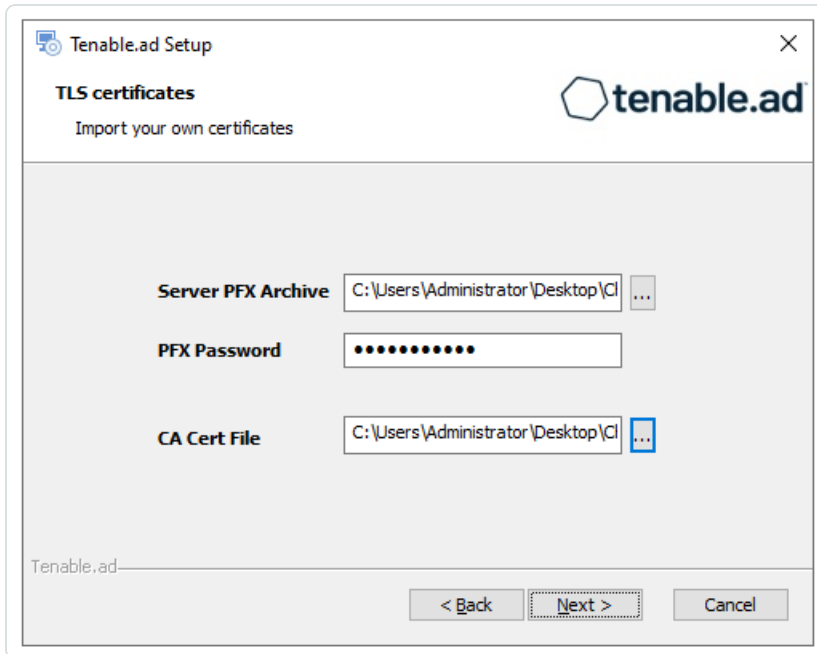

10. Click **Next**.

The **Storage Manager** window appears.

11. In the **Password** box, type a password for the MSSQL database.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL



Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

MSSQL

IP	127.0.0.1
Port	1433
Password	••••••••
Instance Name	TENABLE
SQL UserDB Disk	C:\
SQL UserDB Log Disk	E:\
SQL TempDB Disk	F:\

Event Logs Storage

IP	127.0.0.1
Port	4244

Tenable.ad

< Back Next > Cancel


Note: Tenable strongly recommends that you keep the default TENABLE instance name.

12. Click **Next**.

The **Ready to Install** window appears.



13. Click **Install** to begin the installation.

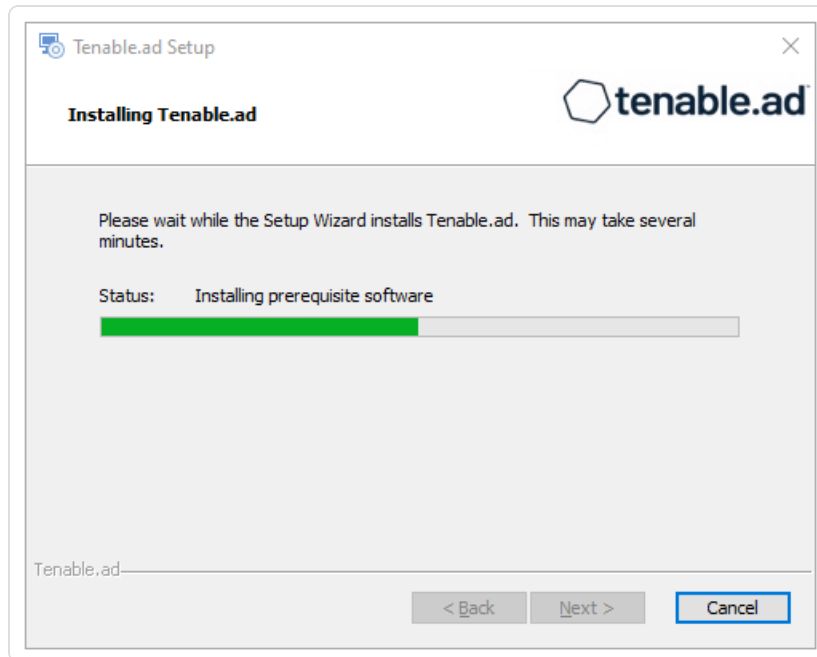

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **No**.

Caution: Do not restart the machine now.


16. Install the Security Engine Node.

To install the Security Engine Node with custom TLS and peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

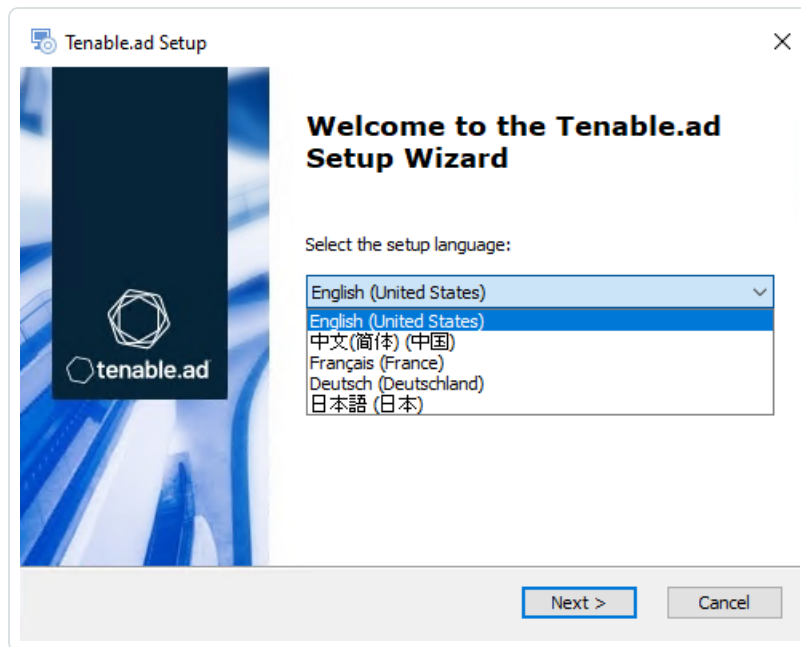

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

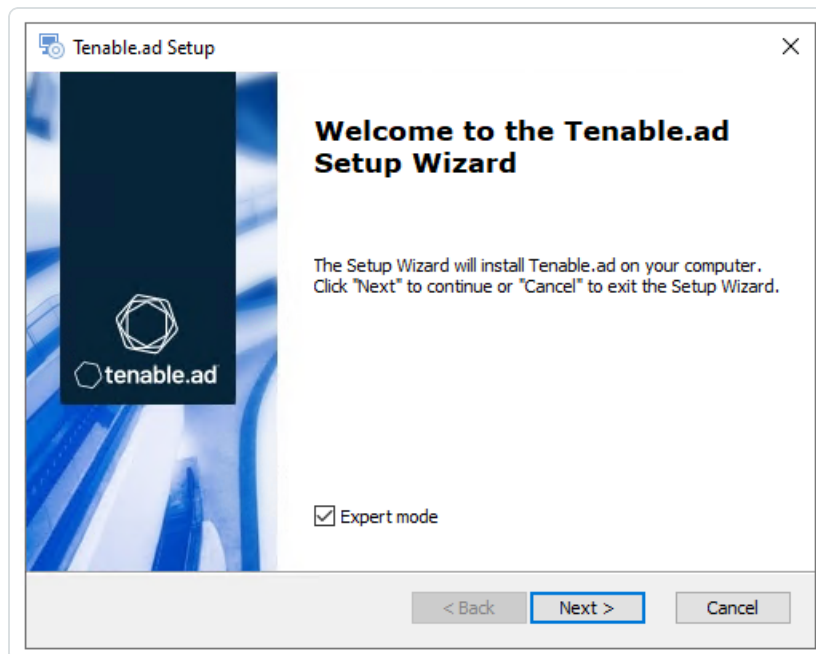


4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Storage Manager* and *Directory Listener* components.


Note: To install SEN services over several machines, see [Split Security Engine Node \(SEN\) Services](#).

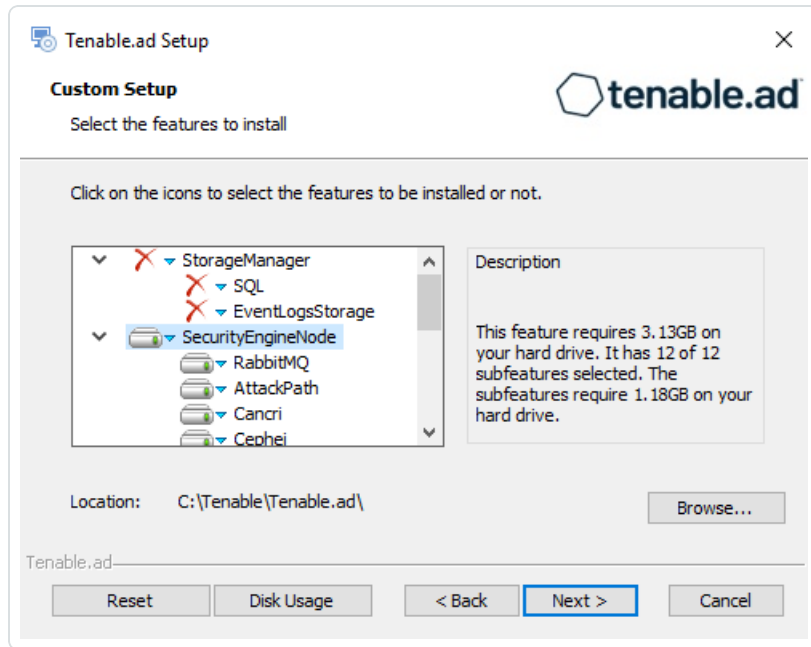

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **TLS with custom certificates with peer validation** option.

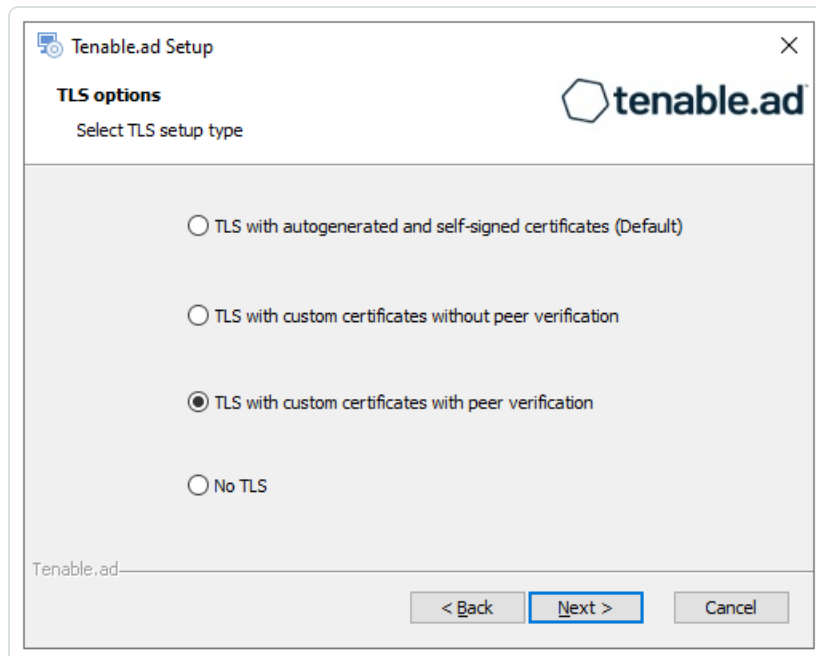


8. Click **Next**.



The **TLS certificates** window appears.

9. Provide the following information:
 - In the **Server PFX Archive** box, click ... to browse to your PFX archive.
 - In the **PFX Password** box, type the password for the PFX file.
 - In the **CA Cert File** box, click ... to browse to your CA certificate file.

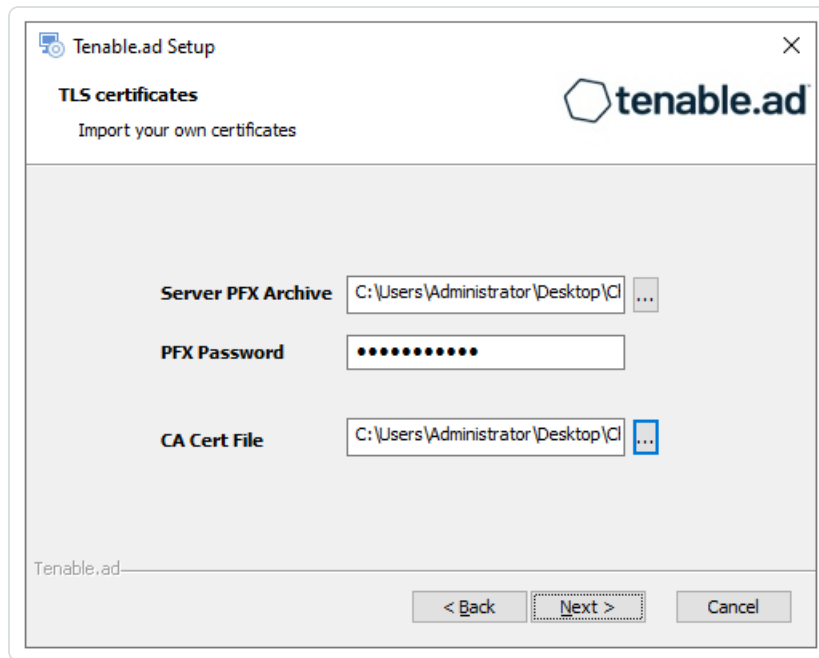

10. Click **Next**.

The **Storage Manager** window appears.

11. Provide the following information:
 - In the **MSSQL** and **Event Logs Storage** boxes, type the hostname of the Storage Manager.
 - In the **Password** box, type the service account password for the MSSQL database defined in the Storage Manager installation.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

MSSQL

IP: 10.0.50.101
 Port: 1433
 Password: ●●●●●●
 Instance Name: TENABLE
 SQL UserDB Disk: C:\
 SQL UserDB Log Disk: E:\
 SQL TempDB Disk: F:\

Event Logs Storage

IP: 10.0.50.101
 Port: 4244

Tenable.ad

< Back Next > Cancel

12. Click **Next**.

The **Security Engine Node** window appears.

13. In the **DNS name or IP** box, type the DNS name (preferred) or IP address of the web server that end users enter to access Tenable Identity Exposure.

Tenable.ad Setup

Security Engine Node
Fill in relevant fields

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

DNS name or IP

Kapteyn 172.26.112.73

Tenable.ad

< Back Next > Cancel


Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).



14. Click **Next**.

The **Ready to Install** window appears.

15. Click **Install** to begin the installation.

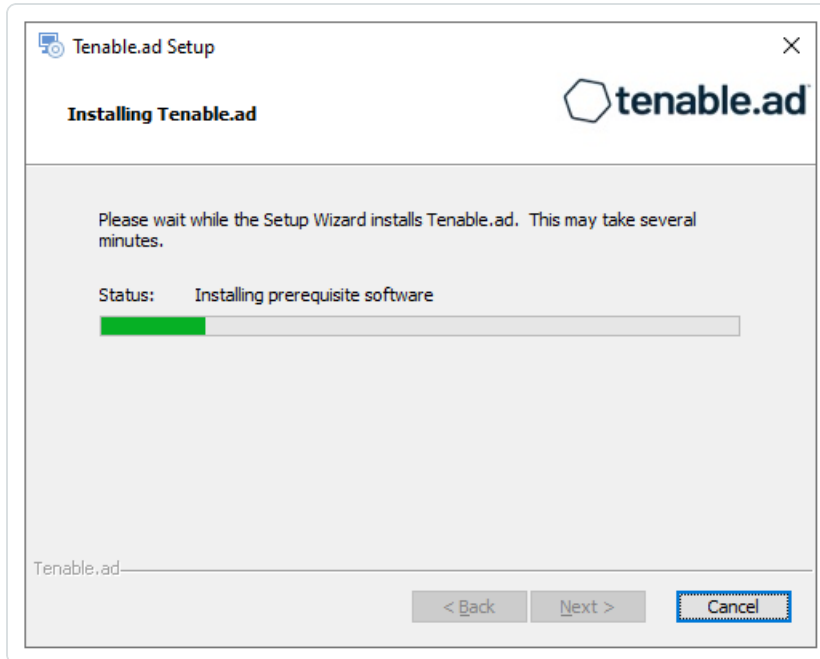

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

16. Click **Finish**.

A dialog box asks you to restart your machine.

17. Click **No**.

Caution: Do not restart the machine now.


18. Install the Directory Listener.

To install the Directory Listener with custom TLS and peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

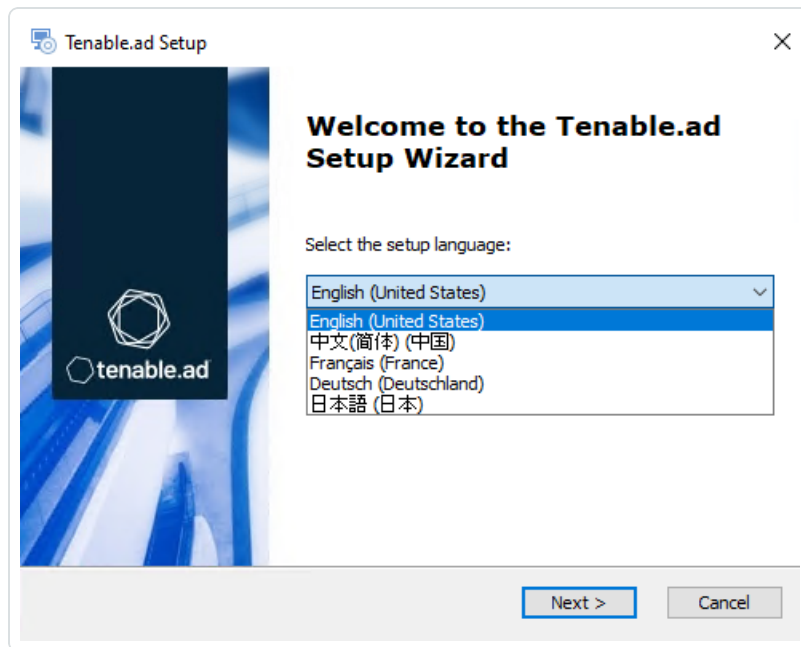

The **Setup Wizard** appears.


3. Select the **Expert Mode** checkbox.

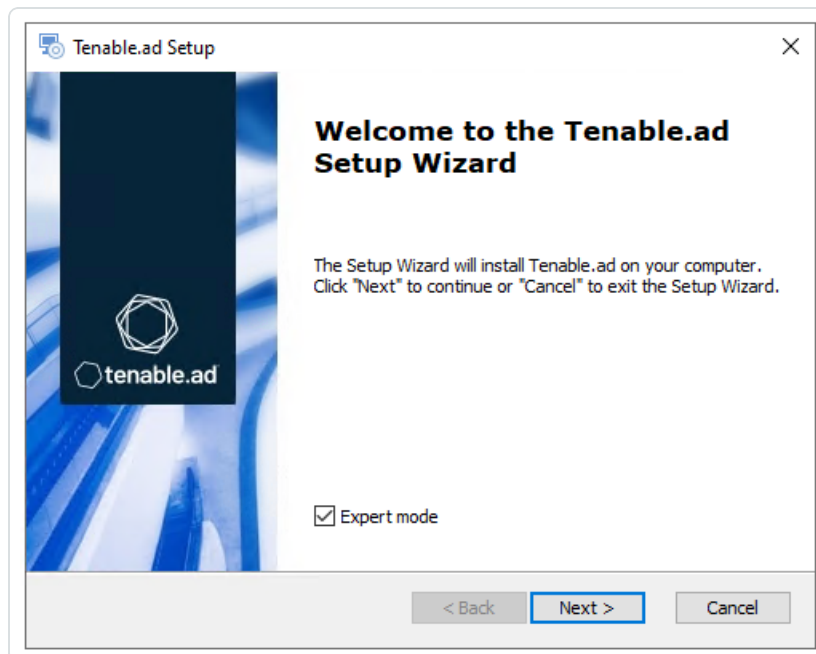

4. Click **Next**.

The **Custom Setup** window appears.


5. Deselect the *Storage Manager* and the *Security Engine Nodes* components.

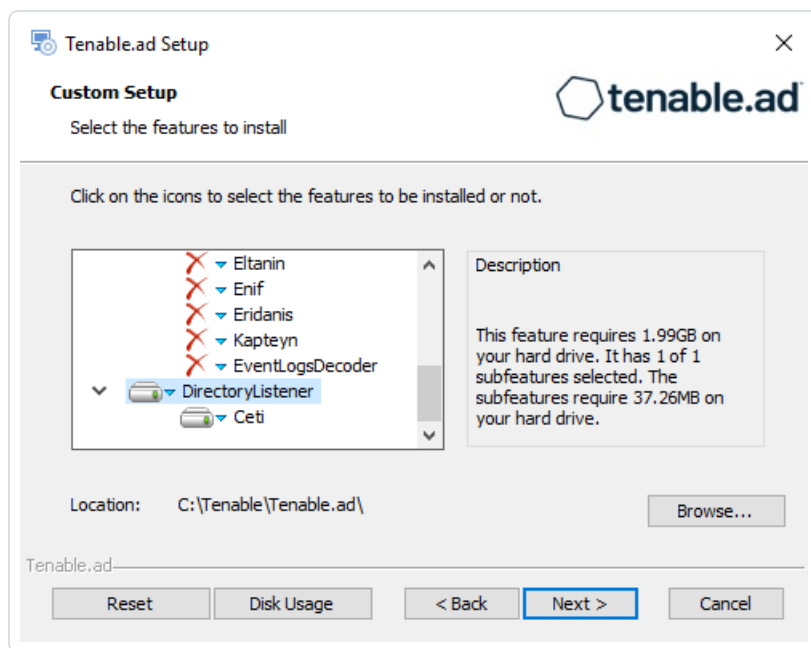

6. Click **Next**.

The **TLS Options** window appears.


7. Select the **TLS with custom certificates with peer validation** option.

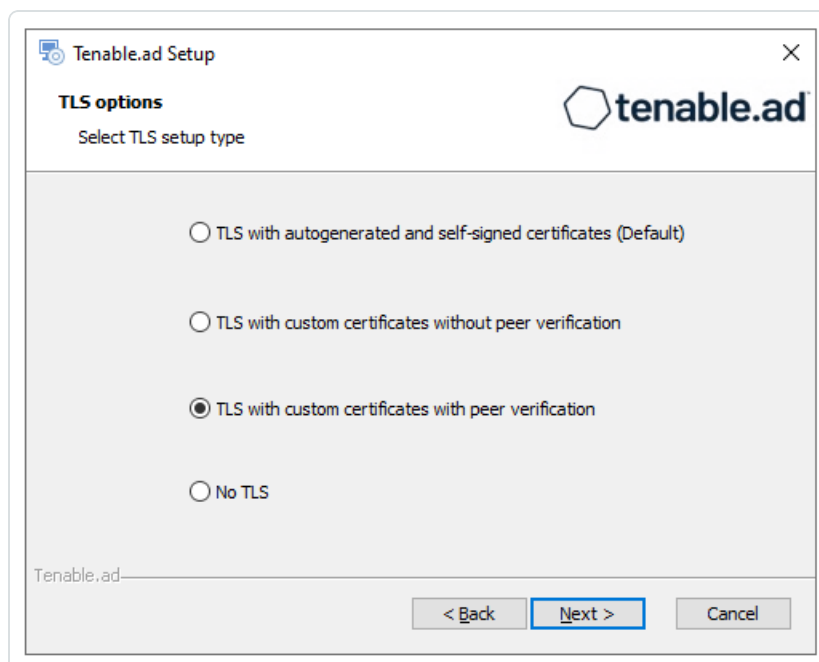


8. Click **Next**.

The **TLS certificates** window appears.

9. In the **CA Cert File** box, click ... to browse to your CA certificate file.

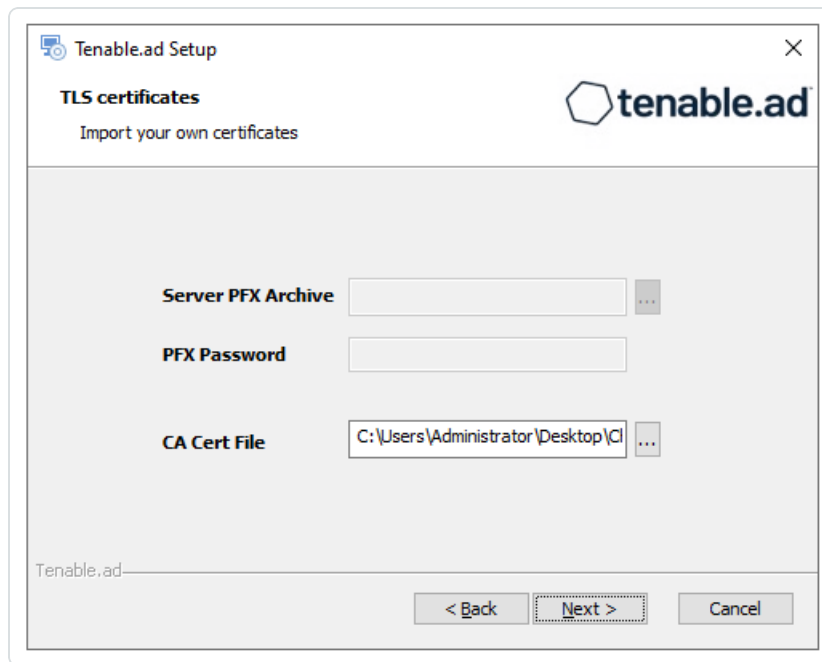

10. Click **Next**.
11. The **Security Engine Node** window appears.
12. In the **Host** box for RabbitMQ, type the address of the Security Engine Node hosting RabbitMQ.

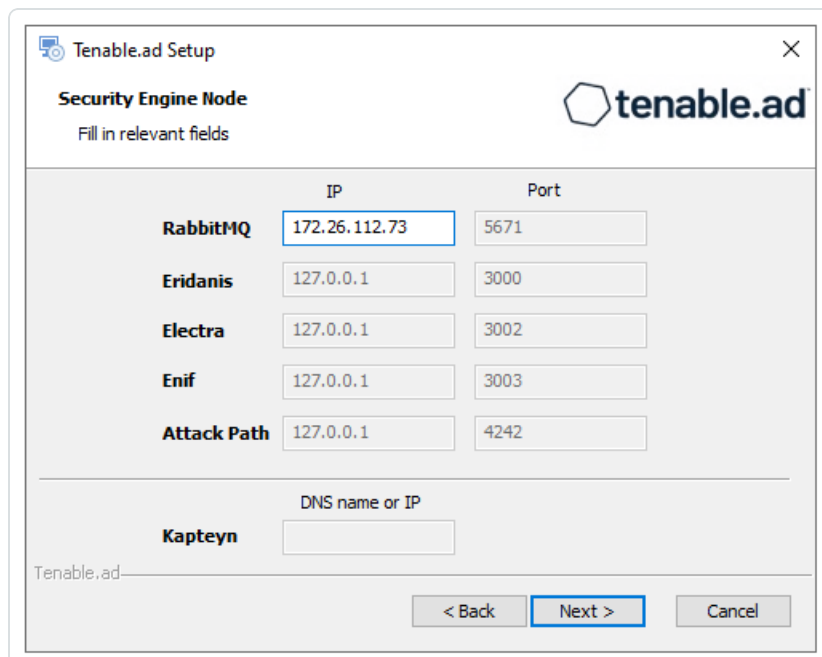


13. Click **Next**.

The **Directory Listener** window appears.




14. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

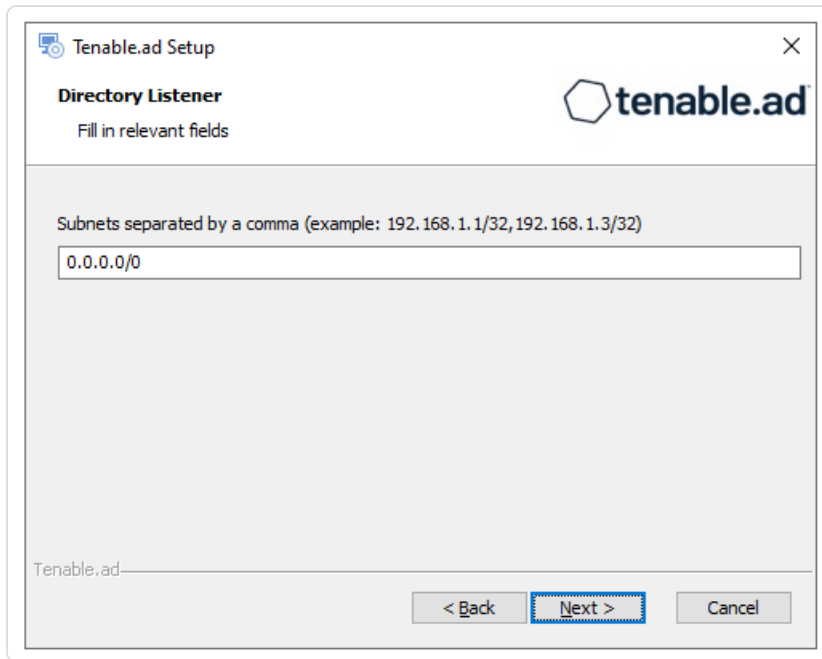

15. Click **Next**.

The **Ready to Install** window appears.

16. Click **Install** to begin the installation.

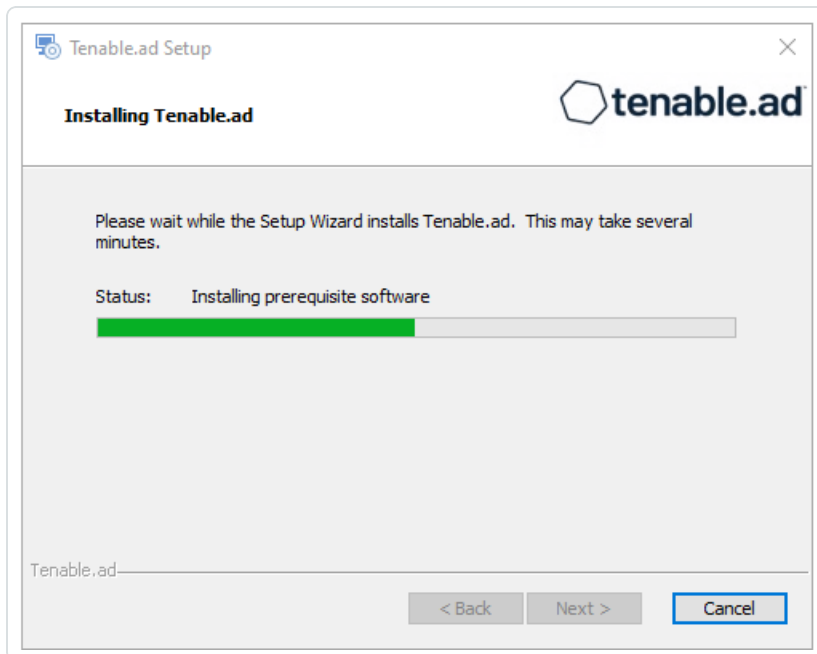



After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

17. Click **Finish**.

A dialog box asks you to restart your machine.

18. Click **Yes**.

The machine restarts.

19. Restart the SEN machine.

20. Restart the Storage Manager machine.

Installation with No TLS

Required User Role: Administrator on the local machine

This installation type installs the following Tenable Identity Exposure components without TLS.

Order of installation

Install the components in the following order:

1. [Storage Manager](#)
2. [Security Engine Node](#)
3. [Directory Listener](#)


Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

To install the Storage Manager with no TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

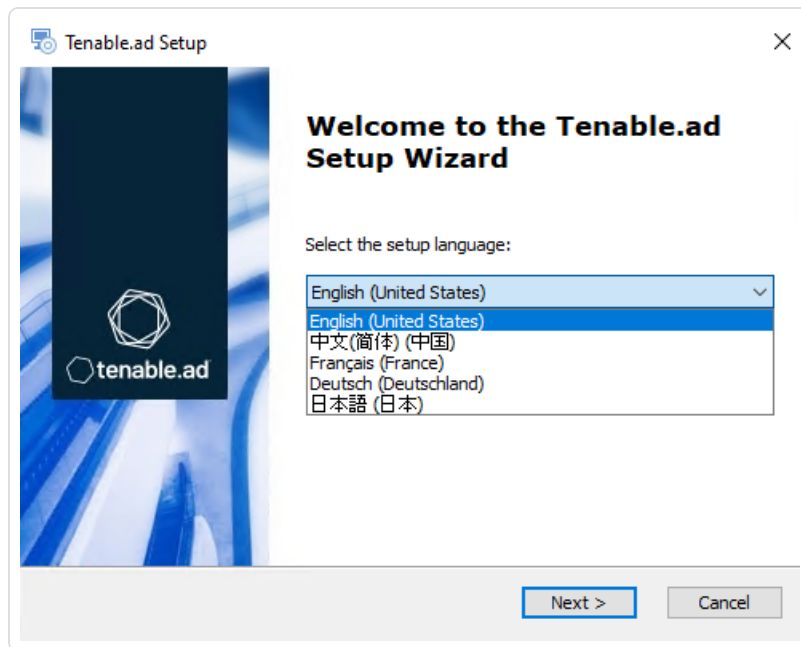

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

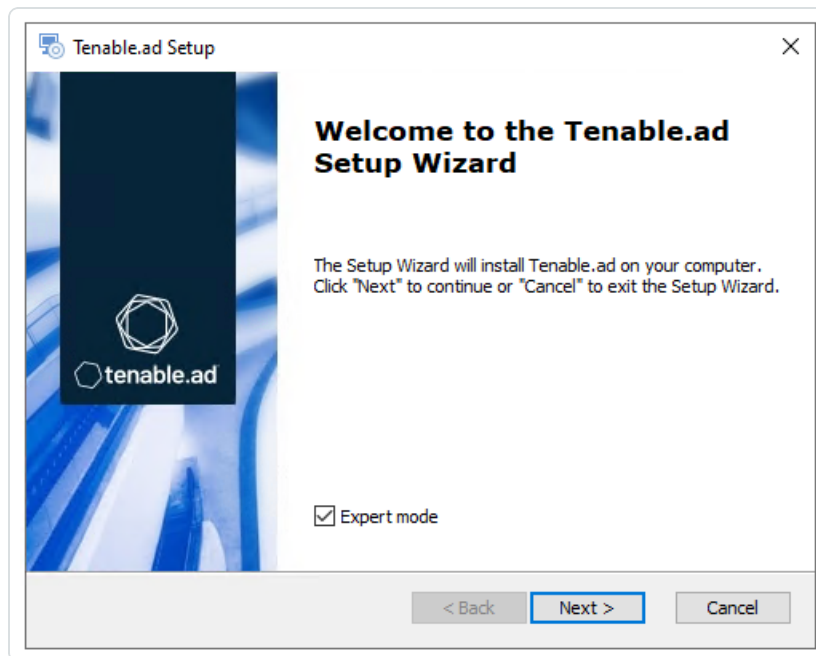


4. Click **Next**.

The **Custom Setup** window appears.




5. Deselect the *Security Engine Nodes* and *Directory Listener* components.

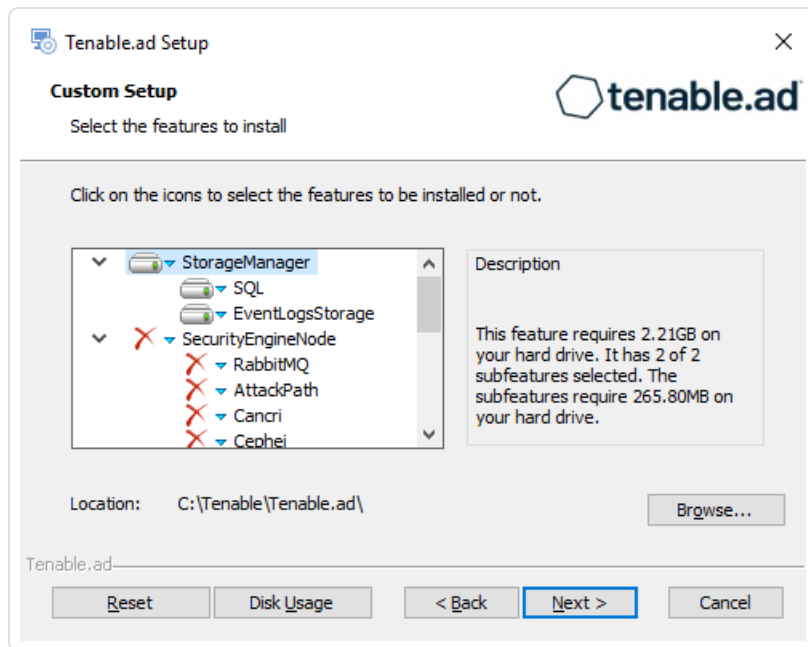

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **No TLS** option.

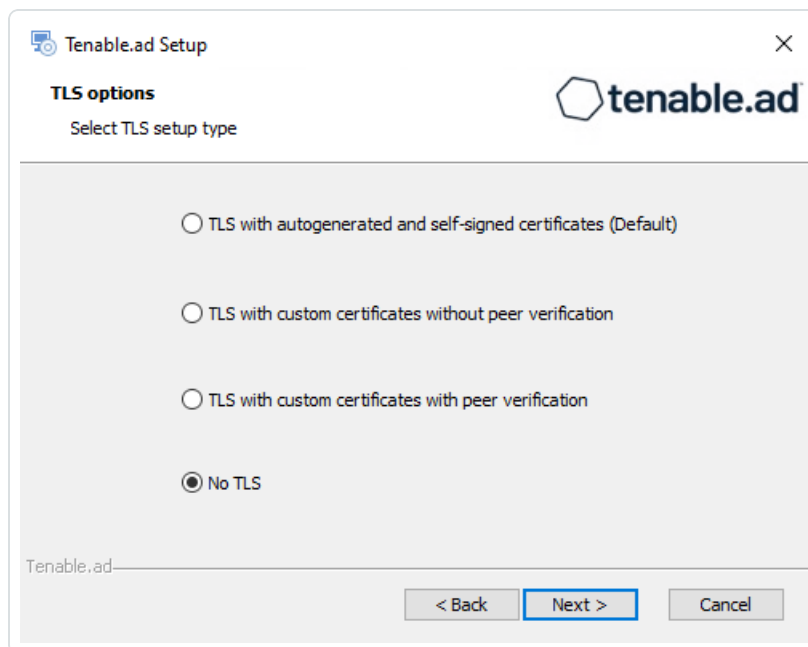

8. Click **Next**.

The **Storage Manager** window appears.



9. In the **Password** box, type a password for the MSSQL database.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

tenable.ad

MSSQL		Event Logs Storage	
IP	127.0.0.1	IP	127.0.0.1
Port	1433	Port	4244
Password	••••••••		
Instance Name	TENABLE		
SQL UserDB Disk	C:\		
SQL UserDB Log Disk	E:\		
SQL TempDB Disk	F:\		

Tenable.ad

< Back Next > Cancel


Note: Tenable strongly recommends that you keep the default TENABLE instance name.

10. Click **Next**.

The **Ready to Install** window appears.



11. Click **Install** to begin the installation.

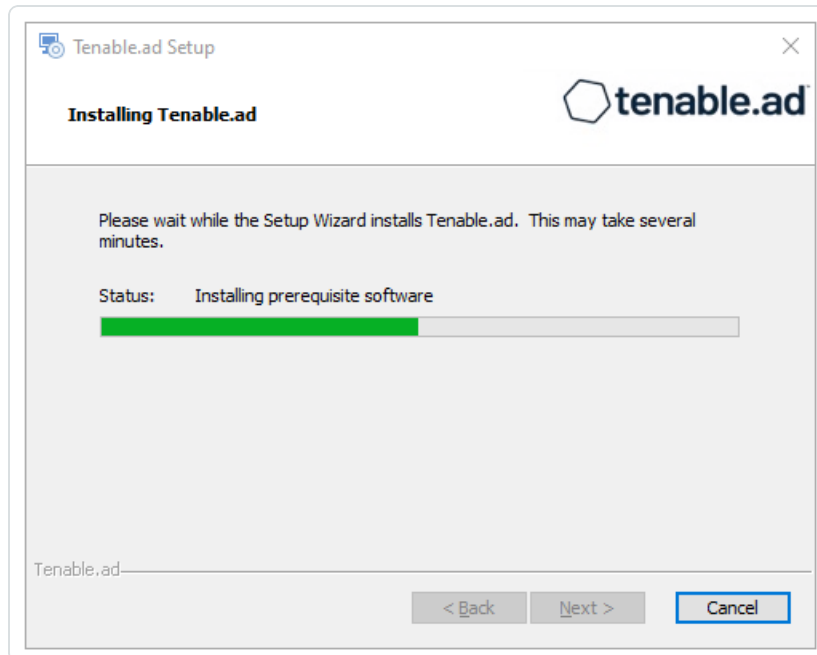

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

12. Click **Finish**.

A dialog box asks you to restart your machine.

13. Click **No**.

Caution: Do not restart the machine now.


14. Install the Security Engine Node.

To install the Security Engine Node with no TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

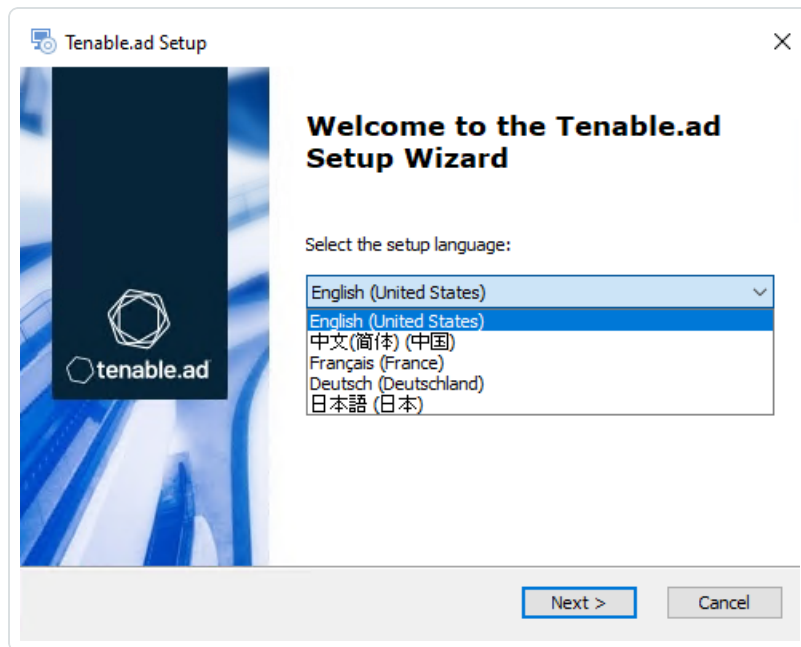

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

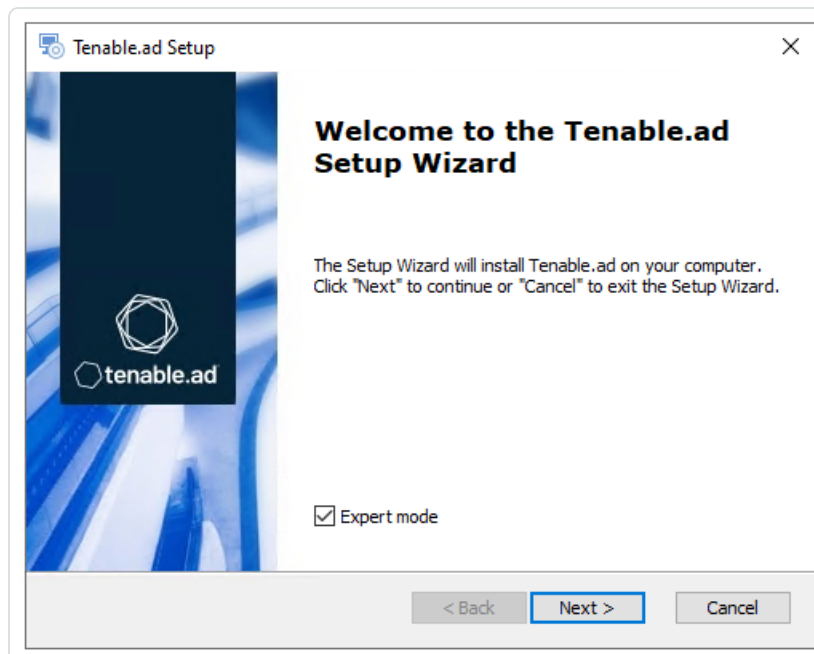


4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Storage Manager* and *Directory Listener* components.


Note: To install SEN services over several machines, see [Split Security Engine Node \(SEN\) Services](#).

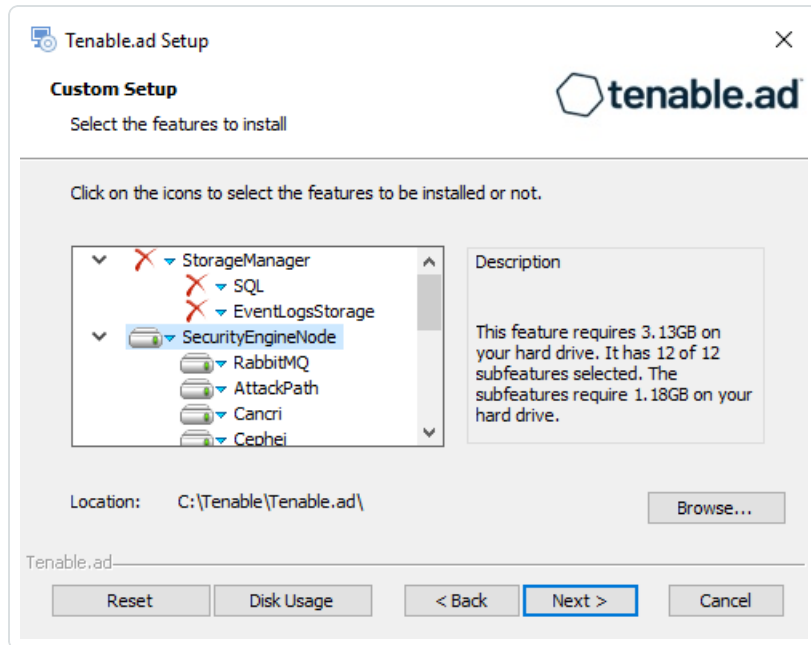

6. Click **Next**.

The **TLS Options** window appears.

7. Select the **No TLS** option.

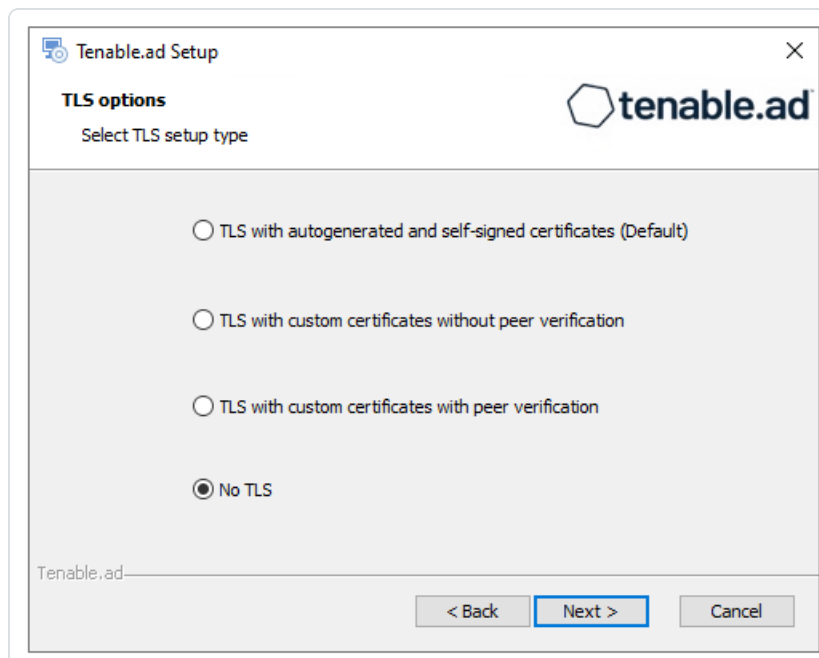

8. Click **Next**.



The **Storage Manager** window appears.

9. Provide the following information:

- In the **MSSQL** box, type the IP address of the Storage Manager.
- In the **Password** box, type the service account password for the MSSQL database defined in the Storage Manager installation.

Note: The installer requires an SA password with the syntax described in [Strong Passwords](#) for the SQL Server.

MSSQL		Event Logs Storage	
IP	10.0.50.101	IP	10.0.50.101
Port	1433	Port	4244
Password	••••••••		
Instance Name	TENABLE		
SQL UserDB Disk	C:\		
SQL UserDB Log Disk	E:\		
SQL TempDB Disk	F:\		

10. Click **Next**.

The **Security Engine Node** window appears.

11. In the **DNS name or IP** box, type the DNS name (preferred) or IP address of the web server that end users enter to access Tenable Identity Exposure.



After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **No**.

Caution: Do not restart the machine now.


16. Install the Directory Listener.

To install the Directory Listener with no TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

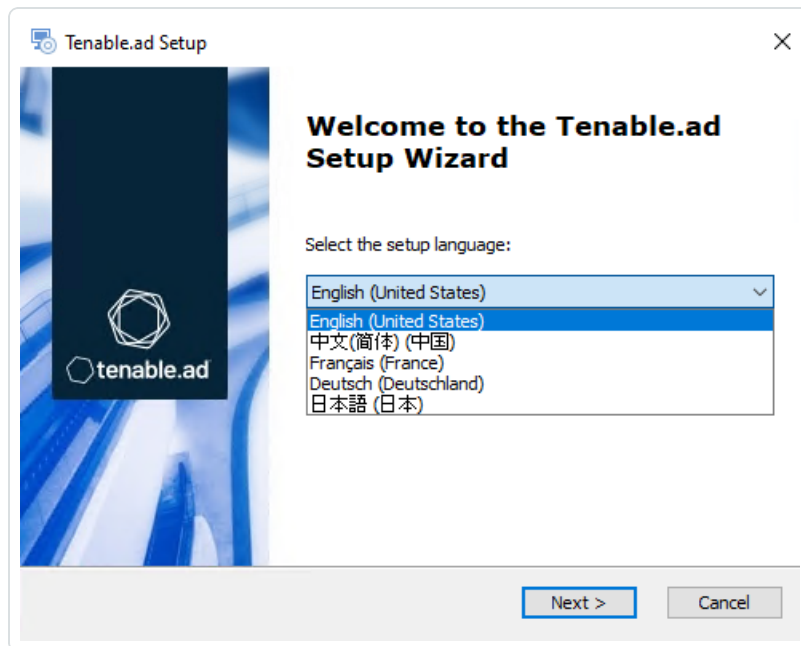

The **Setup Wizard** appears.


3. Select the **Expert Mode** checkbox.

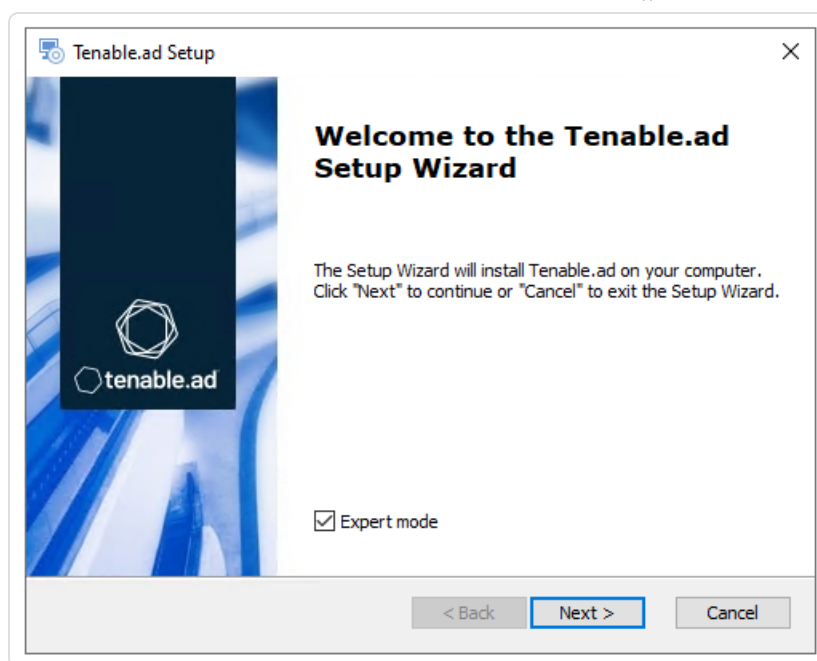

4. Click **Next**.

The **Custom Setup** window appears.

5. Deselect the *Storage Manager* and the *Security Engine Nodes* components.

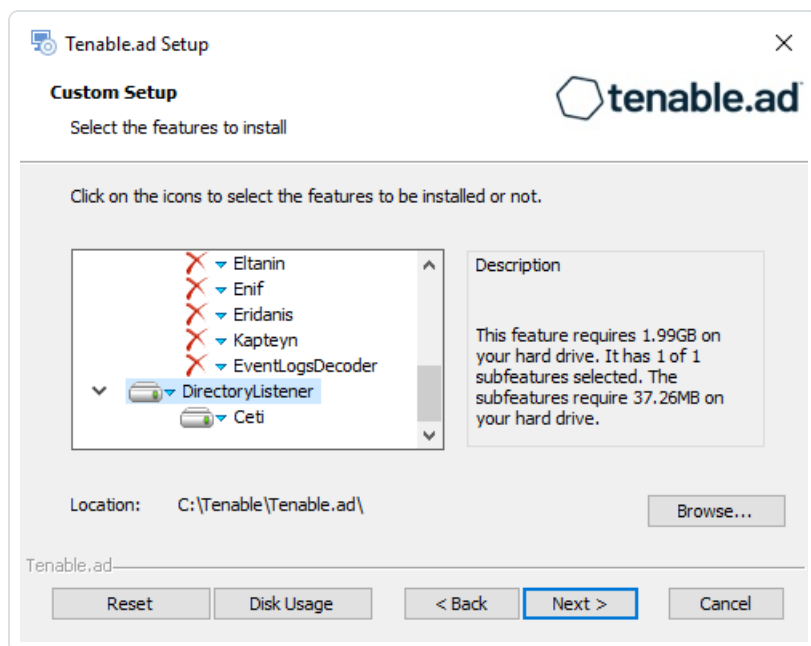

6. Click **Next**.

The **TLS Options** window appears.



7. Select the **No TLS** option.

The screenshot shows the 'Tenable.ad Setup' window with the 'TLS options' section. The title bar reads 'Tenable.ad Setup' and the window contains the Tenable.ad logo. Below the logo, the text 'TLS options' and 'Select TLS setup type' is displayed. There are four radio button options: 'TLS with autogenerated and self-signed certificates (Default)', 'TLS with custom certificates without peer verification', 'TLS with custom certificates with peer verification', and 'No TLS'. The 'No TLS' option is selected. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

8. Click **Next**.

The **Security Engine Node** window appears.

9. In the **Host** box for RabbitMQ, type the hostname of the Security Engine Node hosting RabbitMQ.

The screenshot shows the 'Tenable.ad Setup' window with the 'Security Engine Node' section. The title bar reads 'Tenable.ad Setup' and the window contains the Tenable.ad logo. Below the logo, the text 'Security Engine Node' and 'Fill in relevant fields' is displayed. There is a table with two columns: 'IP' and 'Port'. The rows are: 'RabbitMQ' (IP: 10.0.50.102, Port: 5672), 'Eridanis' (IP: 127.0.0.1, Port: 3000), 'Electra' (IP: 127.0.0.1, Port: 3002), 'Enif' (IP: 127.0.0.1, Port: 3003), and 'Attack Path' (IP: 127.0.0.1, Port: 4242). Below the table, there is a 'DNS name or IP' label and a text box for 'Kapteyn'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.


	IP	Port
RabbitMQ	10.0.50.102	5672
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

10. Click **Next**.



The **Directory Listener** window appears.

11. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

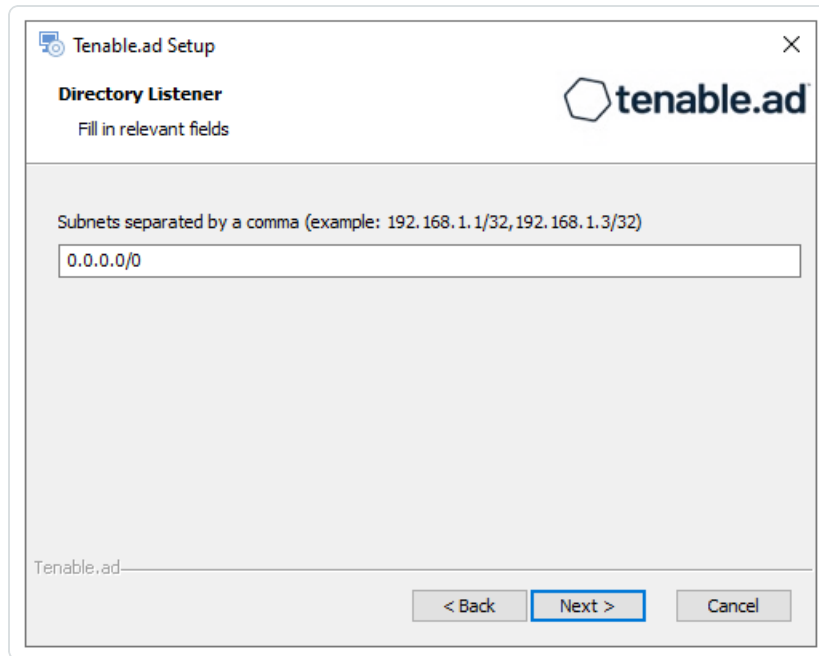


12. Click **Next**.

The **Ready to Install** window appears.



13. Click **Install** to begin the installation.

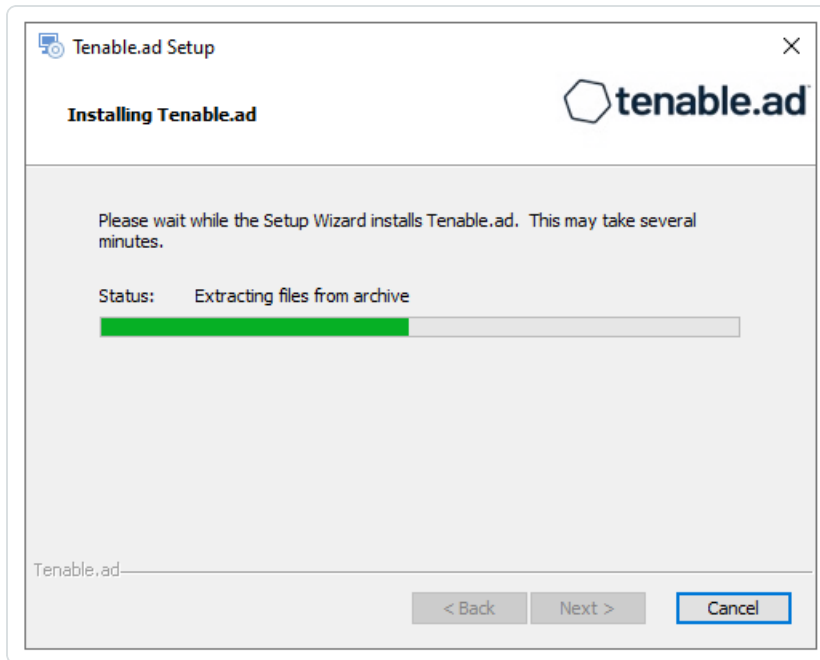

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **Yes**.

The machine restarts.

16. Restart the SEN machine.

17. Restart the Storage Manager machine.

Security Probe

Required User Role: Administrator on the local machine

You install Tenable Identity Exposure's security probe in a SaaS-TLS deployment.

Before you start




- Obtain from Tenable Identity Exposure the `certs.zip` archive that contains the required certificate files to configure the SaaS-TLS installation.
- Extract the required certificate files to a local directory.
- Obtain from Tenable Identity Exposure the public IP address for RabbitMQ.

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.


To install the security probe:

1. On the local machine, run the installation file `Tenable.ad_Security_Probe_v3.19.x.exe`.
A welcome screen appears.
2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

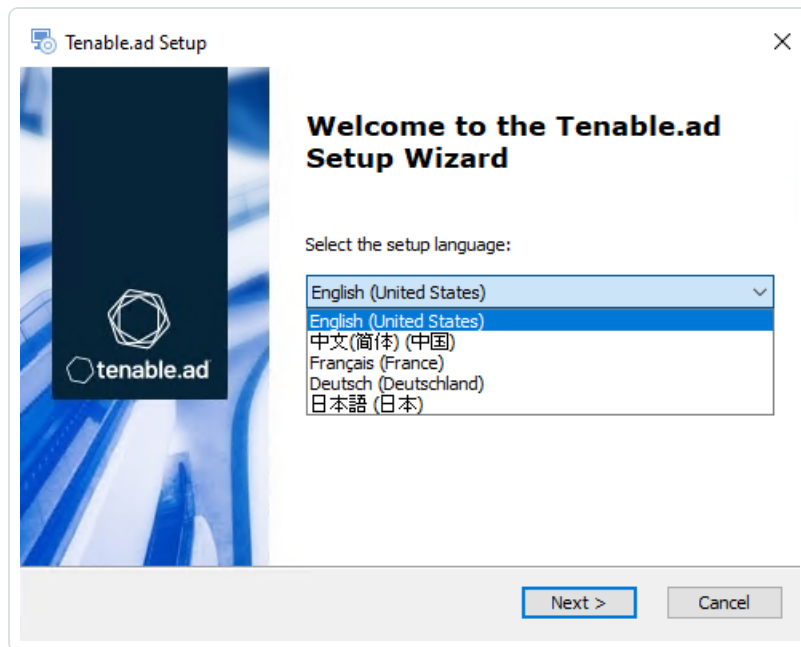


The **Security Probe Setup Wizard** appears.

3. Click **Next**.

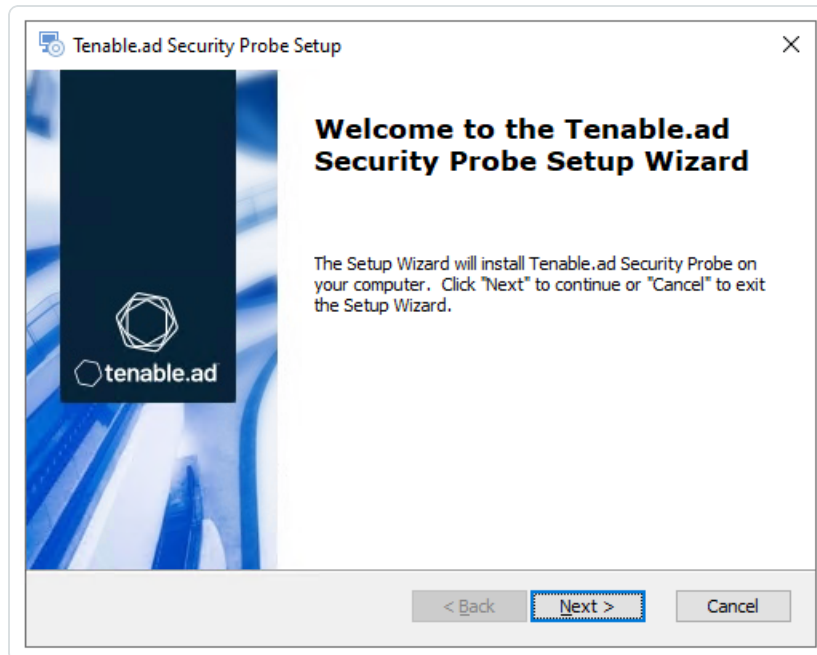

The **Custom Setup** window appears.

4. Click **Browse** to select the installation folder location. Change only the drive letter.

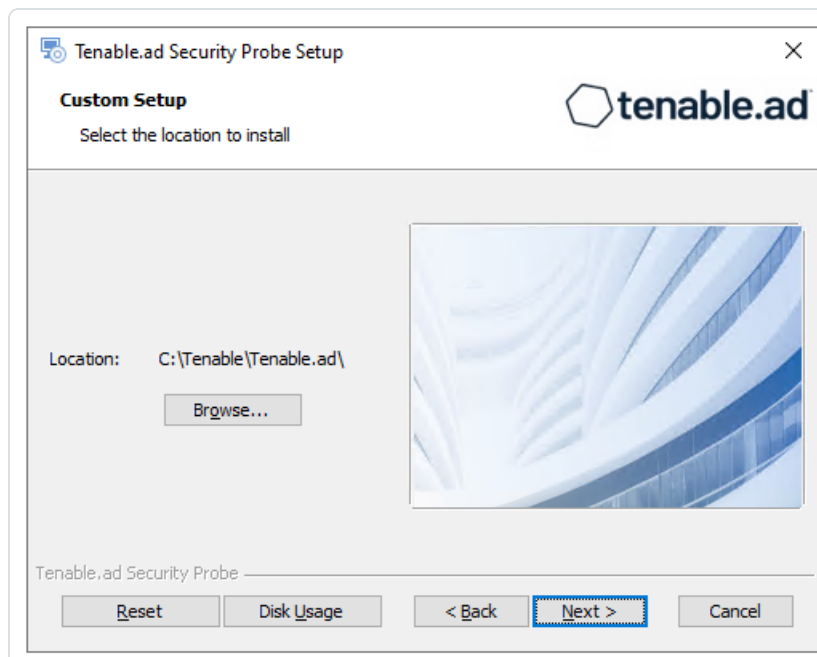


5. Click **Next**.

The **TLS certificates** window appears.



6. Provide the following information extracted from the the `certs.zip` archive:

- In the **Client PFX Archive** box, click ... to browse to your PFX archive.
- In the **PFX Password** box, type the password for the PFX file.
- In the **CA Cert File** box, click ... to browse to your CA certificate file.

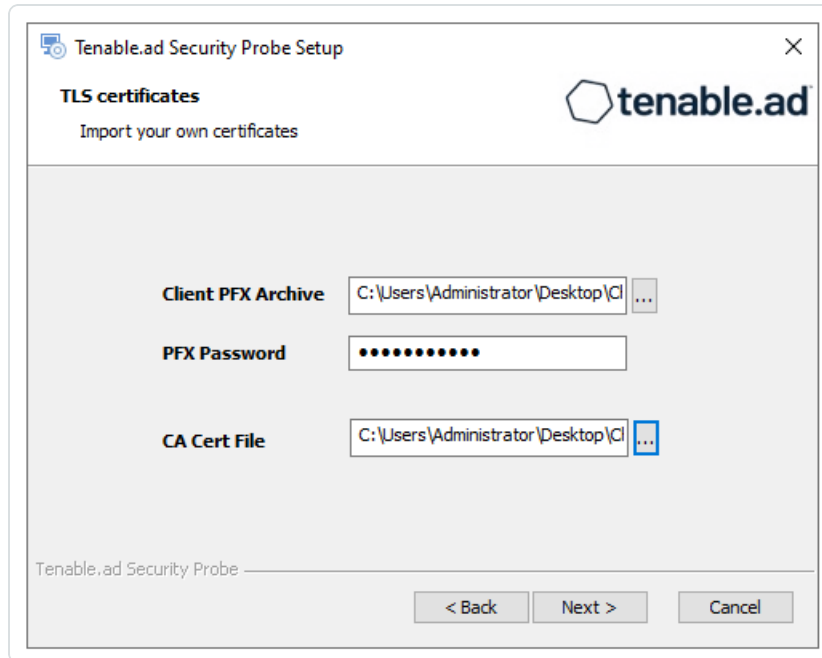

7. Click **Next**.

The **Security Engine Node** window appears.


8. In the **IP** box, type the public IP address for RabbitMQ that you obtained from Tenable Identity Exposure.



9. Click **Next**.

The **Security Probe** window appears.


10. In the **Subnets** box, type the subnet address for the security probe. For multiple subnets, use a comma to separate the addresses.

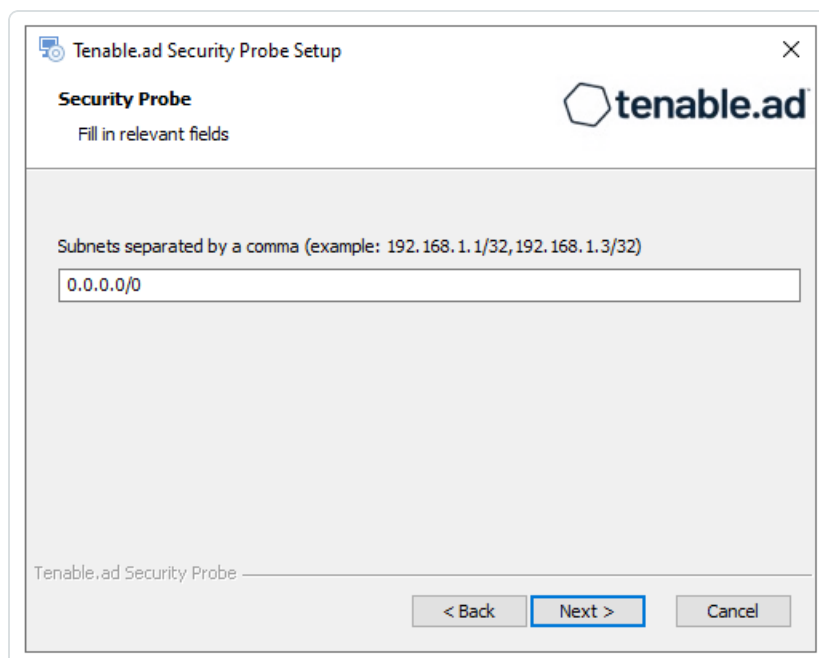


11. Click **Next**.



The **Ready to Install** window appears.

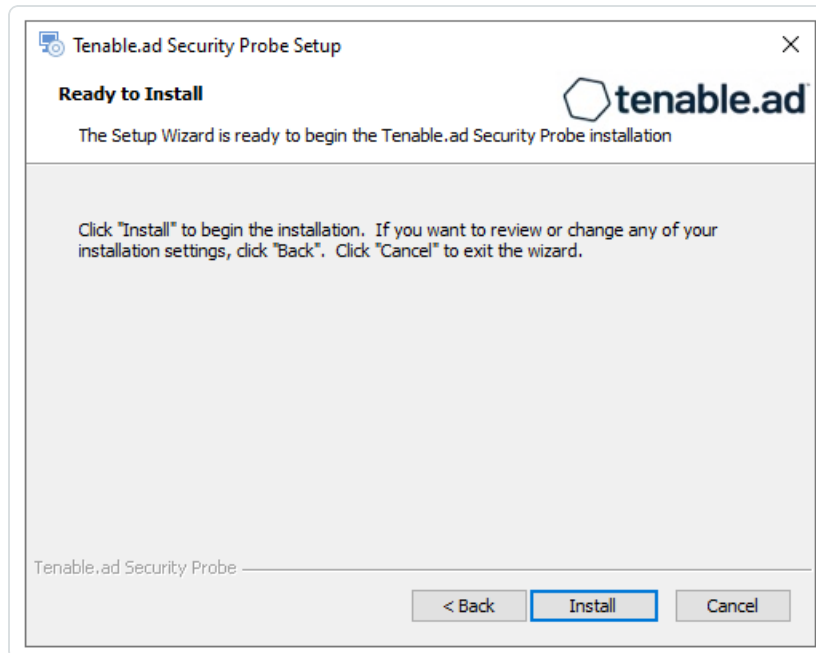

12. Click **Install** to begin the installation.

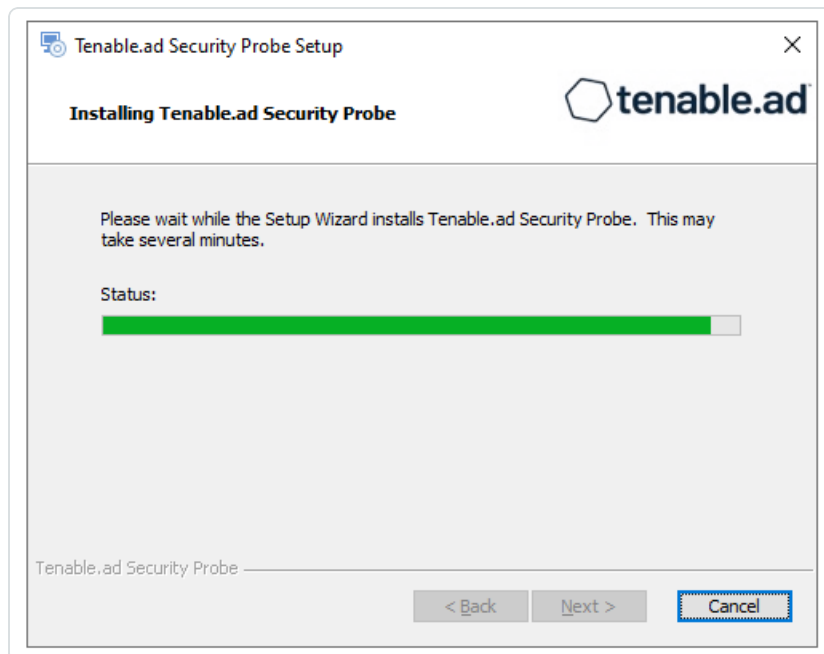

When the installation completes, the **Completing the Tenable.ad Security Probe Setup Wizard** window appears.

13. Click **Finish**.



A dialog box message asks you to restart your machine.

14. Click **Yes**.

The machine restarts.

Split Security Engine Node (SEN) Services

The standard architecture for the Tenable Identity Exposure on-premises platform uses three virtual machines (VMs) by default for the Storage Manager, Security Engine Node, and Directory Listener.

However, if the environment that you monitor has **more than 150K users**, you can split the Security Engine Node (SEN) over five different machines to improve performance.

The installation process installs the following Tenable Identity Exposure components:

VM #	vCPU (per instance)	Memory (per instance)	Disk Space (per instance)	Recommended Service	Service Description
1	8 cores – at least 2.6 GHz	16 GB of RAM	1 TB	RabbitMQ	A message broker between services.
2	8 cores – at least 2.6 GHz	16 GB of RAM	100 GB	Attack Path	Computes attack path relations and maintaining them over time.
3	12 cores – at least 2.6 GHz	32 GB of RAM	300 GB	Cephei	Computes values for different analytics used for the Tenable Identity Exposure dashboards.
				CetiBridge	Communication plugins and service in charge



					of communicating with the Active Directory.
				Electra	Manages web sockets to update information without reloading the user interface.
				Enif	Authenticates web users.
				Eridanis	Connects to the SQL Server; ensures the exactness of Tenable Identity Exposure's information.
				Eltanin	Sends data to the Tenable Cloud, if enabled in Tenable Identity Exposure.
				Kapteyn	Runs in the end user's browser to show the user interface.
4	16 cores – at least 2.6 GHz	16 GB of RAM	100 GB	Cancri	Decodes raw information; fetches delta



					between events; computes event type.
				EventLogsDecoder	Decodes information related to IOA events.
5	16 cores – at least 2.6 GHz	32 GB of RAM	100 GB	Cygni	Computes deviances and attacks.


For more information, see [Sizing the Security Engine Nodes](#) for requirements.

SEN Installation on Several Machines

To install the Security Engine Node on several machines, you select the services to install on each specific virtual machine.

Public Key Infrastructure (PKI) Certificate

To use peer verification, your PKI certificate must include the IP addresses or DNS of all the machines used to install Tenable Identity Exposure.

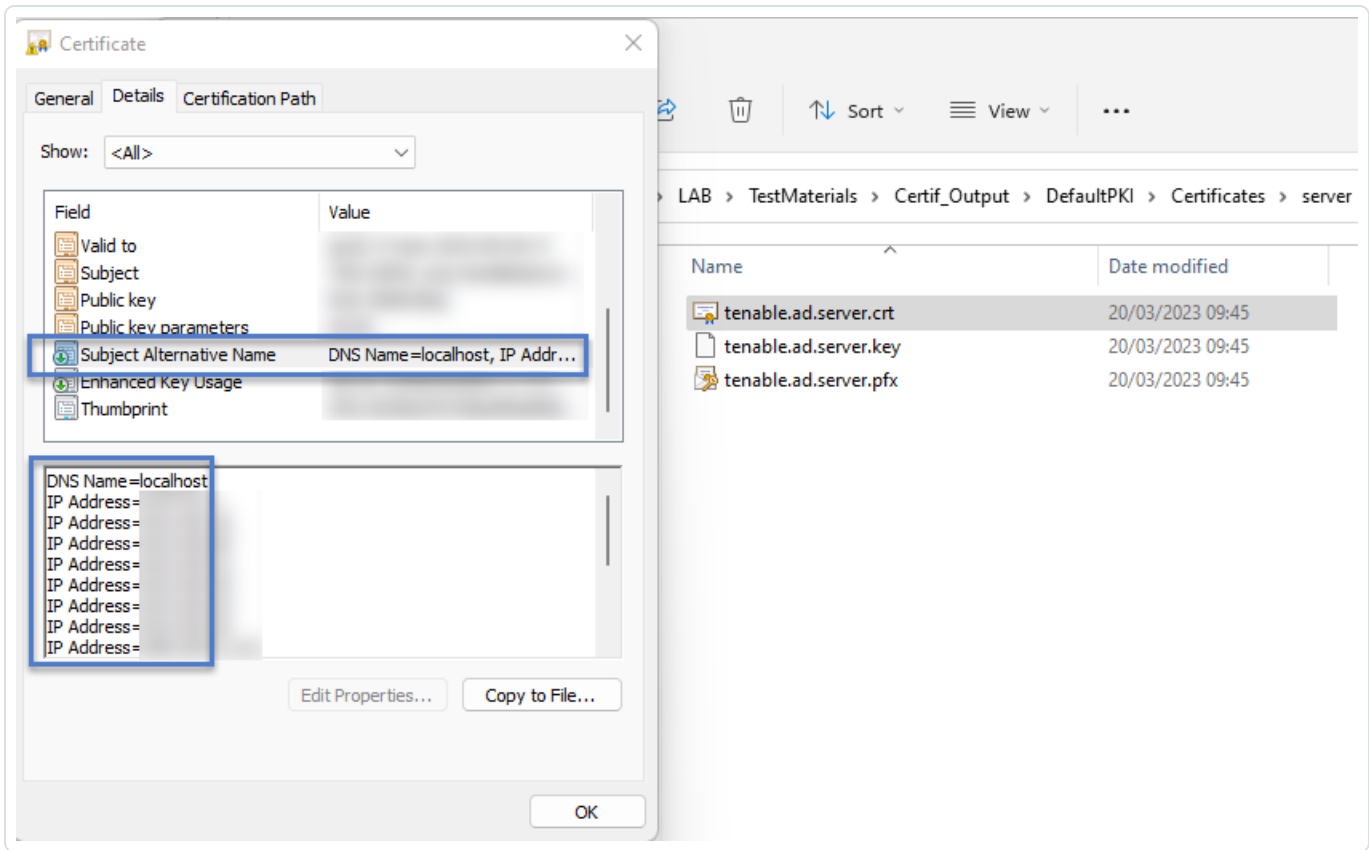

Example


The following example shows an installation of RabbitMQ and Attack Path on one virtual machine.

To install the RabbitMQ and Attack Path services on a VM:

Note: This procedure installs Tenable Identity Exposure with TLS using the "Expert mode."

1. On the local machine, run the installation file `Tenable.ad_v3.19.x.exe`.

The **Setup Wizard** appears.

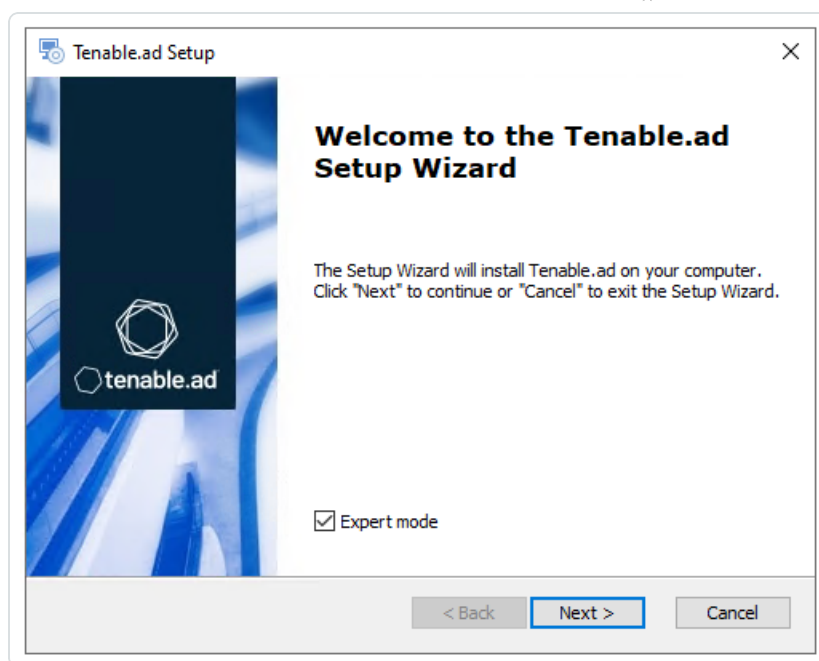


2. Select the **Expert Mode** check box.

3. Click **Next**.

The **Custom Setup** window appears.

4. Deselect the *Storage Manager* and *Directory Listener* components.

5. Deselect all SEN services except for *RabbitMQ* and *AttackPath*.

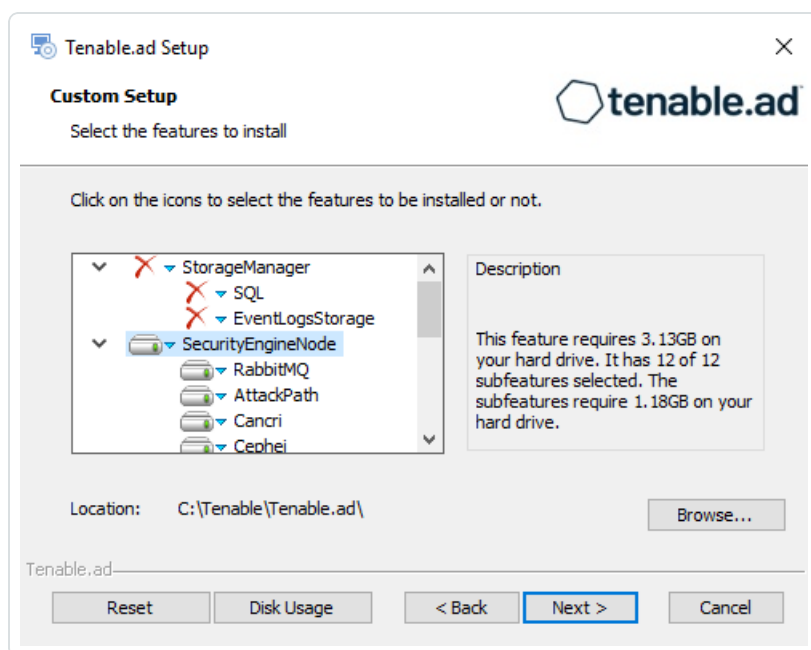




- (Optional) Click **Browse** to change the installation folder location. Change only the drive letter.
- Click **Next**.

The **TLS Options** window appears.

- Select the **TLS with autogenerated and self-signed certificates (Default)** option.

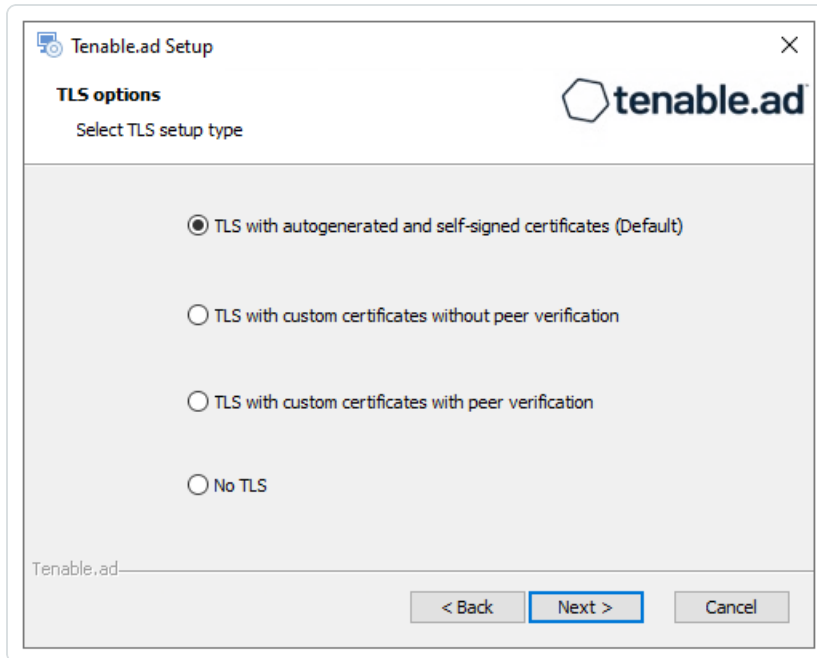

- Click **Next**.

The **Storage Manager** window appears.

- Provide the following information:
 - In the **MSSQL** box, type the IP address of the Storage Manager.
 - In the **Password** box, type the service account password for the MSSQL database defined in the Storage Manager installation.

11. Click **Next**.


The **Security Engine Node** window appears.

12. In the **DNS name or IP** box, type the DNS name (preferred) or IP address of the web server that end users enter to access Tenable Identity Exposure.

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).




13. Click **Next**.
14. The **Directory Listener** window appears.
15. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

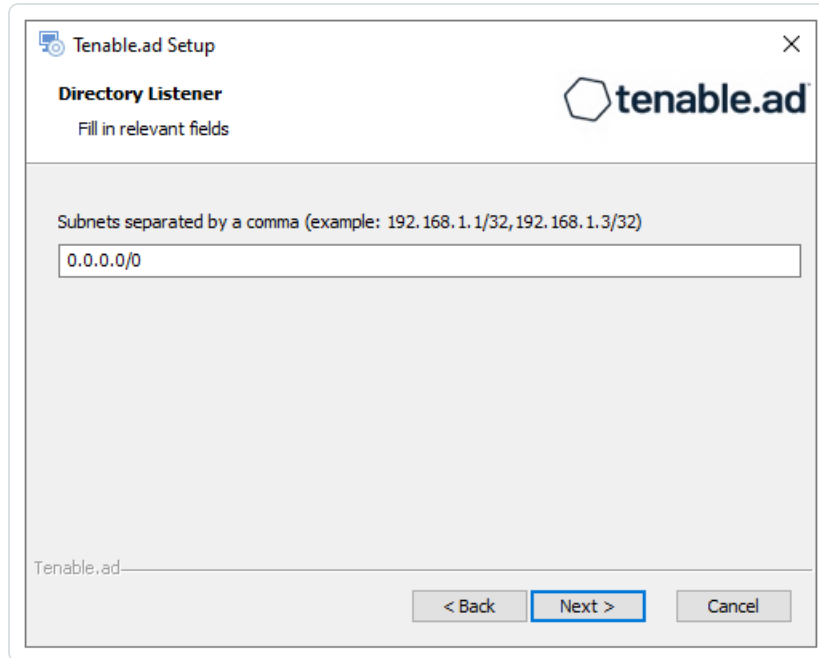

16. Click **Next**.
The **Ready to Install** window appears.



17. Click **Install** to begin the installation.

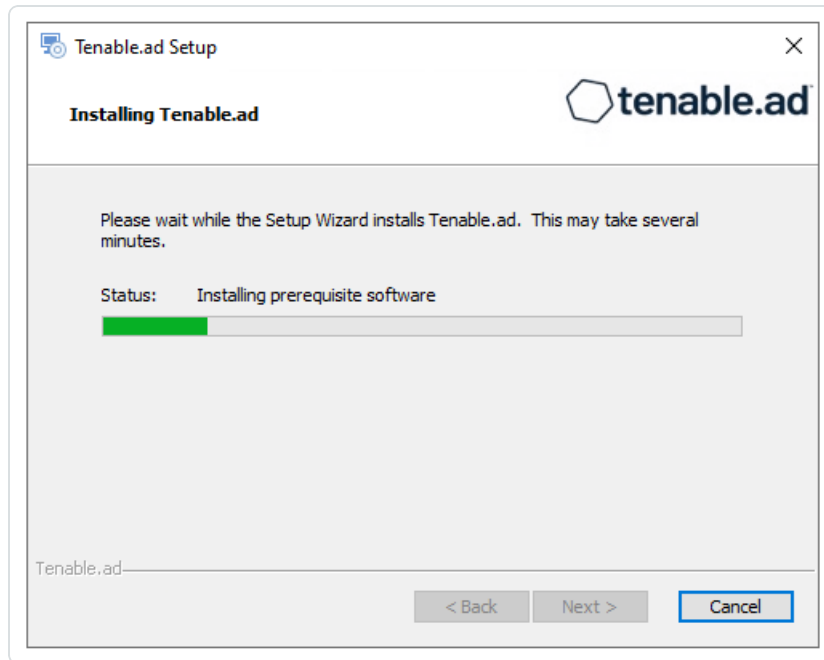

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

18. Click **Finish**.

A dialog box asks you to restart your machine.

19. Click **No**.

Caution: Do not restart the machine until **after** you install the Directory Listener.

20. Repeat this procedure to install the remaining SEN services.

See also

- [Resource Sizing](#) for Security Engine Node
- [Installation Options](#)
- [Install Tenable Identity Exposure](#)
- [Upgrade Tenable Identity Exposure](#)



Upgrade Tenable Identity Exposure

Required User Role: Administrator on the local machine

Before you start

Tenable strongly recommends that you **take a snapshot of your environment before you upgrade**. If the upgrade fails, Tenable Identity Exposure support cannot perform a rollback, and this will result in a fresh installation and cause you to lose your previous data.

Back up and restore the Storage Manager

Tenable strongly recommends that you back up the Storage Manager before you upgrade Tenable Identity Exposure.

For instructions on how to back up or restore MSSQL, see the official Microsoft documentation.

Upgrade path

To upgrade to the latest version of Tenable Identity Exposure, you must follow this installation path: 2.7 -> 3.1 -> 3.11 -> 3.19 -> 3.29 -> 3.42.

Note: You can upgrade to the next major release from any minor release.

Upgrade order

To upgrade Tenable Identity Exposure, proceed in the following order:

1. Upgrade the Directory Listener.
2. Upgrade Security Engine Nodes.
3. Upgrade the Storage Manager.

Note: During the upgrade, the Tenable Identity Exposure installer asks you to choose a TLS installation type. For more information, see [Installation Options](#).

See also



- [Installation Options](#)
- [Upgrade with Default TLS](#)
- [Upgrade with Default TLS using "Expert Mode"](#)
- [Upgrade with TLS without Peer Verification](#)
- [Upgrade with TLS and with Peer Verification](#)
- [Upgrade with No TLS](#)
- [Restart Services](#)

Upgrade with Default TLS

Required User Role: Administrator on the local machine

This process upgrades the following Tenable Identity Exposure components in default TLS mode without peer verification and with self-signed certificates.

At each upgrade, Tenable Identity Exposure generates a new self-signed certificate. The validity period for the certificate is 3650 days. After the installation or upgrade, the certificates are located at `C:\Tenable\Tenable.ad\DefaultPKI\Certificates`.

Note: You can change this default TLS option at a later date if you wish and upload your own certificates.

Order of Upgrade

Upgrade the components in the following order:

1. [Directory Listener](#)
2. [Security Engine Node](#)
3. [Storage Manager](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

Note: Restart your machine **before** each upgrade.



After you upgrade the components, restart the machines in the following order:


1. Storage Manager
2. Security Engine Node
3. Directory Listener

To upgrade the Directory Listener with default TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.


2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

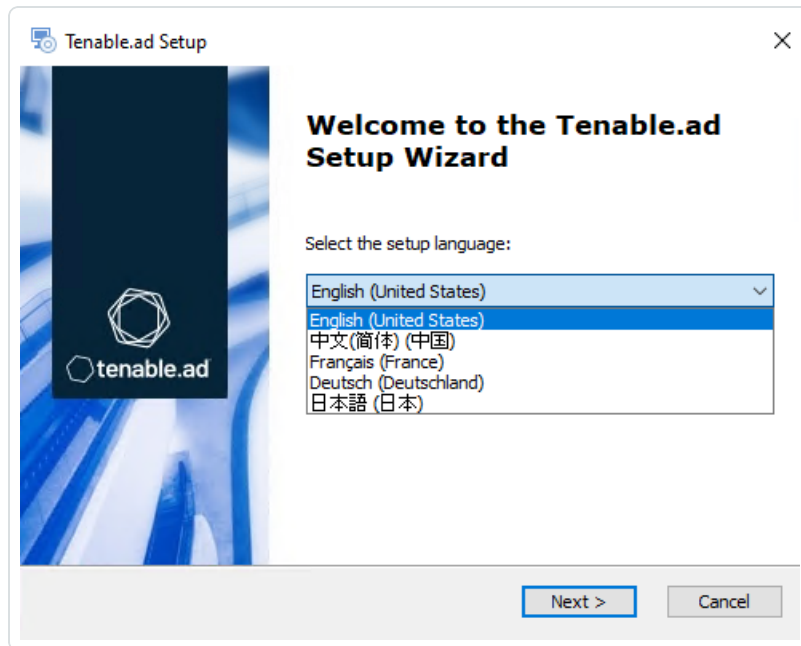

The **Setup Wizard** appears.

3. Click **Next**.

Note: Do not select the "Expert Mode" checkbox.

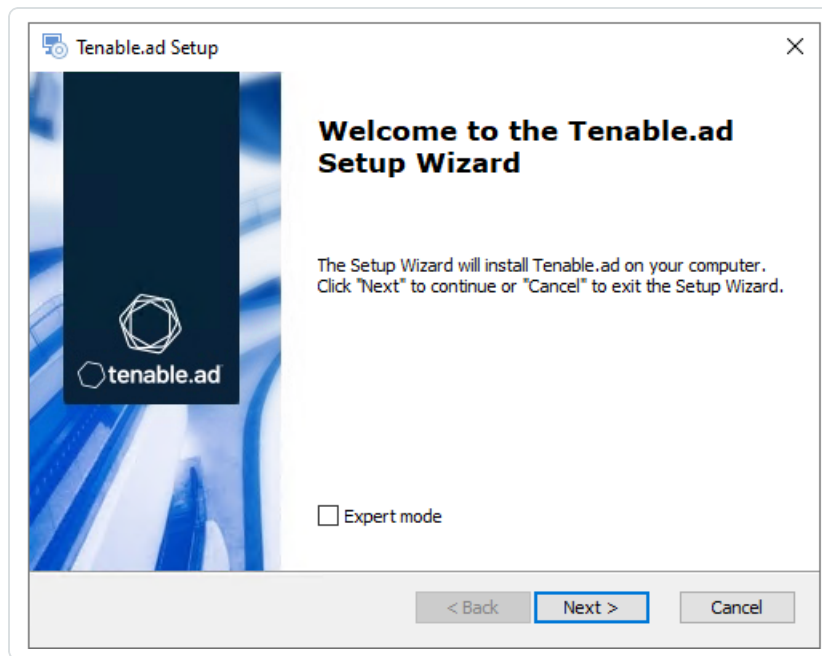


The **Custom Setup** window appears.

4. Click **Next**.

The **Custom Setup** window appears.

5. The installer preselects the Directory Listener component. If this is not the case, deselect the *Storage Manager* and the *Security Engine Nodes* components.

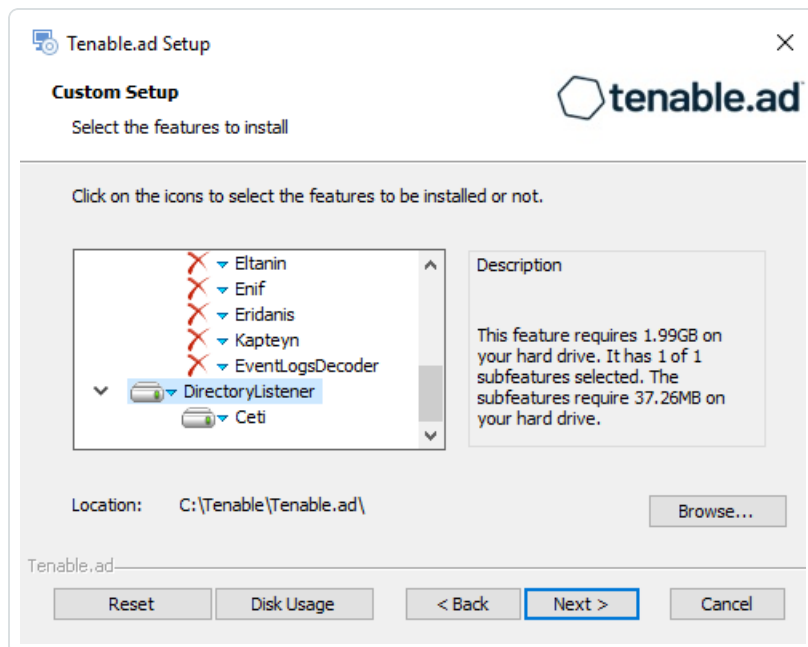

6. Click **Next**.



The **Security Engine Node** window appears.

7. In the **IP** box for RabbitMQ, the installer shows the address of the Security Engine Node machine based on your previous installation. Check that this information is still valid and correct if necessary.

	IP	Port
RabbitMQ	172.26.112.73	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

DNS name or IP

Kapteyn

< Back Next > Cancel

8. Click **Next**.

The **Ready to Install** window appears.


The Setup Wizard is ready to begin the Tenable.ad installation

Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.

< Back Install Cancel



- Click **Install** to begin the upgrade.

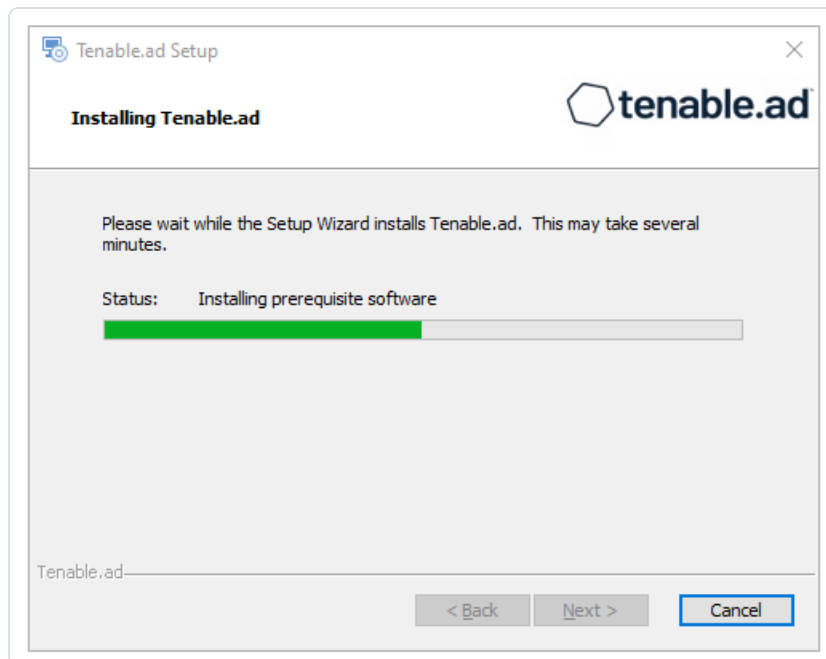

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

- Click **Finish**.

A dialog box asks you to restart your machine.

- Click **No**.

Caution: Do not restart the machine until **after** you complete the upgrade of the Storage Manager.


- Upgrade the Security Engine Node.

To upgrade the Security Engine Node with default TLS:

- On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.


- In the setup language box, click the arrow to select the language for the installation, and click **Next**.

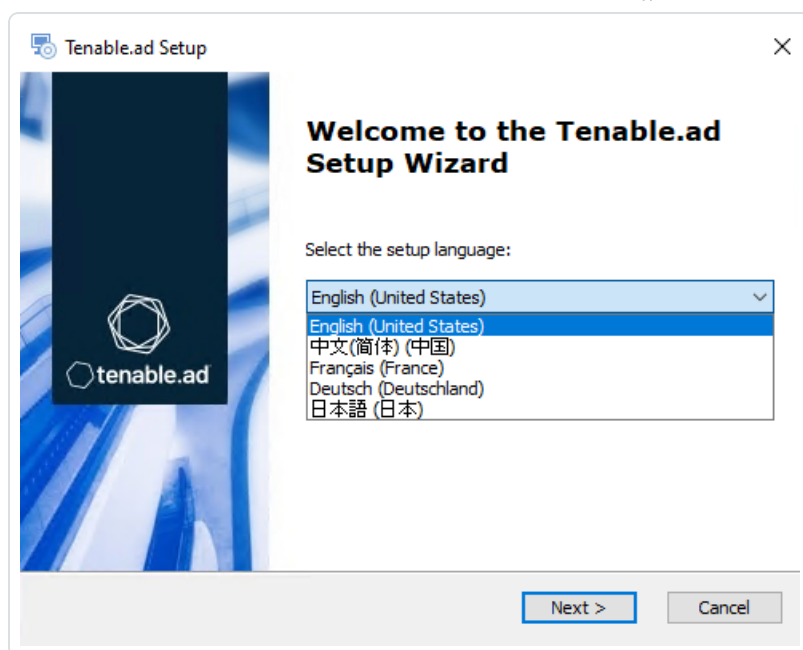

The **Setup Wizard** appears.

3. Click **Next**.

Note: Do not select the "Expert Mode" checkbox.

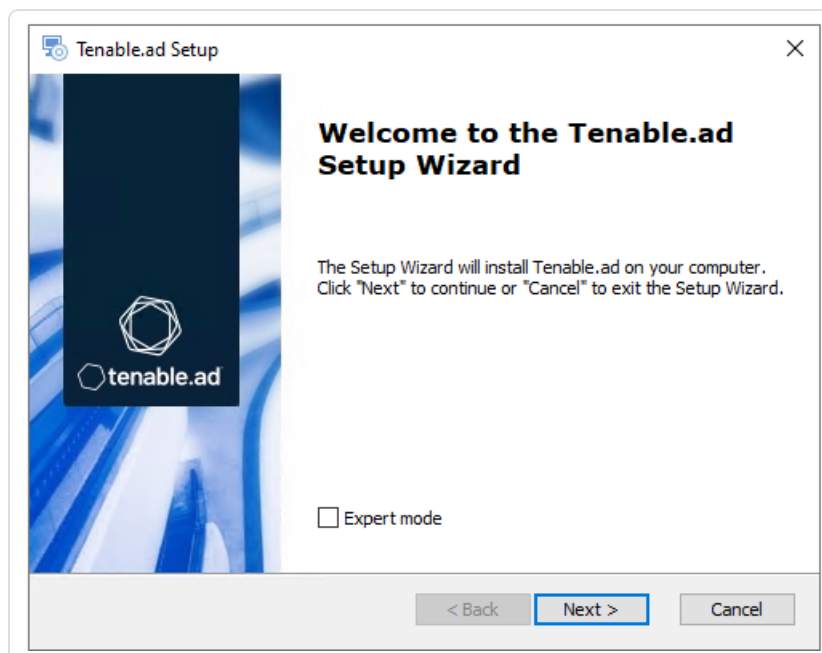


The **Custom Setup** window appears.



4. Click **Next**.

The **Custom Setup** window appears.

5. The installer preselects the Security Engine Node component based on your previous installation. If this is not the case, deselect the *Storage Manager* and the *Directory Listener* components.

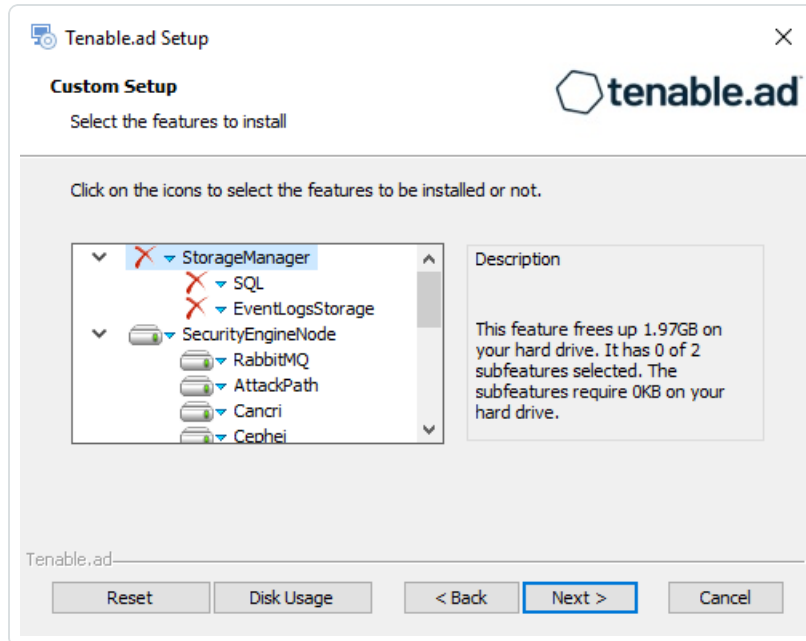

6. Click **Next**.

The **Storage Manager** window appears.

Caution: Remember to update the Event Logs Storage IP or host name address during this step. Failing to do so leads to attack detection issues. If you have successfully completed this screen and upgraded the SEN, you must update the environment variables for `ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host` and `ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host` from the **current value** to the accurate value for **<Storage Manager host name or IP address>**. For more information, see the [Troubleshooting knowledge base article](#).

- The installer shows the IP address of your MSSQL database from your previous installation. Check that it is still valid and correct if necessary. Click **Next**.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.

The **Security Engine Node** window appears.

- In the **DNS name or IP** box, the installer shows the DNS name or IP address of the web server that end users enter to access Tenable Identity Exposure from your previous installation. Check

that it is still valid and correct if necessary.

The screenshot shows the 'Tenable.ad Setup' window with the 'Security Engine Node' configuration. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Security Engine Node' and 'Fill in relevant fields'. The configuration is organized into two sections. The first section has two columns: 'IP' and 'Port'. It contains five rows of input fields for 'RabbitMQ', 'Eridanis', 'Electra', 'Enif', and 'Attack Path'. All IP addresses are set to '127.0.0.1'. The ports are: RabbitMQ (5671), Eridanis (3000), Electra (3002), Enif (3003), and Attack Path (4242). The second section is for 'Kapteyn', with a 'DNS name or IP' field containing '172.26.112.73'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

DNS name or IP
Kapteyn: 172.26.112.73

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).


9. Click **Next**.

The **Ready to Install** window appears.

The screenshot shows the 'Tenable.ad Setup' window at the 'Ready to Install' stage. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Ready to Install' and 'The Setup Wizard is ready to begin the Tenable.ad installation'. The main area contains the following text: 'Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.' At the bottom, there are three buttons: '< Back', 'Install', and 'Cancel'. The 'Install' button is highlighted with a blue border.



10. Click **Install** to begin the installation.

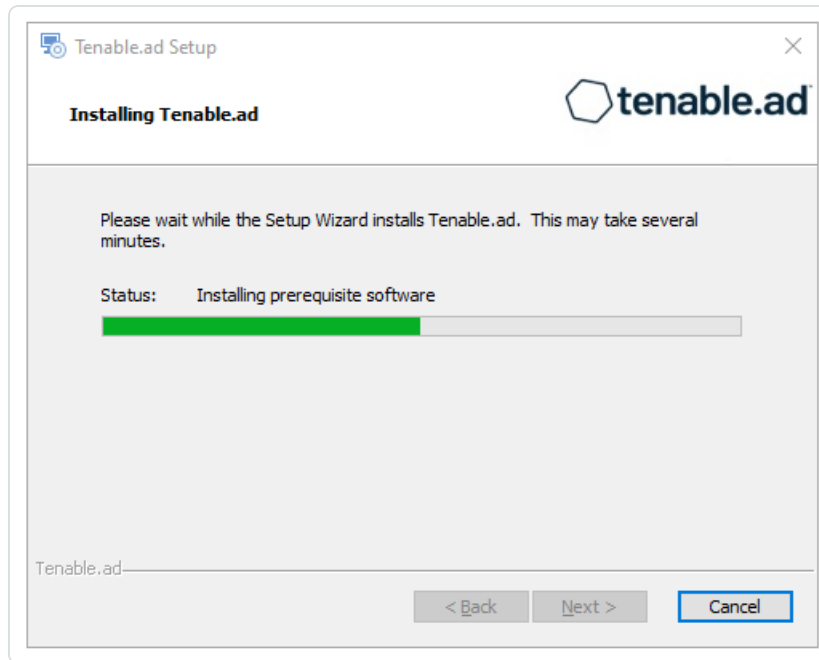

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

11. Click **Finish**.

A dialog box asks you to restart your machine.

12. Click **No**.

Caution: Do not restart the machine until **after** you complete the upgrade of the Storage Manager.


13. Upgrade the Storage Manager.

To upgrade the Storage Manager with default TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.

A welcome screen appears.


2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

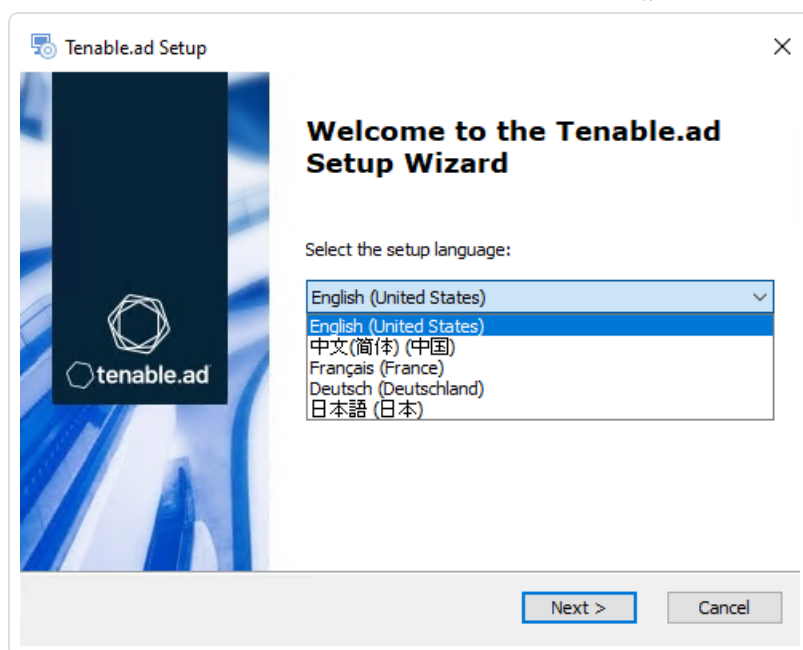

The **Setup Wizard** appears.

3. Click **Next**.

Note: Do not select the "Expert Mode" checkbox.

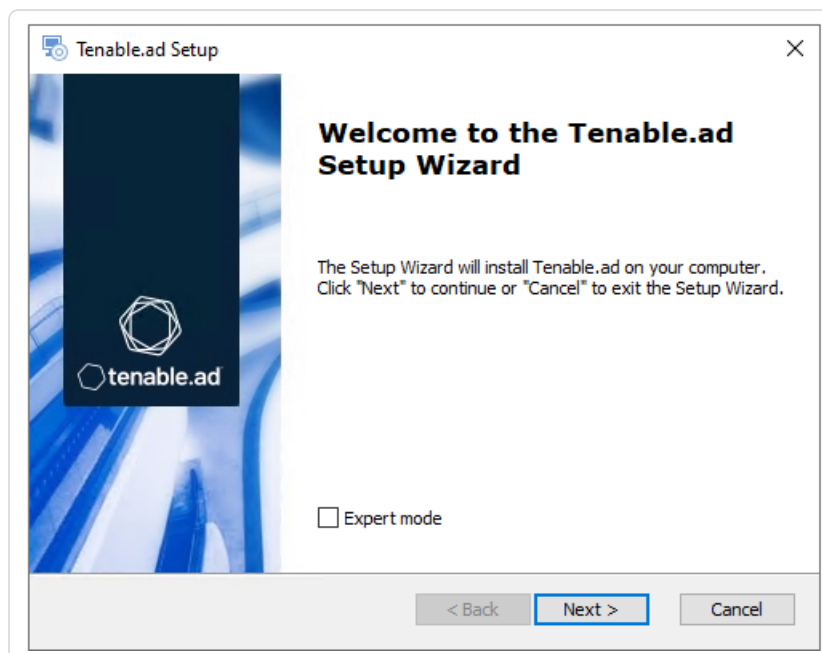


The **Custom Setup** window appears.



4. Click **Next**.

The **Custom Setup** window appears.

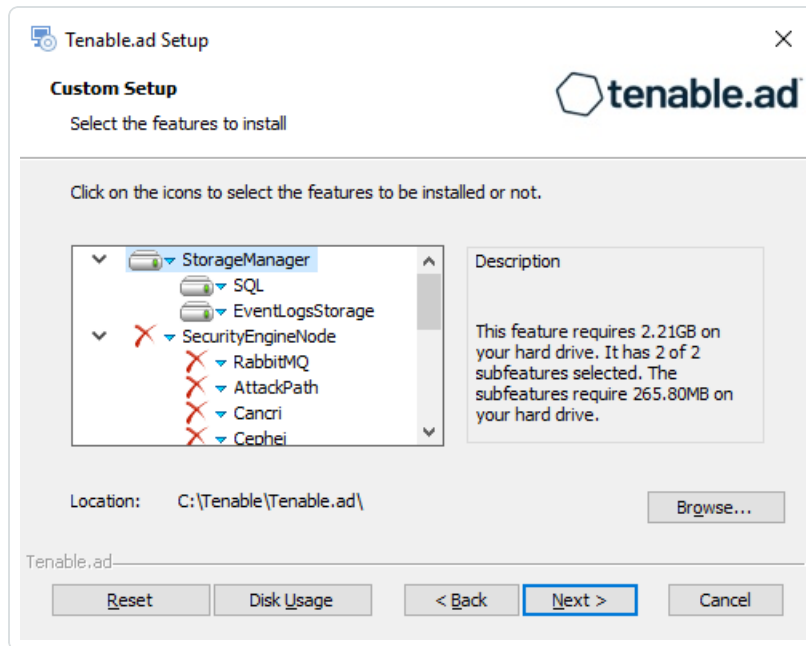


5. The installer preselects the Storage Manager component based on your previous installation. If this is not the case, deselect the *Security Engine Node* and *Directory Listener* components.
6. (Optional) Click **Browse** to change the installation folder location. Change only the drive letter.
7. Click **Next**.

The **Storage Manager** window appears.


8. The installer reuses the information from your previous installation. Click **Next**.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.

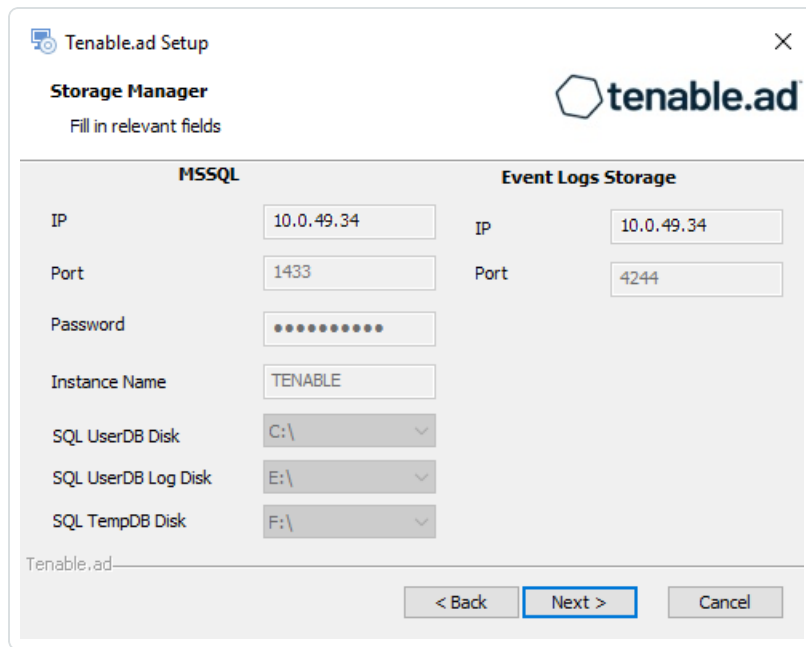


9. Click **Next**.

The **Ready to Install** window appears.

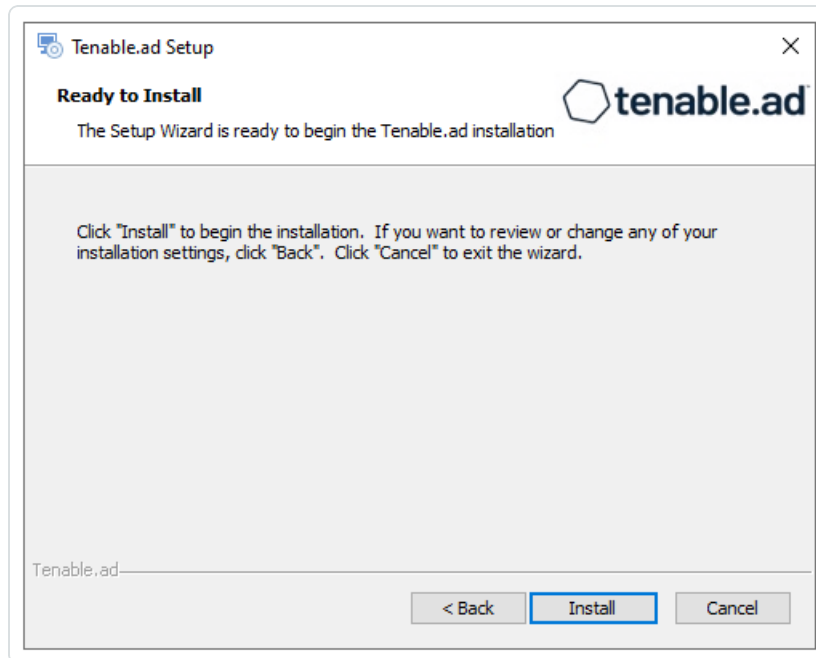

10. Click **Install** to begin the upgrade.

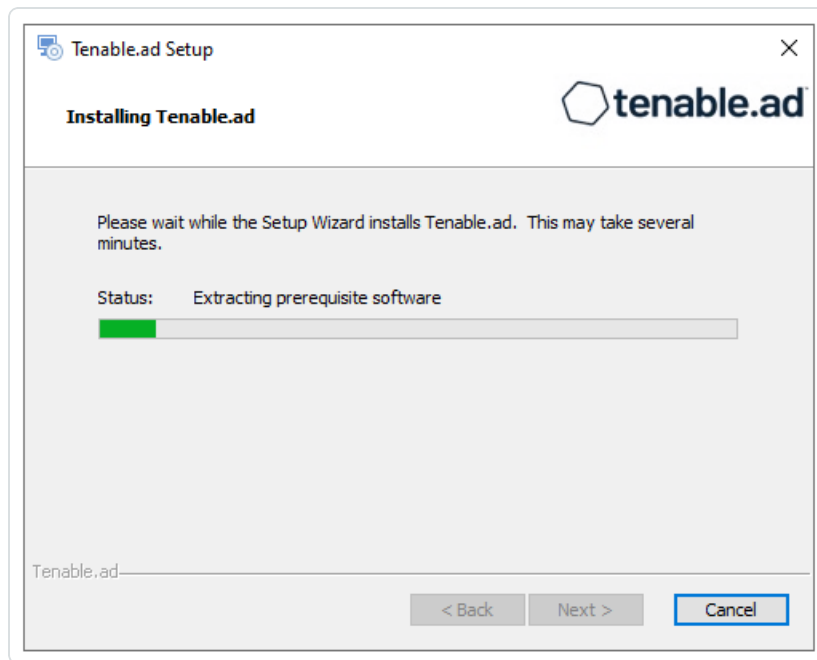

After the installation completes, the **Completing the Tenable.ad Setup Wizard** window appears.

11. Click **Finish**.

A dialog box asks you to restart your machine.

12. Click **Yes**.

The machine restarts.

13. [Restart Services](#).

See also

- [HTTPS for Tenable Identity Exposure Web Application](#)

Upgrade with Default TLS using "Expert Mode"

Required User Role: Administrator on the local machine

This process upgrades the following Tenable Identity Exposure components in TLS mode without peer verification and with auto-generated self-signed certificates. It requires the "Expert mode" in the installation wizard.

Order of Upgrade



Upgrade the components in the following order:

1. [Directory Listener](#)
2. [Security Engine Node](#)
3. [Storage Manager](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.


Note: Restart your machine **before** each upgrade.

After you upgrade the components, restart the machines in the following order:

1. Storage Manager
2. Security Engine Node
3. Directory Listener

To upgrade the Directory Listener with default TLS using the "Expert Mode":


1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.
A welcome screen appears.
2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

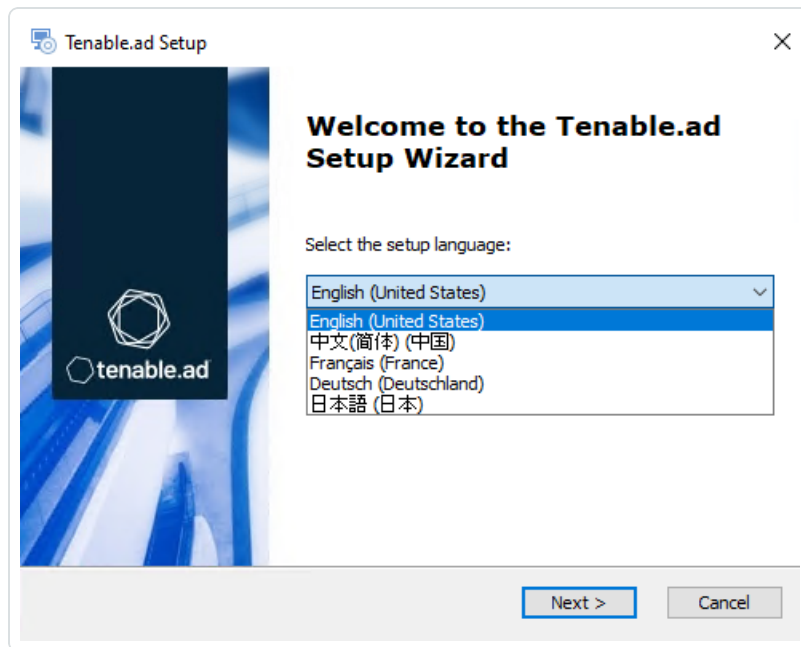

The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.
4. Click **Next**.

The **Custom Setup** window appears.

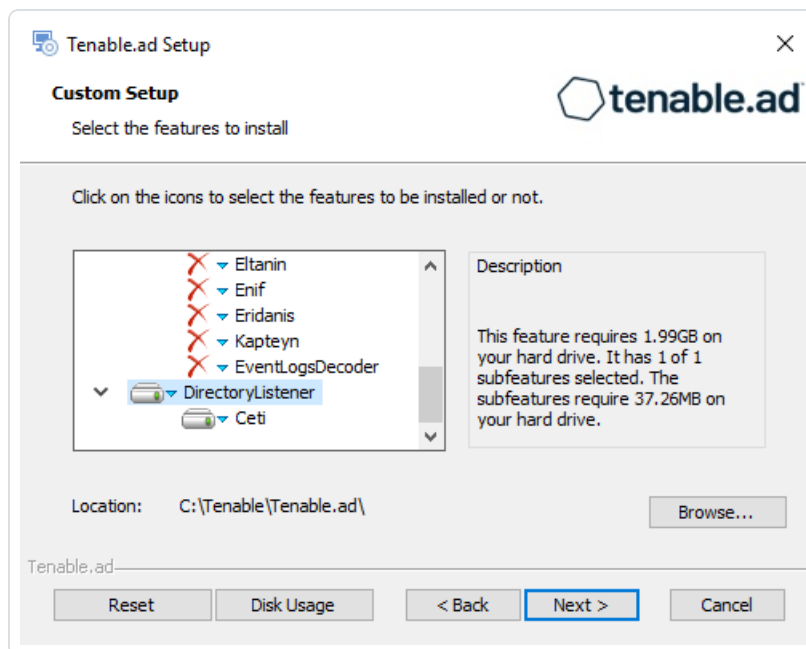


5. The installation program automatically preselects the Directory Listener component based on your previous installation. Click **Next**.



The **TLS Options** window appears.

6. Select the **TLS with autogenerated and self-signed certificates (Default)** option.

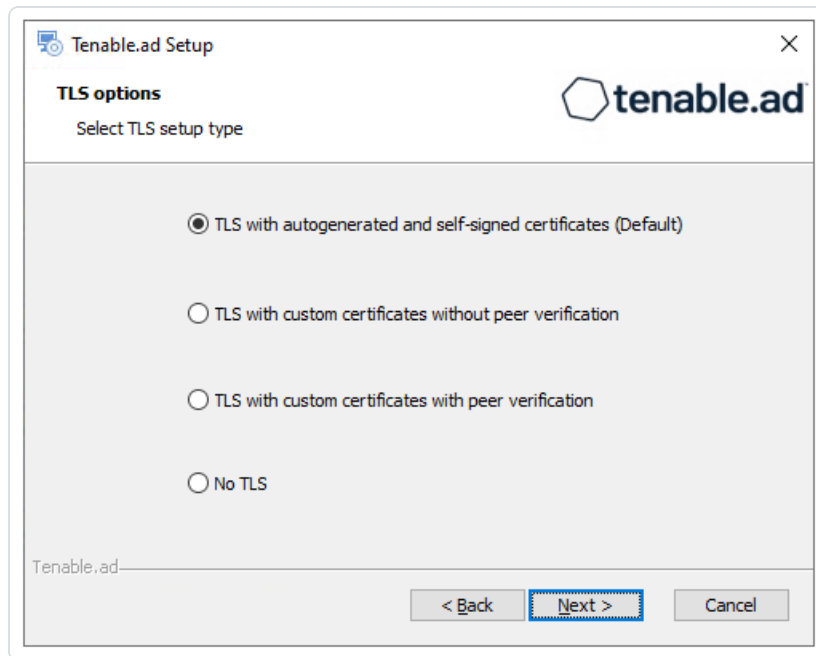

7. Click **Next**.

The **Security Engine Node** window appears.

8. In the **IP** box for RabbitMQ, the installer shows the address or host name of the SEN machine based on your previous installation. Check that this information remains valid and correct if

necessary.

The screenshot shows the 'Tenable.ad Setup' window with the 'Security Engine Node' configuration. The window title is 'Tenable.ad Setup' and it features the Tenable.ad logo. Below the title, it says 'Security Engine Node' and 'Fill in relevant fields'. The configuration is organized into two columns: 'IP' and 'Port'. The 'RabbitMQ' row has IP '172.26.112.73' and Port '5671'. The 'Eridanis' row has IP '127.0.0.1' and Port '3000'. The 'Electra' row has IP '127.0.0.1' and Port '3002'. The 'Enif' row has IP '127.0.0.1' and Port '3003'. The 'Attack Path' row has IP '127.0.0.1' and Port '4242'. Below this table, there is a 'Kapteyn' section with a 'DNS name or IP' field. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

9. Click **Next**.

The **Directory Listener** window appears.


10. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

The screenshot shows the 'Tenable.ad Setup' window with the 'Directory Listener' configuration. The window title is 'Tenable.ad Setup' and it features the Tenable.ad logo. Below the title, it says 'Directory Listener' and 'Fill in relevant fields'. There is a text box for 'Subnets separated by a comma (example: 192.168.1.1/32,192.168.1.3/32)' containing the text '0.0.0.0/0'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.


11. Click **Next**.



The **Ready to Install** window appears.

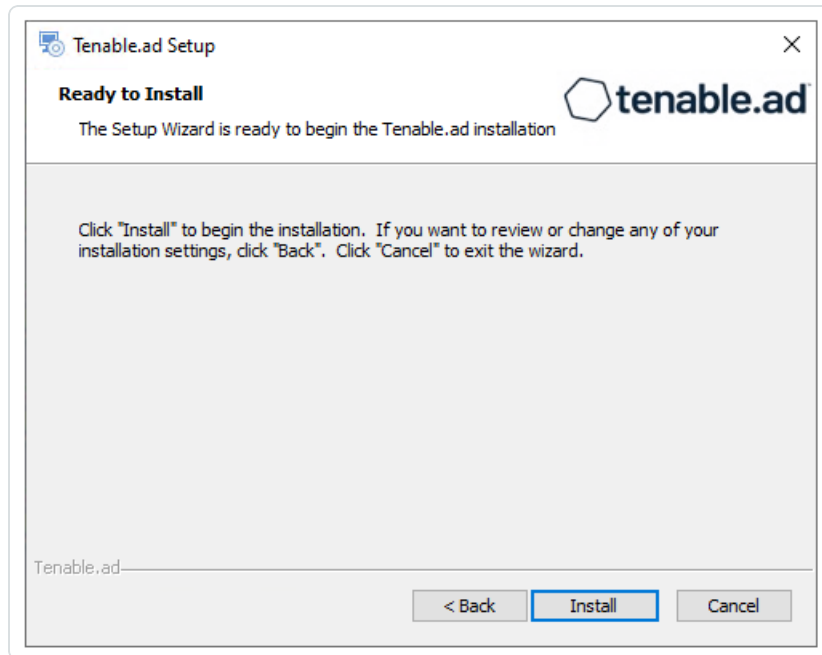

12. Click **Install** to begin the upgrade.

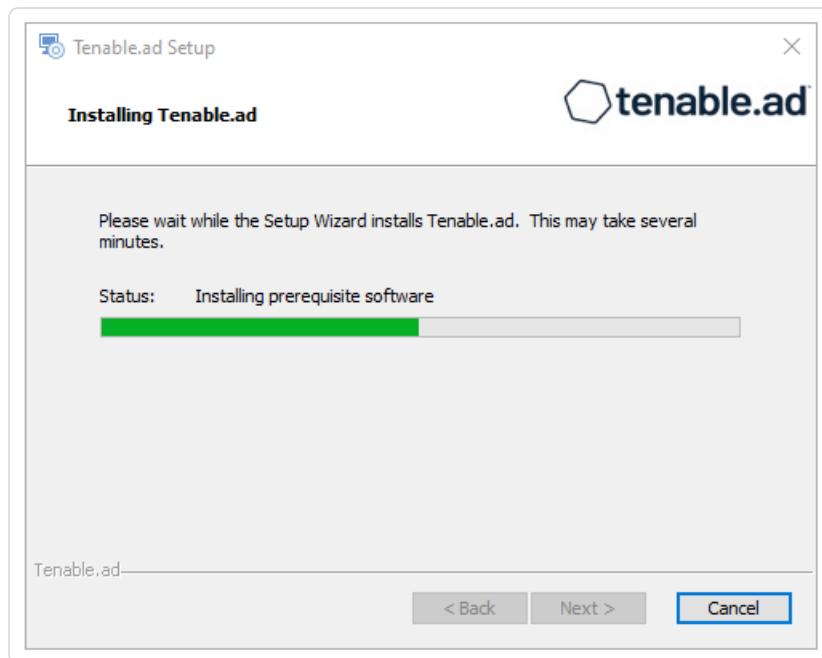

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

13. Click **Finish**.

A dialog box asks you to restart your machine.



14. Click **No**.

Caution: Do NOT reboot the machine now.


15. Upgrade the Security Engine Node (SEN).

To upgrade the SEN with default TLS using the "Expert Mode":

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

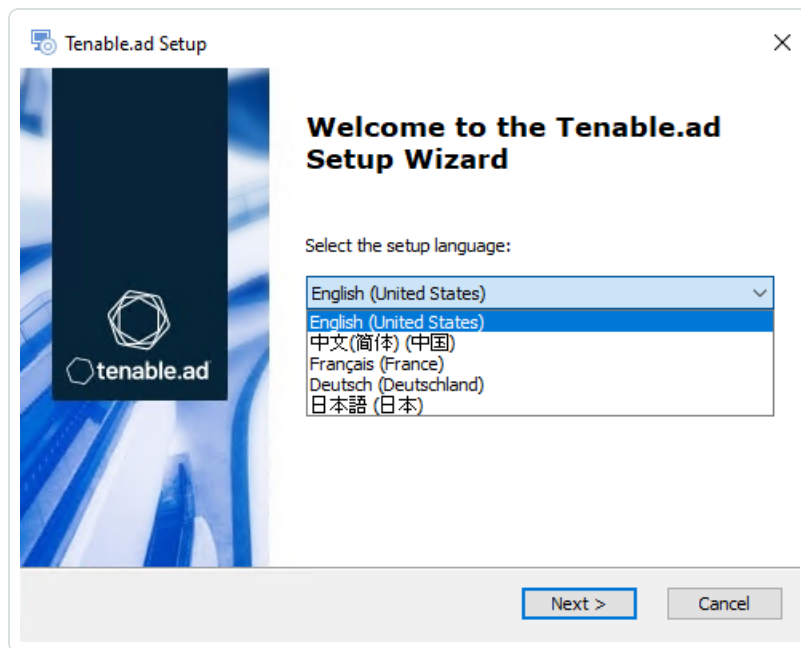


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

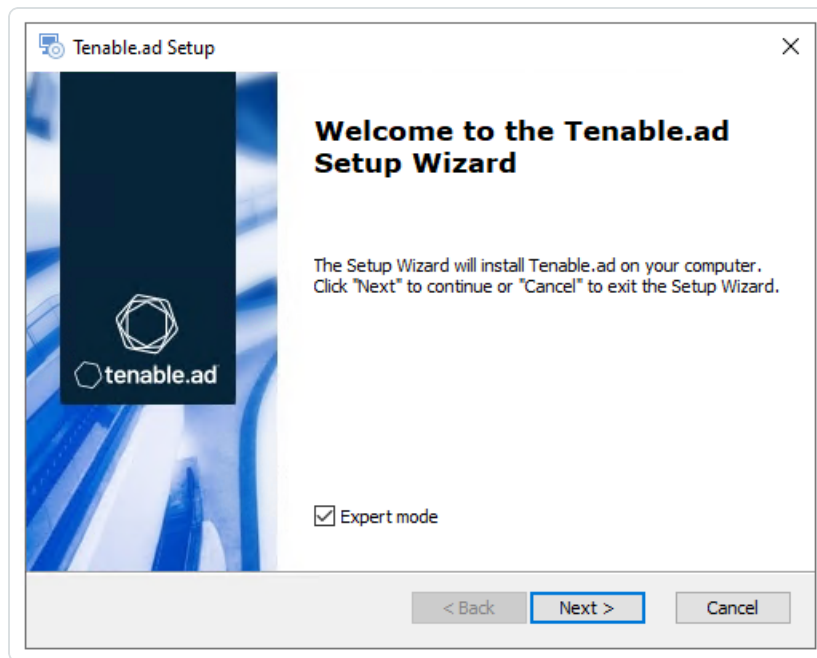

4. Click **Next**.


The **Custom Setup** window appears.

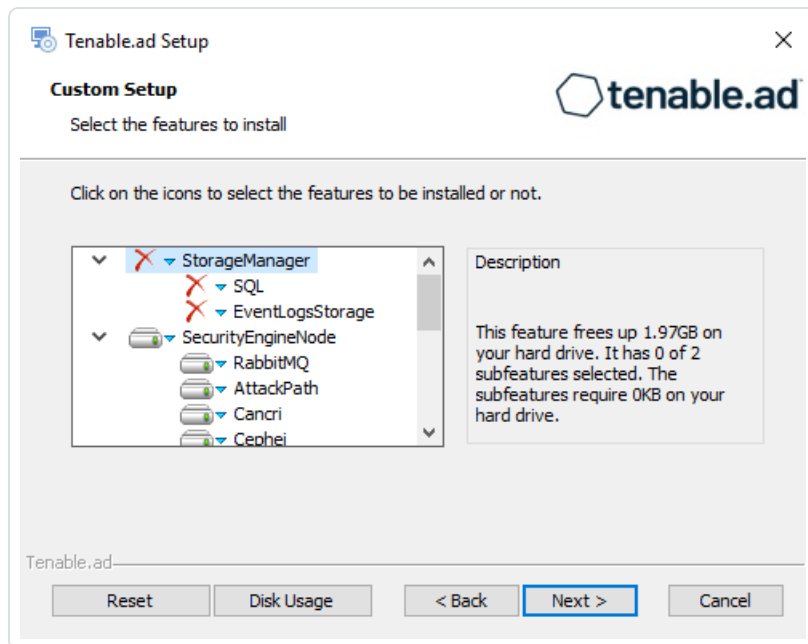

5. The installation program automatically preselects the SEN component based on your previous installation. Click **Next**.

The **TLS Options** window appears.

6. Select the **TLS with autogenerated and self-signed certificates (Default)** option.

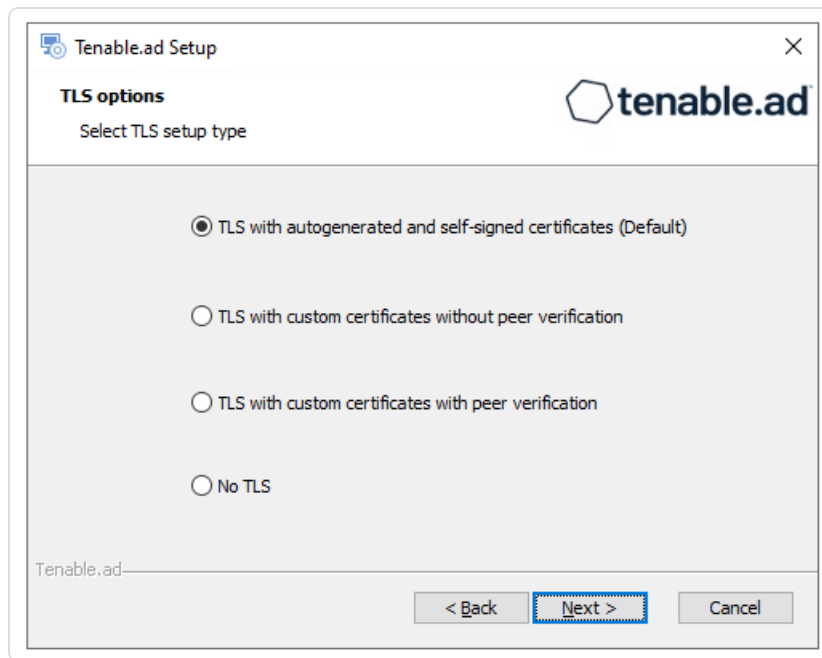

7. Click **Next**.

The **Storage Manager** window appears.

8. Verify or enter the following information:

- In the **IP** box, check that your MSSQL database's IP address from your previous installation remains valid and correct it if necessary.
- In the **Event Logs Storage** box, type the IP address of the machine storing your event logs. This address is typically the same as the MSSQL database IP address.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager

Fill in relevant fields

MSSQL

IP: 10.0.49.34

Port: 1433

Password:

Instance Name: []

SQL UserDB Disk: []

SQL UserDB Log Disk: []

SQL TempDB Disk: []

Event Logs Storage

IP: 10.0.49.34

Port: 4244

Tenable.ad

< Back Next > Cancel

Caution: Remember to update the Event Logs Storage IP or host name address during this step. Failing to do so leads to attack detection issues. If you have successfully completed this screen and upgraded the SEN, you must update the environment variables for `ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host` and `ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host` from the **current value** to the accurate value for **<Storage Manager host name or IP address>**. For more information, see the [Troubleshooting knowledge base article](#).

9. Click **Next**.

The **Security Engine Node** window appears.

10. In the **DNS name or IP** box, the installer shows the DNS name (preferred) or IP address of the web server that end users type to access Tenable Identity Exposure from your previous installation. Check that this remains valid and correct if necessary.

Tenable.ad Setup ✕

Security Engine Node

Fill in relevant fields

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

Kapteyn DNS name or IP

172.26.112.73

Tenable.ad _____

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

11. Click **Next**.

The **Ready to Install** window appears.

Tenable.ad Setup ✕

Ready to Install


The Setup Wizard is ready to begin the Tenable.ad installation

Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.

Tenable.ad _____



12. Click **Install** to begin the upgrade.

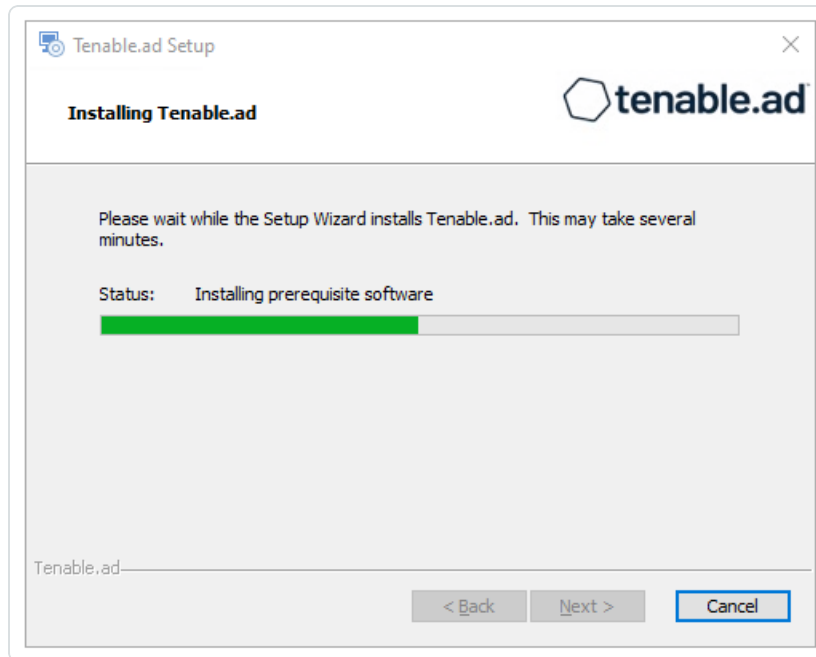

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

13. Click **Finish**.

A dialog box asks you to restart your machine.

14. Click **No**.

Caution: Do NOT reboot the server now.


15. Upgrade the Storage Manager.

To upgrade the Storage Manager with default TLS using the "Expert Mode":

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

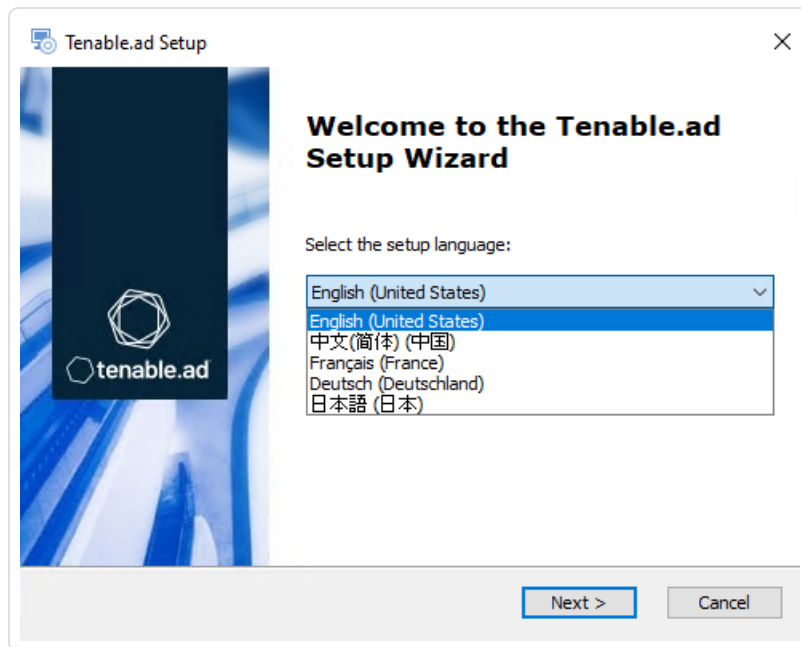


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

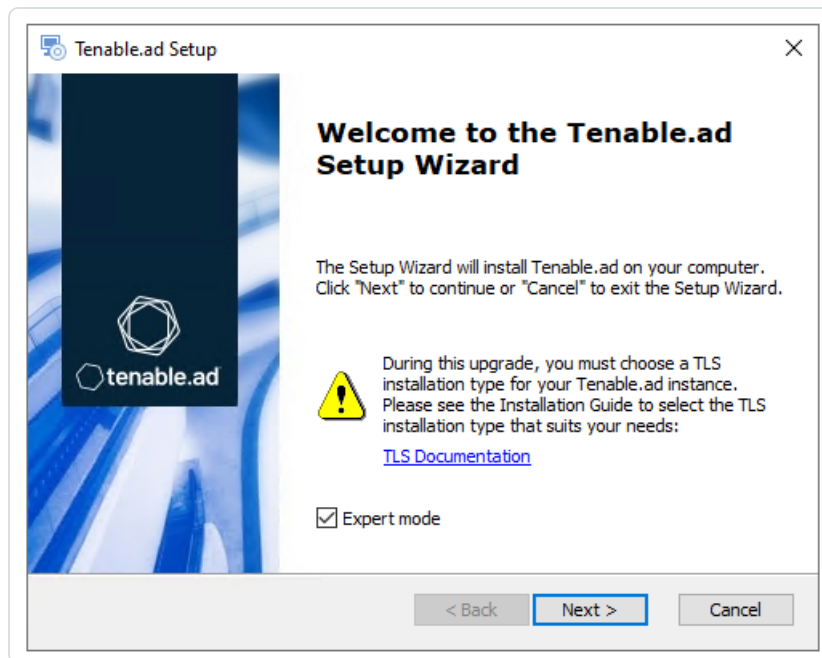


4. Click **Next**.

The **Custom Setup** window appears.

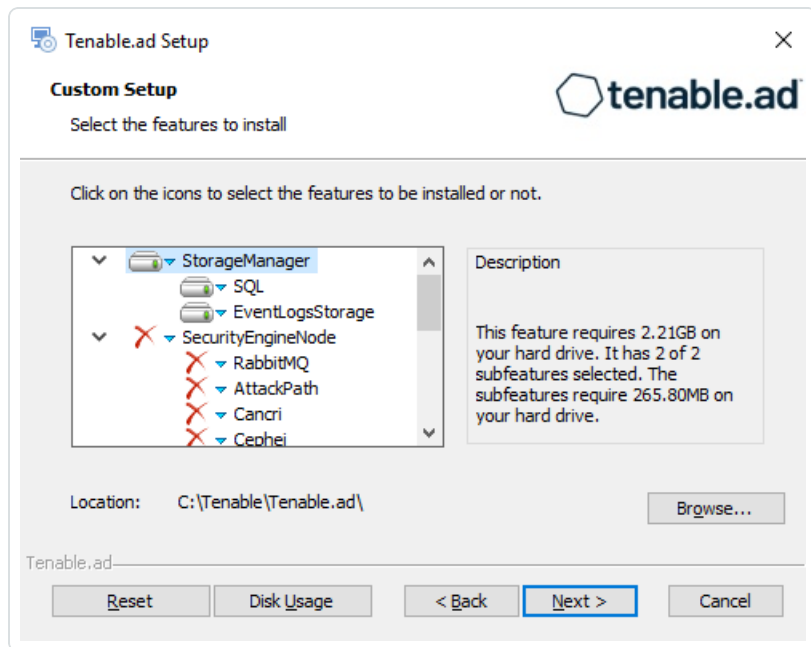

5. The installation program automatically preselects the Storage Manager component based on the previous installation. Click **Next**.
6. (Optional) Click **Browse** to change the installation folder location. Change only the drive letter. The **TLS Options** window appears.
7. Select the **TLS with autogenerated and self-signed certificates (Default)** option.

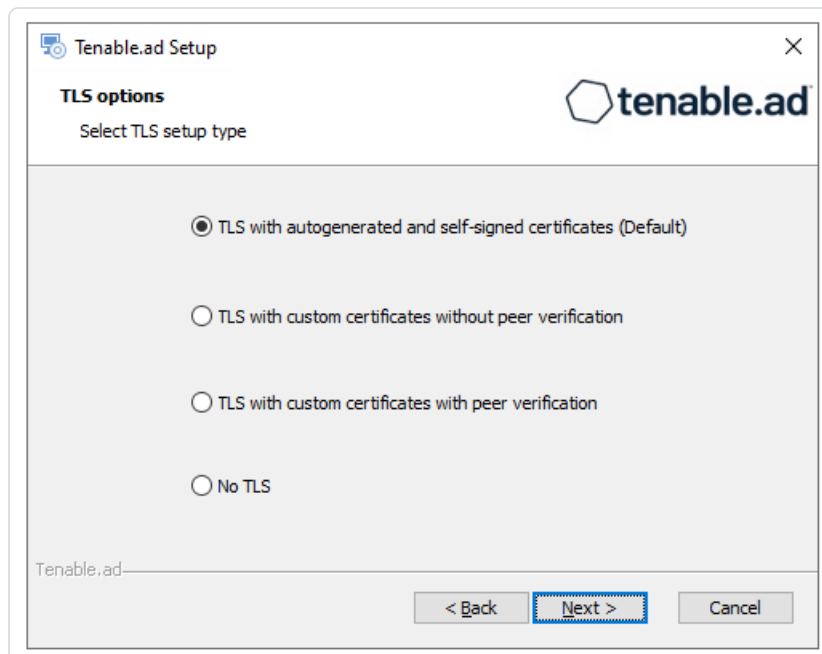

8. Click **Next**.



The **Storage Manager** window appears.

9. The installer reuses the information from your previous installation. Click **Next**.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.


MSSQL		Event Logs Storage	
IP	10.0.49.34	IP	10.0.49.34
Port	1433	Port	4244
Password		
Instance Name	TENABLE		
SQL UserDB Disk	C:\		
SQL UserDB Log Disk	E:\		
SQL TempDB Disk	F:\		

10. Click **Next**.

The **Ready to Install** window appears.



11. Click **Install** to begin the upgrade.

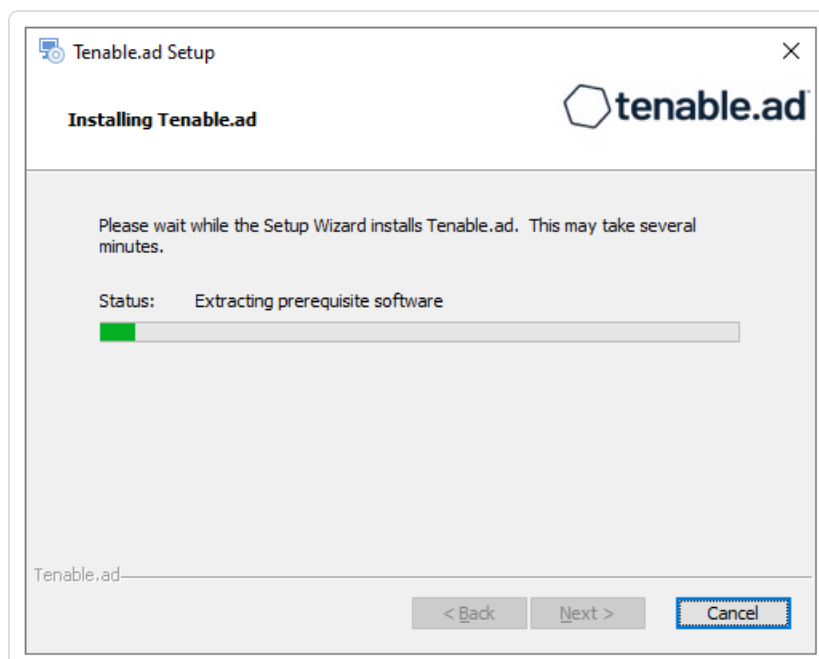

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

12. Click **Finish**.

A dialog box asks you to restart your machine.

13. Click **Yes**.



The machine restarts.

14. [Restart Services.](#)

See also

- [HTTPS for Tenable Identity Exposure Web Application](#)

Upgrade with TLS without Peer Verification

Required User Role: Administrator on the local machine

This process upgrades the following Tenable Identity Exposure components with custom TLS and without peer verification. It requires the "Expert mode" setting in the installation wizard.

Order of Upgrade

Upgrade the components in the following order:

1. [Directory Listener](#)
2. [Security Engine Node](#)
3. [Storage Manager](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

Note: Restart your machine **before** each upgrade.

After you upgrade the components, restart the machines in the following order:

1. Storage Manager
2. Security Engine Node
3. Directory Listener


To upgrade the Directory Listener with custom TLS and without peer verification:



1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

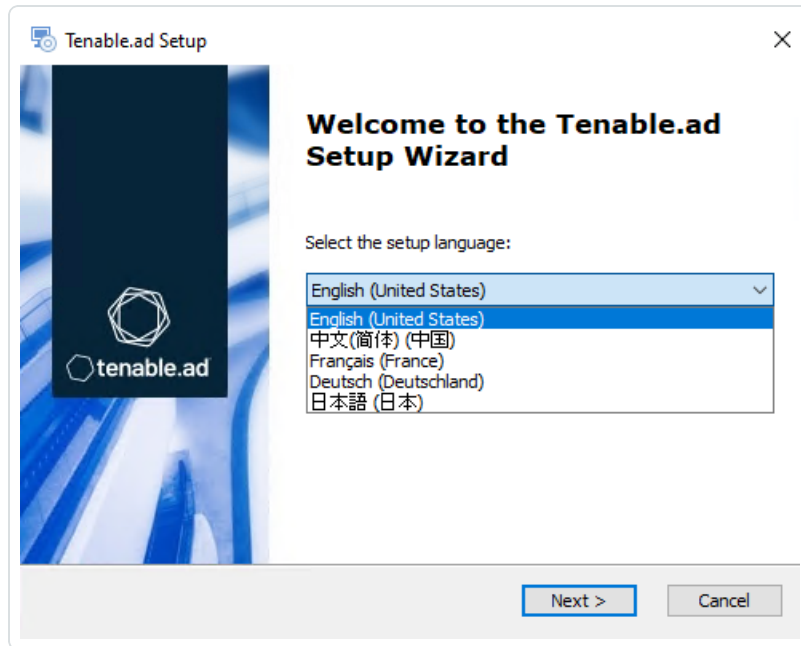


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

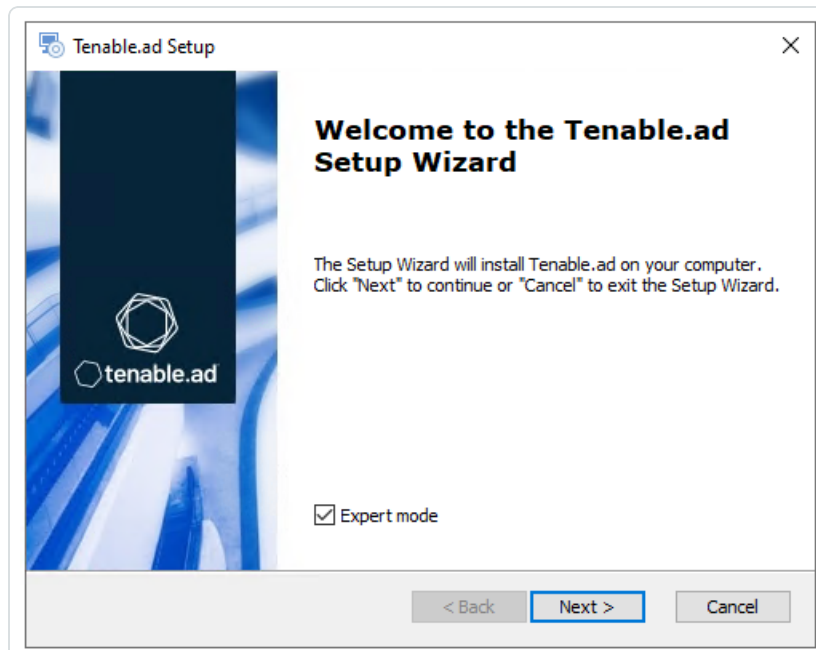

4. Click **Next**.


The **Custom Setup** window appears.

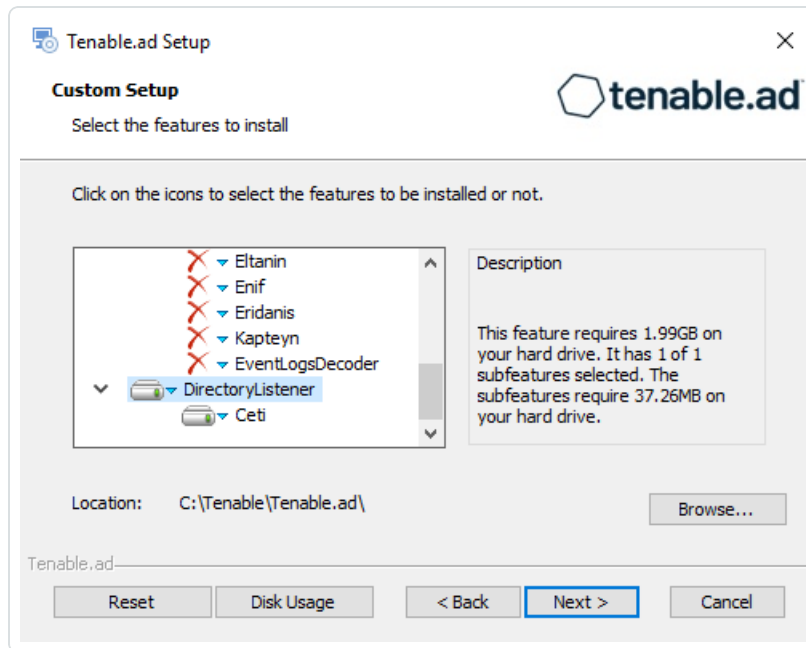

5. The installation program automatically preselects the Directory Listener component based on the previous installation. Click **Next**.

The **TLS Options** window appears.


6. Select the **TLS with custom certificates without peer verification** option.

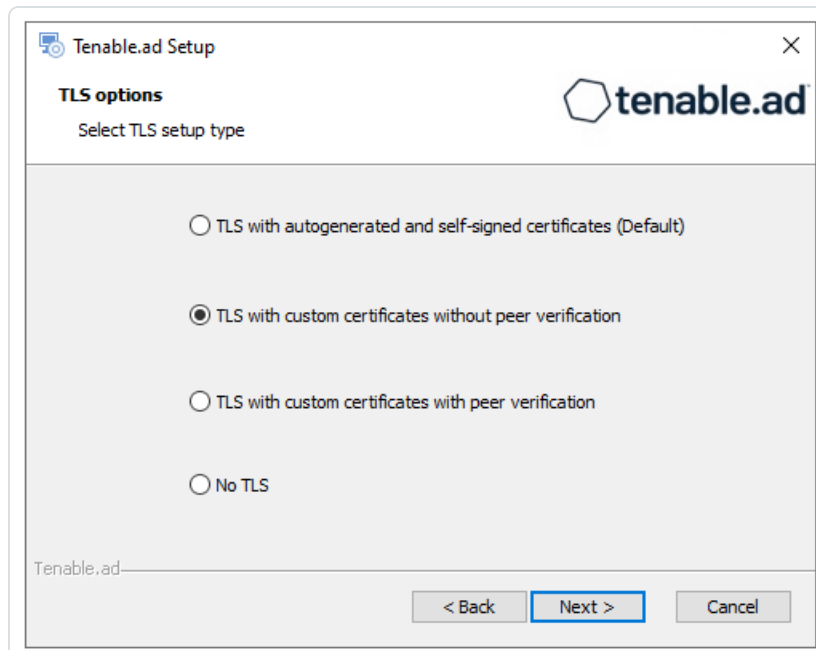



7. Click **Next**.


The **TLS certificates** window appears.

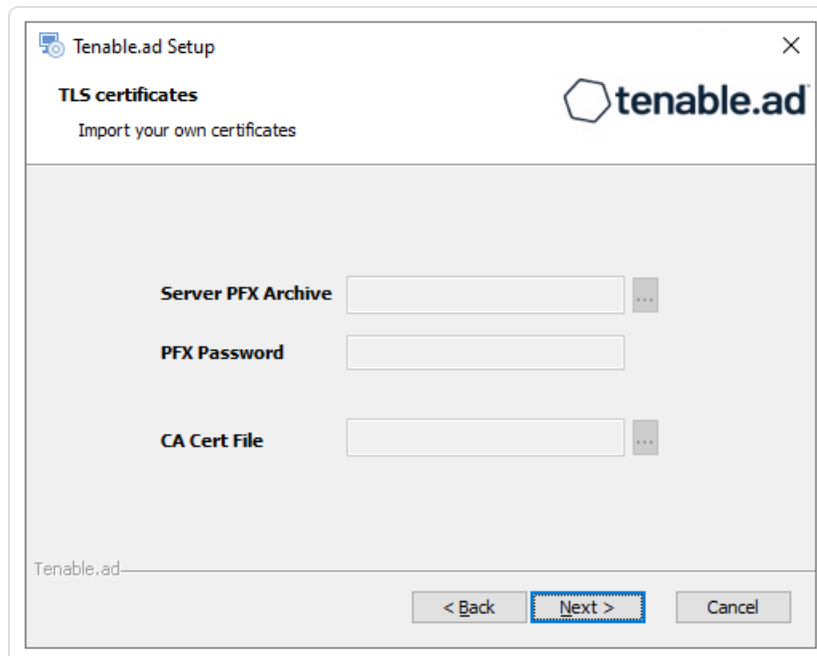

8. Nothing is required in this screen. Click **Next**.

The **Security Engine Node** window appears.


9. In the **IP** box for RabbitMQ, the installer shows the address or host name of the SEN machine based on your previous installation. Check that this information remains valid and correct if necessary.

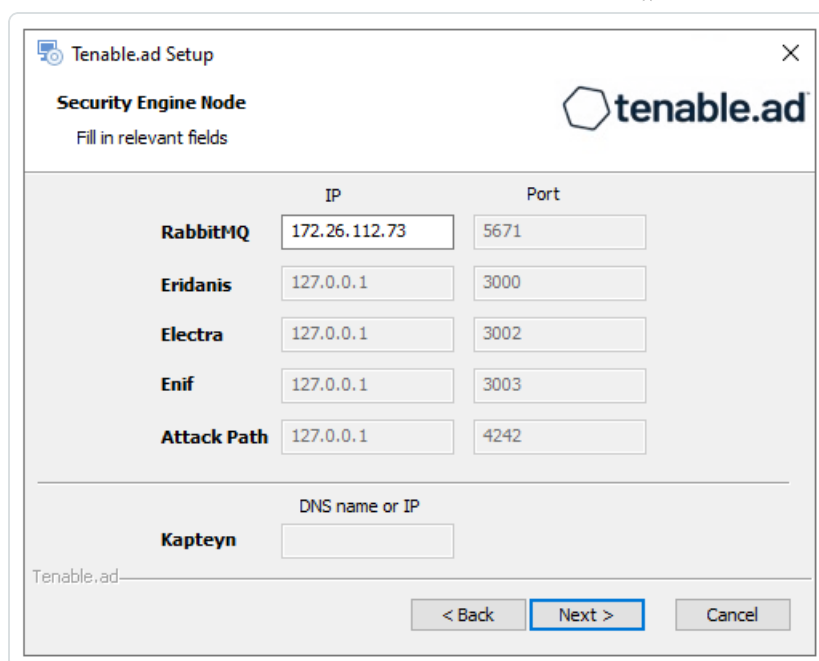

10. Click **Next**.


The **Directory Listener** window appears.

11. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

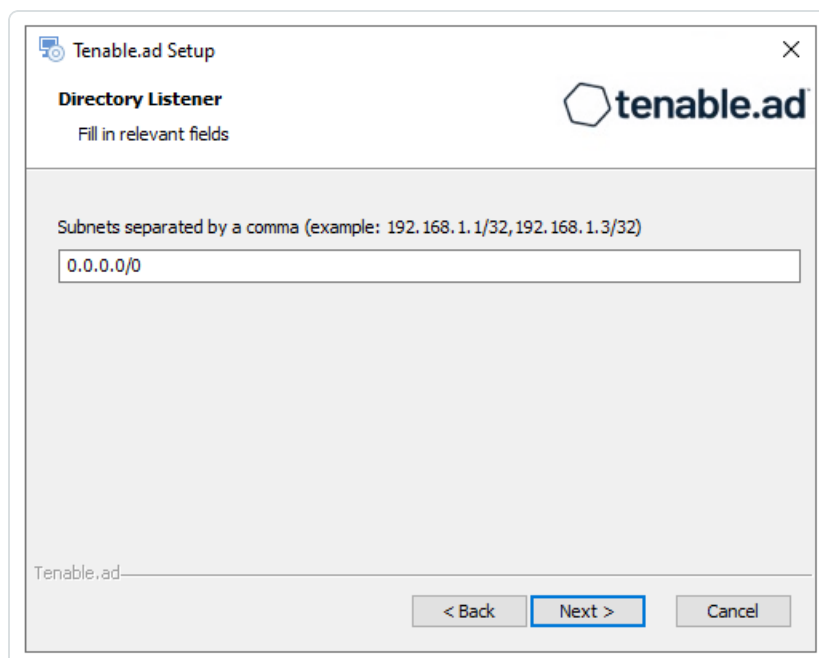


12. Click **Next**.

The **Ready to Install** window appears.

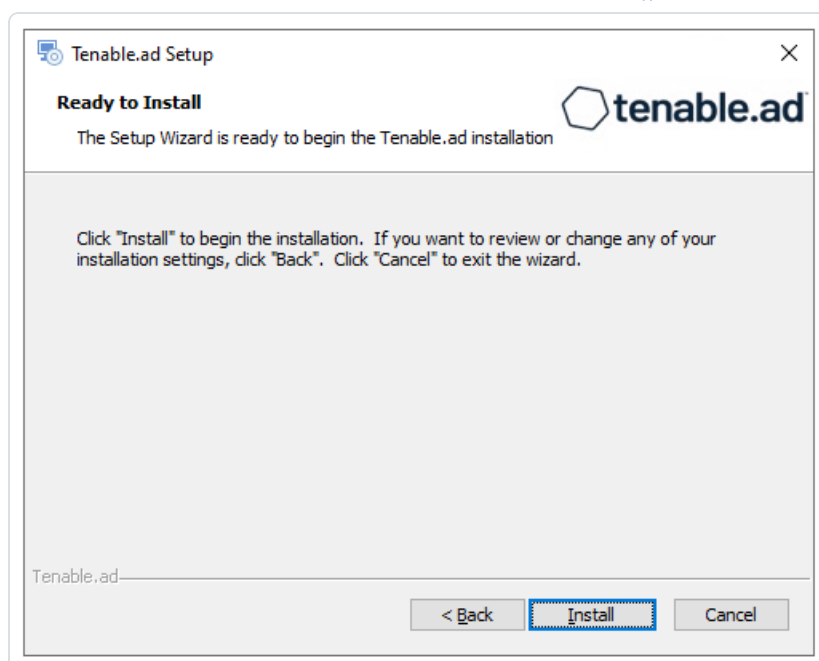

13. Click **Install** to begin the upgrade.

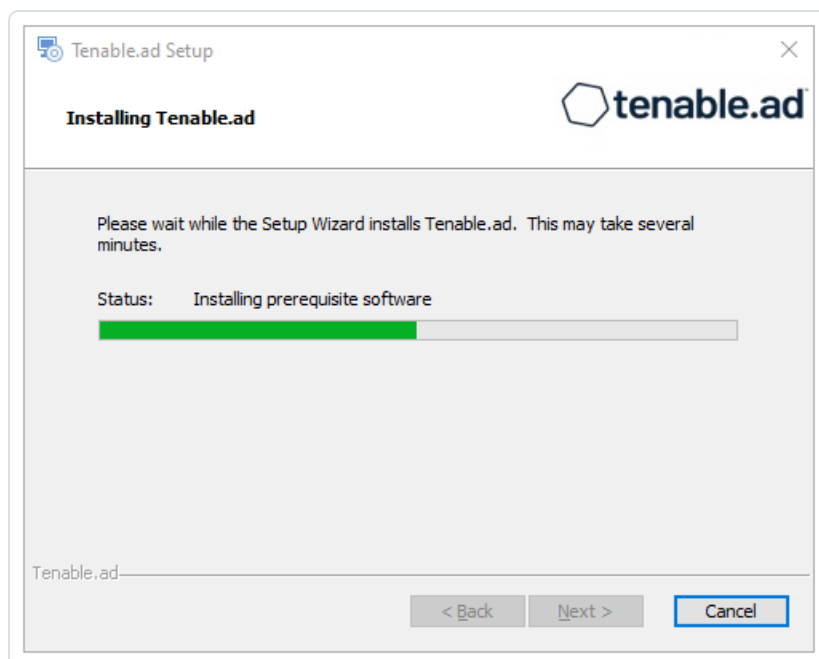

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **No**.



Caution: Do NOT reboot the server now.


16. Upgrade the Security Engine Node (SEN).

To upgrade the SEN with custom TLS and without peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

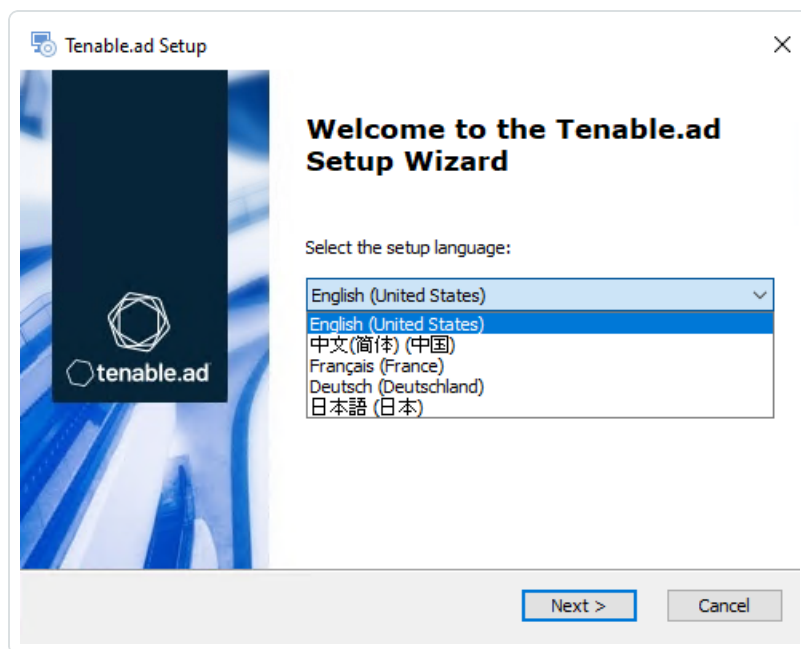


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

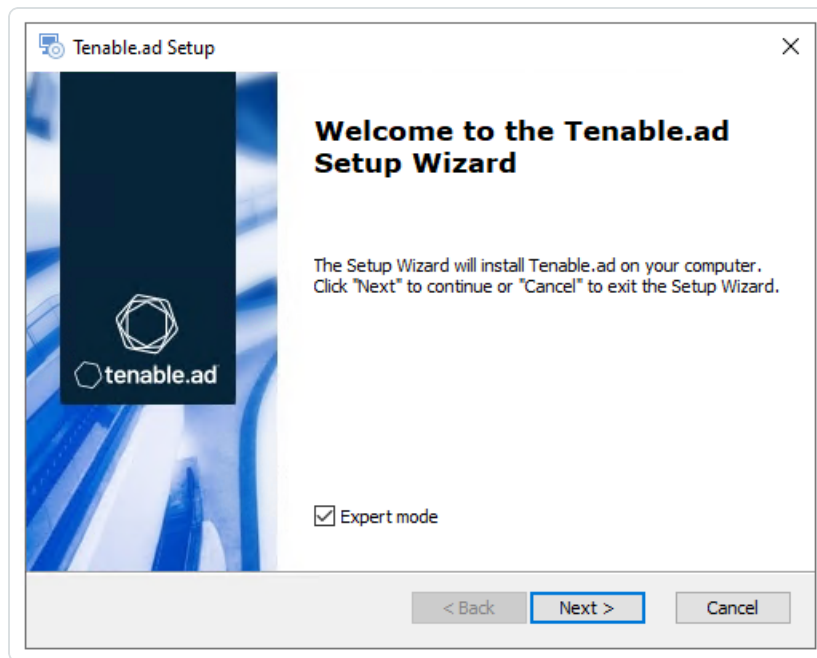

4. Click **Next**.


The **Custom Setup** window appears.

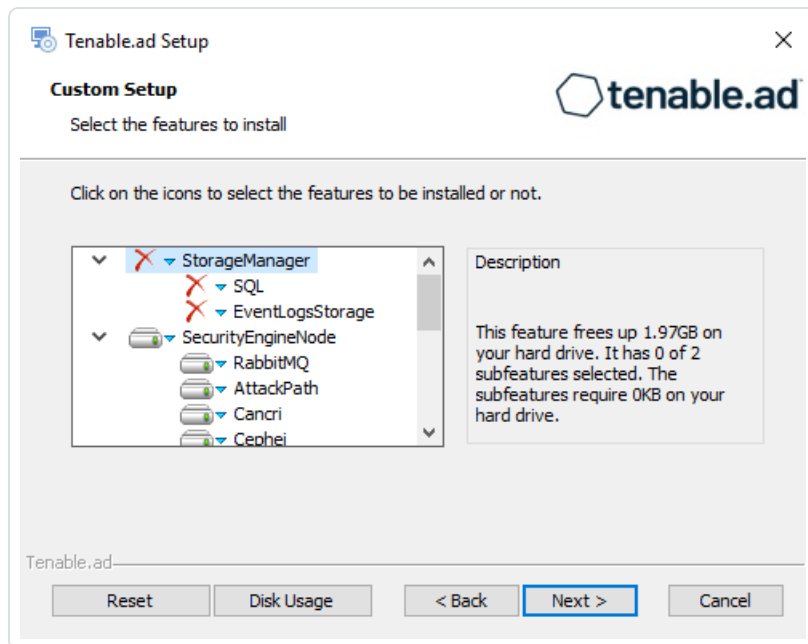

5. The installation program automatically preselects the **Security Engine Node** feature based on the previous installation. Click **Next**.

The **TLS Options** window appears.

6. Select the **TLS with custom certificates without peer verification** option.

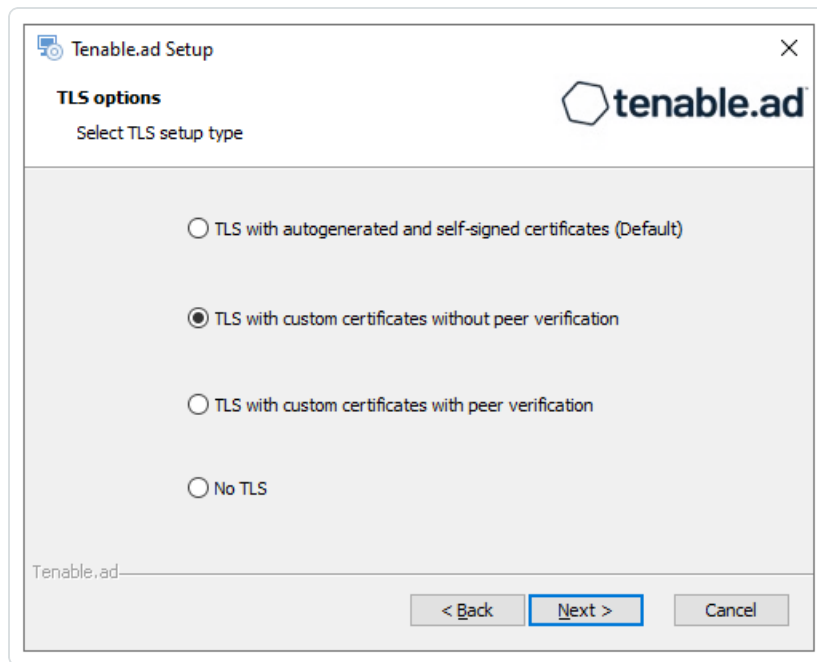


Caution: Remember to update the Event Logs Storage IP or host name address during this step. Failing to do so leads to attack detection issues. If you have successfully completed this screen and upgraded the SEN, you must update the environment variables for `ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host` and `ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host` from the **current value** to the accurate value for **<Storage Manager host name or IP address>**. For more information, see the [Troubleshooting knowledge base article](#).

7. Click **Next**.

The **TLS certificates** window appears.

8. Provide the following information:

- In the **Server PFX Archive** box, click ... to browse to your PFX archive.
- In the **PFX Password** box, type the password for the PFX file.
- In the **CA Cert File** box, click ... to browse to your CA certificate file.

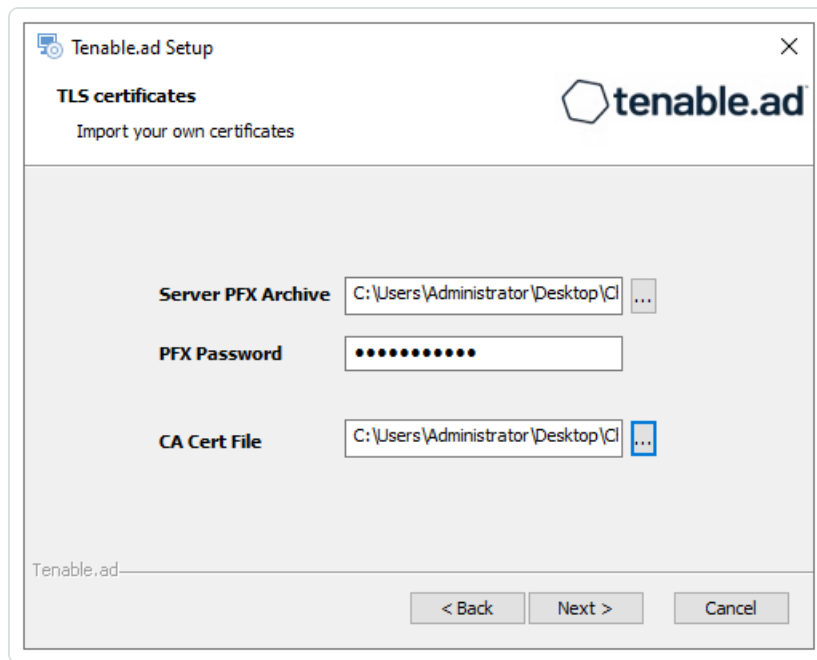

9. Click **Next**.

The **Storage Manager** window appears.

10. The installer shows the IP address or host name of your MSSQL database from your previous installation. Check that it remains valid and correct if necessary. Click **Next**.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager

Fill in relevant fields

tenable.ad

MSSQL		Event Logs Storage	
IP	10.0.49.34	IP	10.0.49.34
Port	1433	Port	4244
Password	••••••••		
Instance Name			
SQL UserDB Disk			
SQL UserDB Log Disk			
SQL TempDB Disk			

Tenable.ad

< Back Next > Cancel

Caution: Remember to update the Event Logs Storage IP or host name address during this step. Failing to do so leads to attack detection issues. If you have successfully completed this screen and upgraded the SEN, you must update the environment variables for `ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host` and `ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host` from the **current value** to the accurate value for **<Storage Manager host name or IP address>**. For more information, see the [Troubleshooting knowledge base article](#).

11. Click **Next**.

The **Security Engine Node** window appears.

12. In the **DNS name or IP** box, the installer shows the IP address of the web server that end users type to access Tenable Identity Exposure from your previous installation. Check that this remains valid and correct if necessary.

The screenshot shows the 'Tenable.ad Setup' window for the 'Security Engine Node'. It contains a table for configuring services and a field for the DNS name or IP.

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

Below the table, there is a field for 'DNS name or IP' with the value '172.26.112.73' entered for 'Kapteyn'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

13. Click **Next**.

The **Ready to Install** window appears.

The screenshot shows the 'Tenable.ad Setup' window at the 'Ready to Install' stage. It contains the following text:


Ready to Install
The Setup Wizard is ready to begin the Tenable.ad installation

Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.

At the bottom, there are three buttons: '< Back', 'Install', and 'Cancel'. The 'Install' button is highlighted with a blue border.



14. Click **Install** to begin the upgrade.

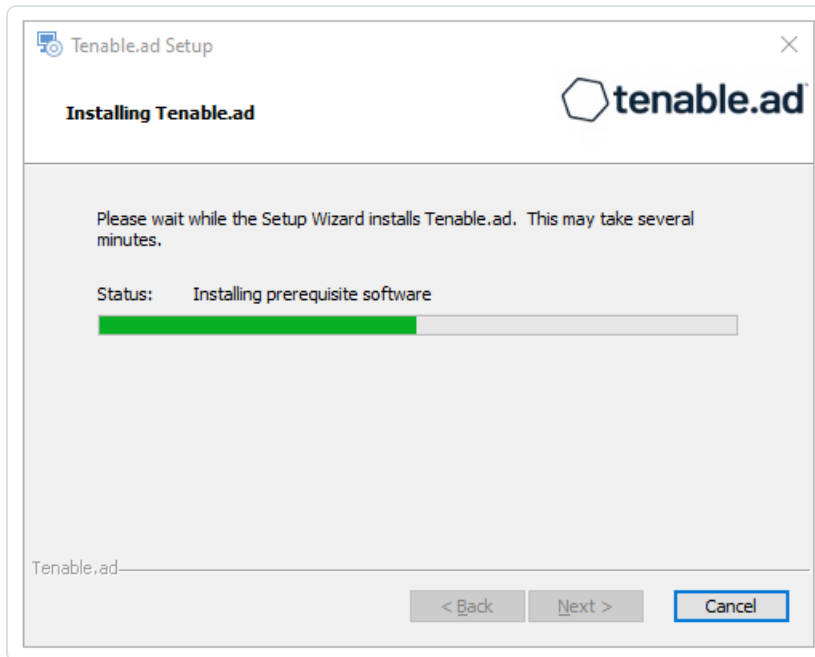

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

15. Click **Finish**.

A dialog box asks you to restart your machine.

16. Click **No**.

Caution: Do NOT reboot the server now.


17. Upgrade the Storage Manager.

To upgrade the Storage Manager with custom TLS and without peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

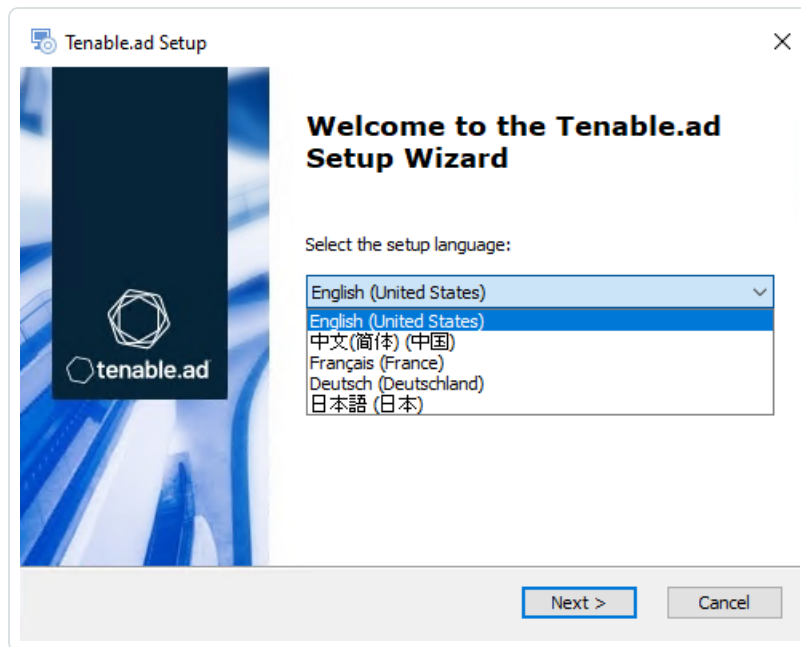


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

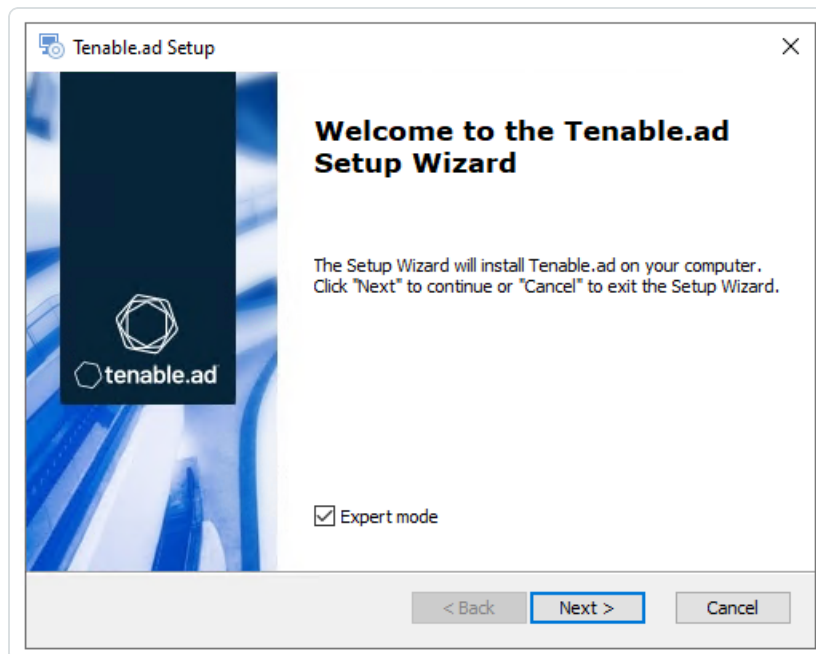


4. Click **Next**.

The **Custom Setup** window appears.

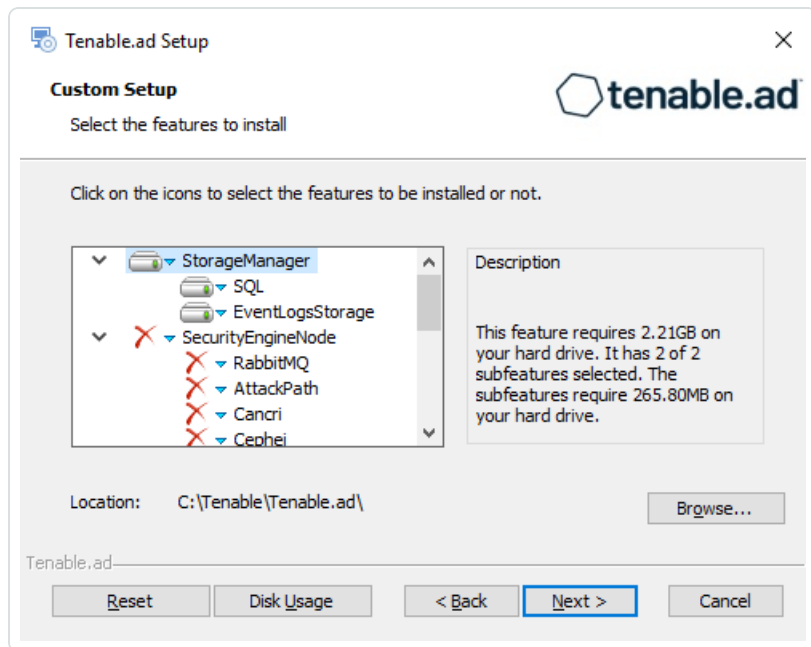

5. The installation program automatically preselects the Storage Manager component based on the previous installation. Click **Next**.
6. (Optional) Click **Browse** to change the installation folder location. Change only the drive letter. The **TLS Options** window appears.
7. Select the **TLS with custom certificates without peer verification** option.

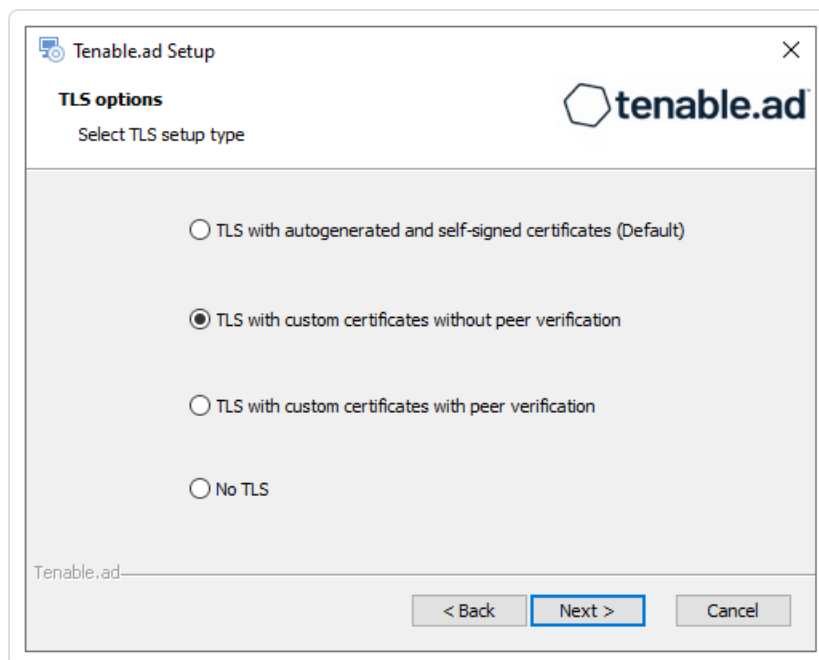


8. Click **Next**.



The **TLS certificates** window appears.

9. Provide the following information:
 - In the **Server PFX Archive** box, click ... to browse to your PFX archive.
 - In the **PFX Password** box, type the password for the PFX file.

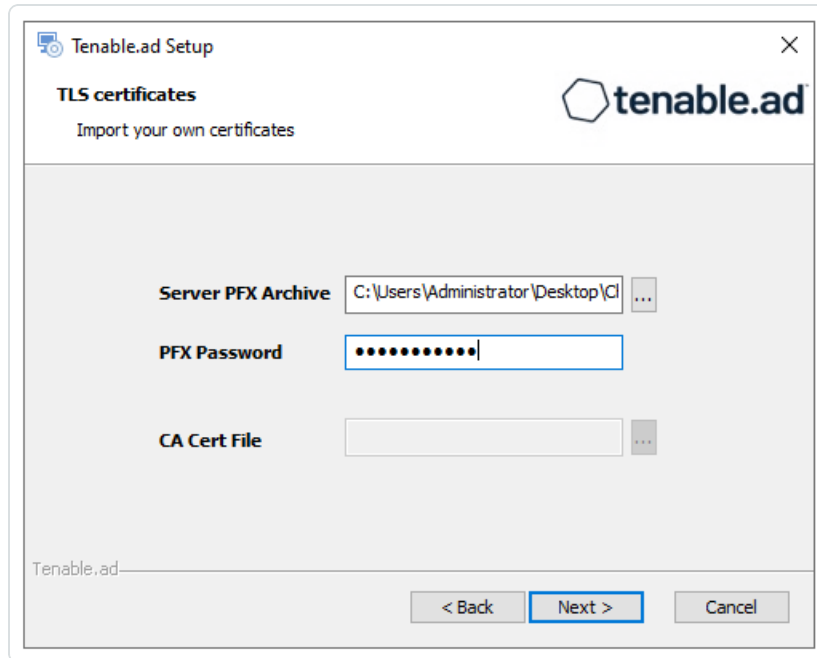

10. Click **Next**.

The **Storage Manager** window appears.

11. The installer reuses the information from your previous installation. Click **Next**

Note: If you change the SA password since the previous installation, the installer requires it to follow the

syntax described in [Strong Passwords](#) for the SQL Server.

The screenshot shows the 'Storage Manager' window in the Tenable.ad Setup wizard. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Storage Manager' and 'Fill in relevant fields'. The window is divided into two columns: 'MSSQL' and 'Event Logs Storage'. The 'MSSQL' column has fields for IP (10.0.49.34), Port (1433), Password (masked with dots), Instance Name (TENABLE), SQL UserDB Disk (C:\), SQL UserDB Log Disk (E:\), and SQL TempDB Disk (F:\). The 'Event Logs Storage' column has fields for IP (10.0.49.34) and Port (4244). At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.


12. Click **Next**.

The **Ready to Install** window appears.

The screenshot shows the 'Ready to Install' window in the Tenable.ad Setup wizard. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Ready to Install' and 'The Setup Wizard is ready to begin the Tenable.ad installation'. The main area contains the text: 'Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.' At the bottom, there are three buttons: '< Back', 'Install', and 'Cancel'. The 'Install' button is highlighted with a blue border.



13. Click **Install** to begin the upgrade.

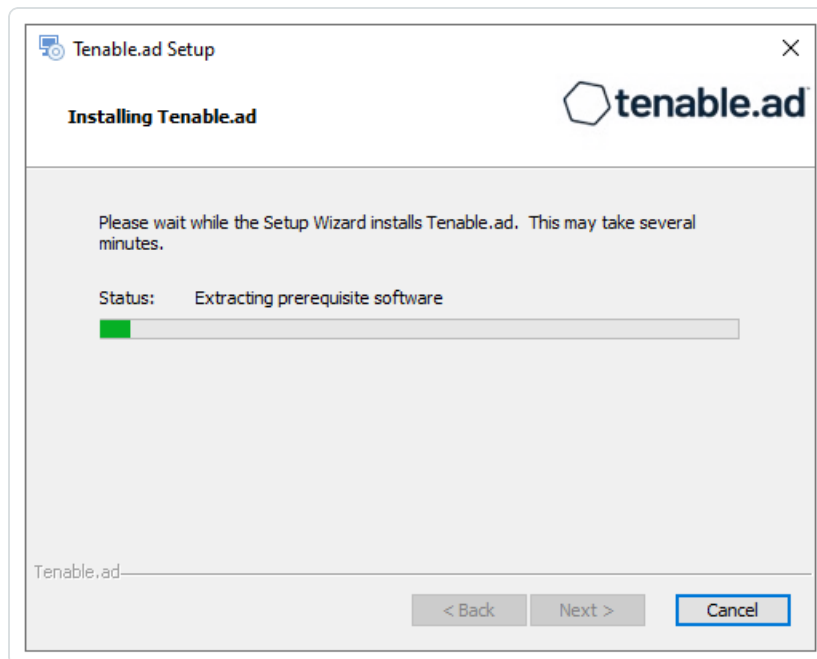

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **Yes**.

The machine restarts.

16. [Restart Services](#).


Upgrade with TLS and with Peer Verification

Required User Role: Administrator on the local machine

This process upgrades the following Tenable Identity Exposure components with custom TLS and with peer verification. It requires the "Expert mode" setting in the installation wizard.

Public Key Infrastructure (PKI) Certificate

To use peer verification, your PKI certificate must include the IP addresses or DNS of all the machines used to install Tenable Identity Exposure.

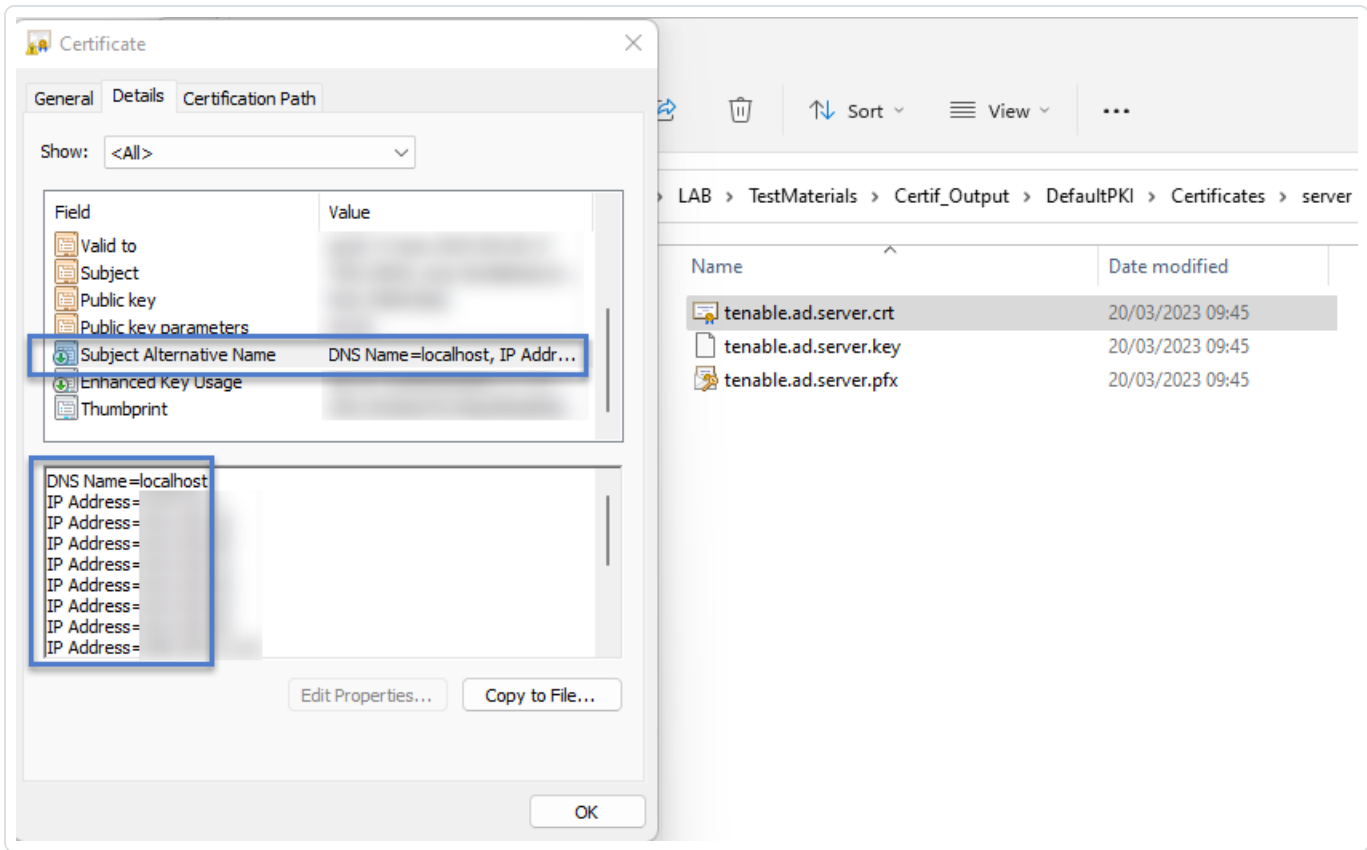

Upgrade the components in the following order:

1. [Directory Listener](#)
2. [Security Engine Node](#)
3. [Storage Manager](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

Note: Restart your machine **before** each upgrade.

After you upgrade the components, restart the machines in the following order:

1. Storage Manager
2. Security Engine Node
3. Directory Listener


To upgrade the Directory Listener with custom TLS and with peer verification:



1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

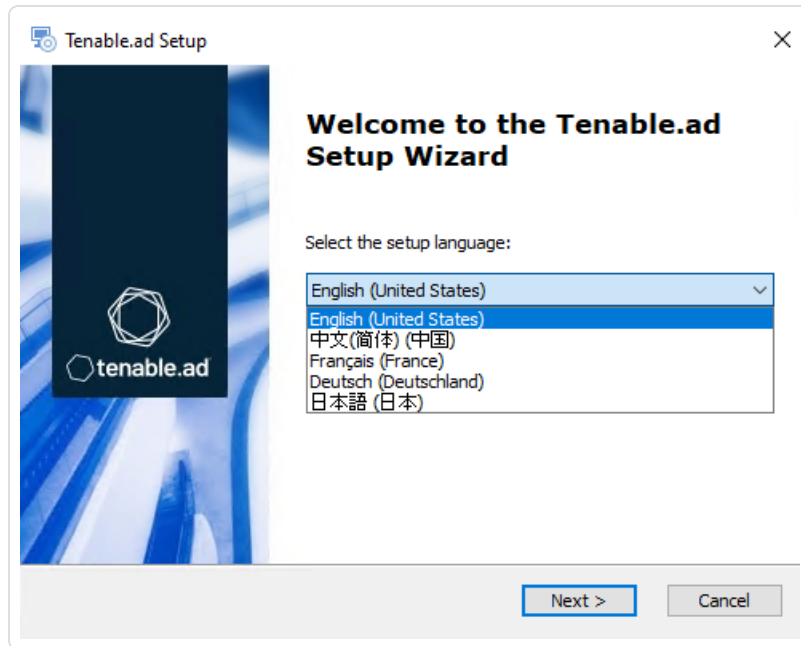

The **Setup Wizard** appears.


3. Select the **Expert Mode** checkbox.

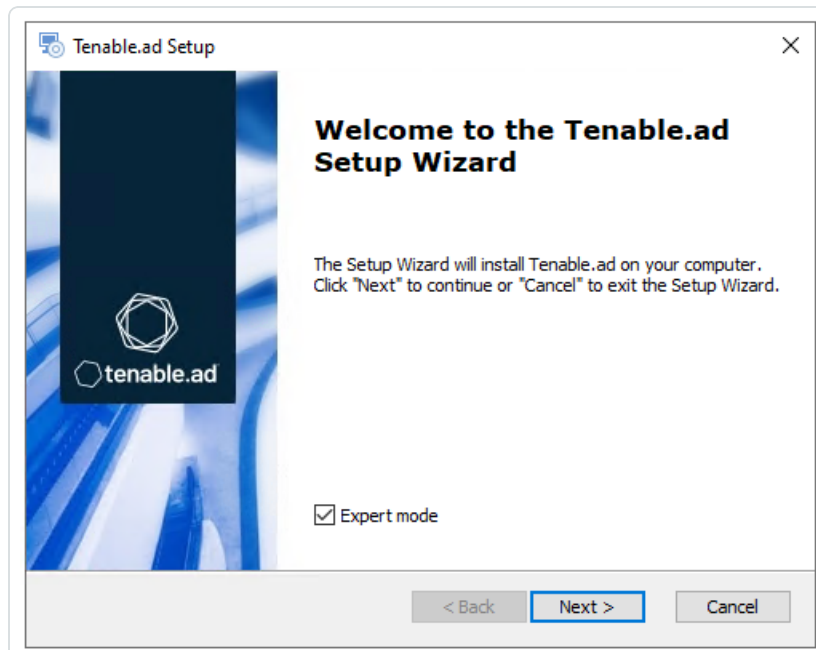



4. Click **Next**.


The **Custom Setup** window appears.

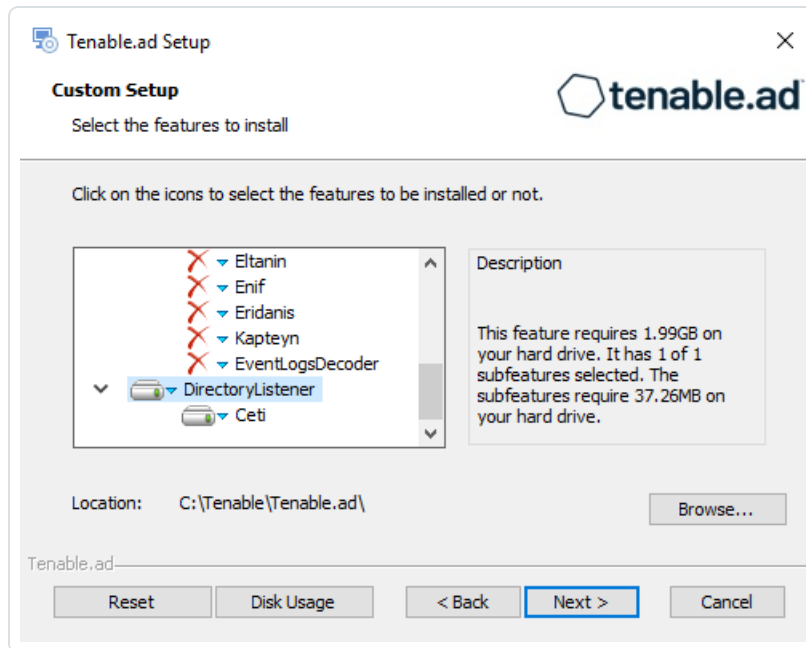

5. The installation program automatically preselects the Directory Listener component based on the previous installation. Click **Next**.


The **TLS Options** window appears.

6. Select the **TLS with custom certificates with peer verification** option.

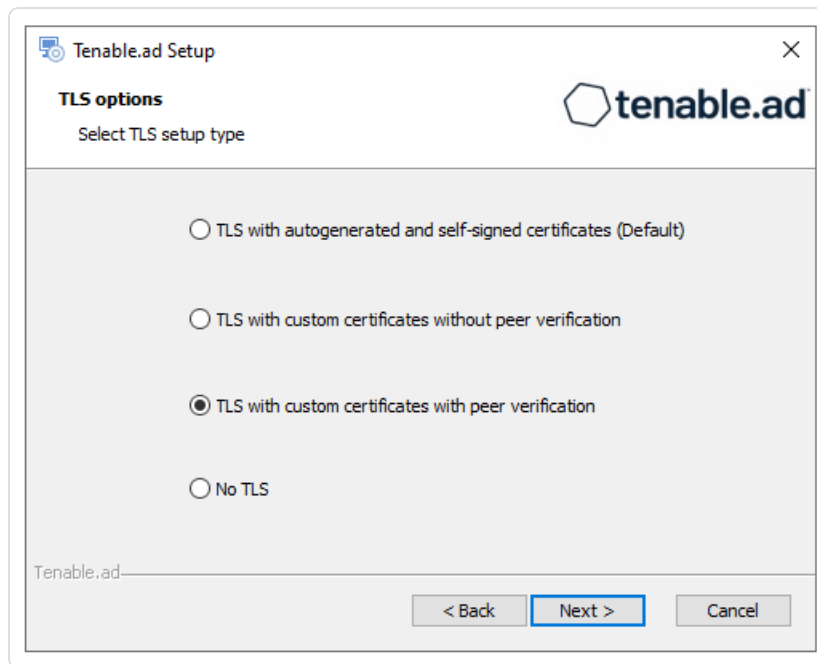

7. Click **Next**.

The **TLS certificates** window appears.

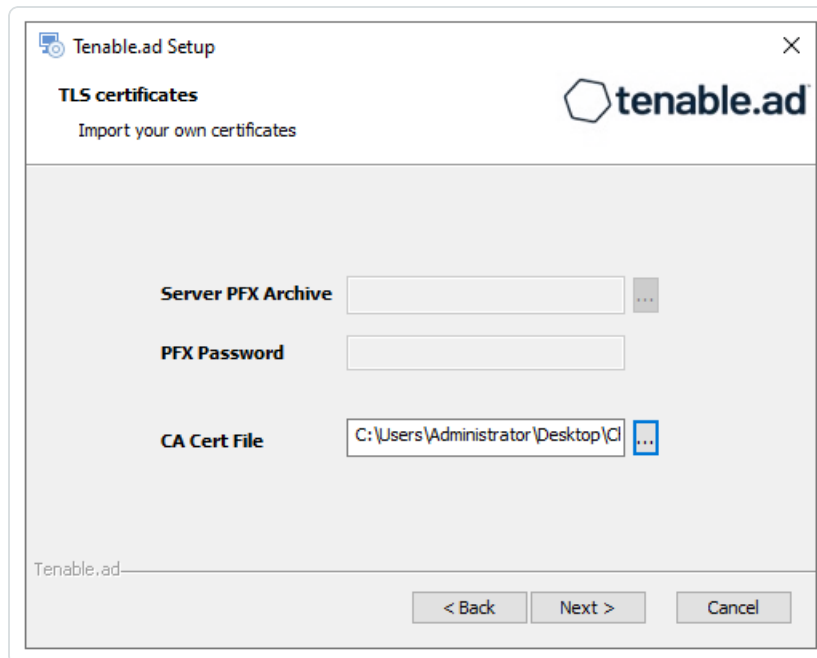

8. In the **CA Cert File** box, click ... to browse to your CA certificate file.

9. Click **Next**.

The **Security Engine Node** window appears.



10. In the **IP** box for RabbitMQ, the installer shows the address of the SEN machine based on your previous installation. Check that this information remains valid and correct it if necessary.

	IP	Port
RabbitMQ	172.26.112.73	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

DNS name or IP

Kapteyn

Tenable.ad

< Back Next > Cancel

11. Click **Next**.

The **Directory Listener** window appears.

12. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

Subnets separated by a comma (example: 192.168.1.1/32,192.168.1.3/32)


Tenable.ad

< Back Next > Cancel




13. Click **Next**.

The **Ready to Install** window appears.

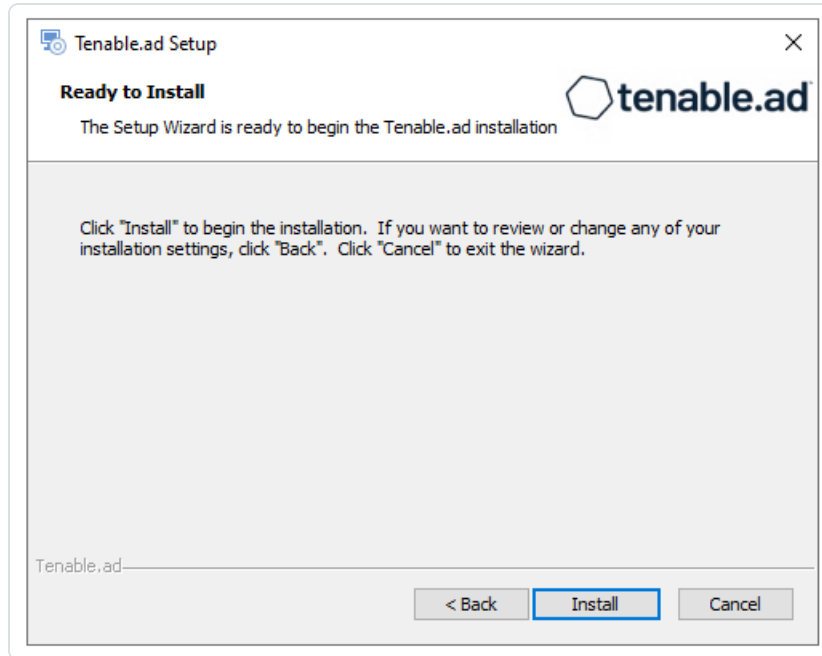

14. Click **Install** to begin the upgrade.

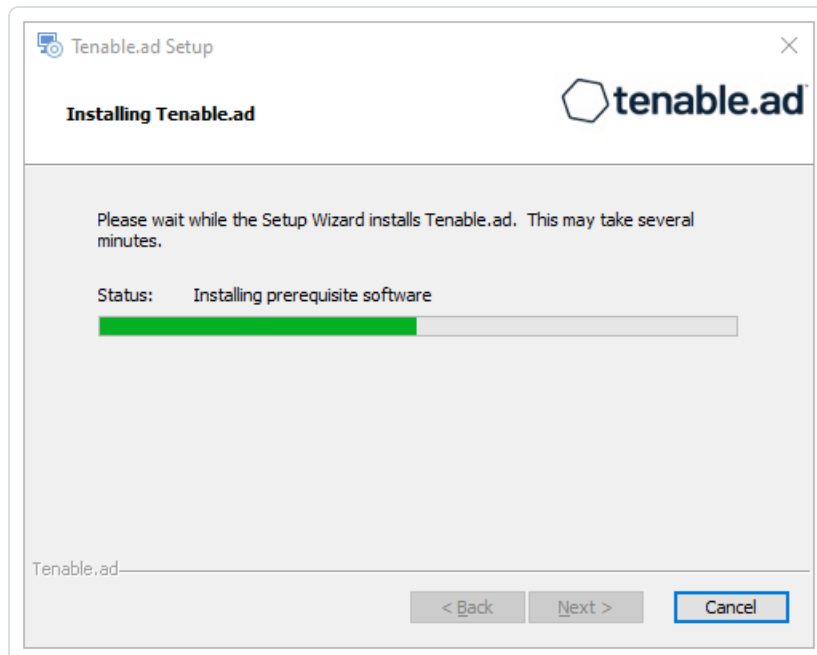

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

15. Click **Finish**.



A dialog box asks you to restart your machine.

16. Click **No**.

Caution: Do NOT reboot the server now.


17. Upgrade the Security Engine Node (SEN).

To upgrade the SEN with custom TLS and with peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

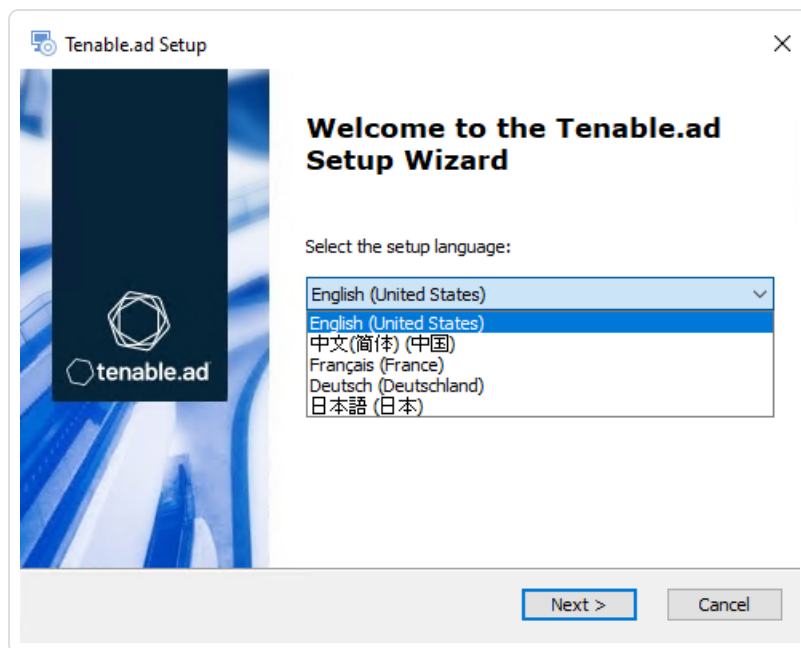


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

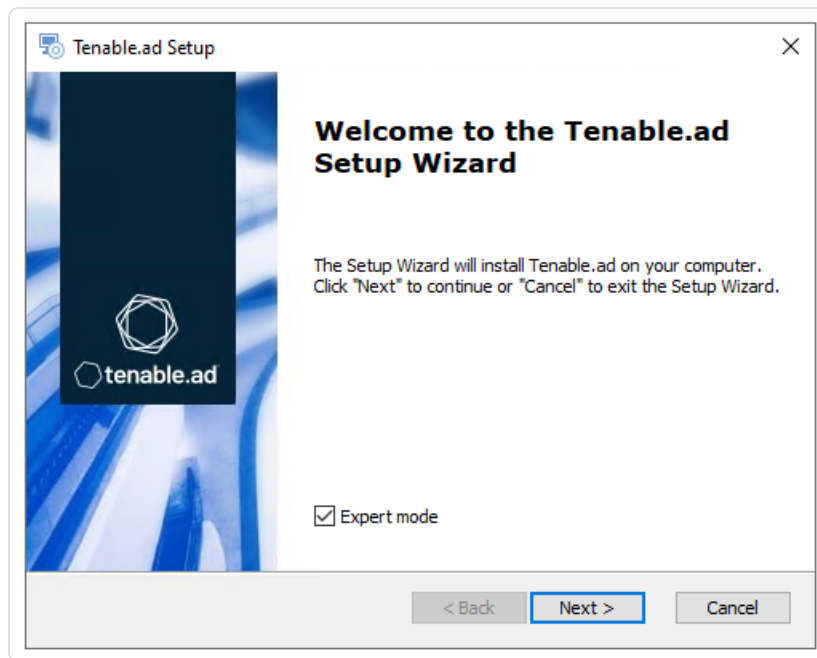

4. Click **Next**.


The **Custom Setup** window appears.

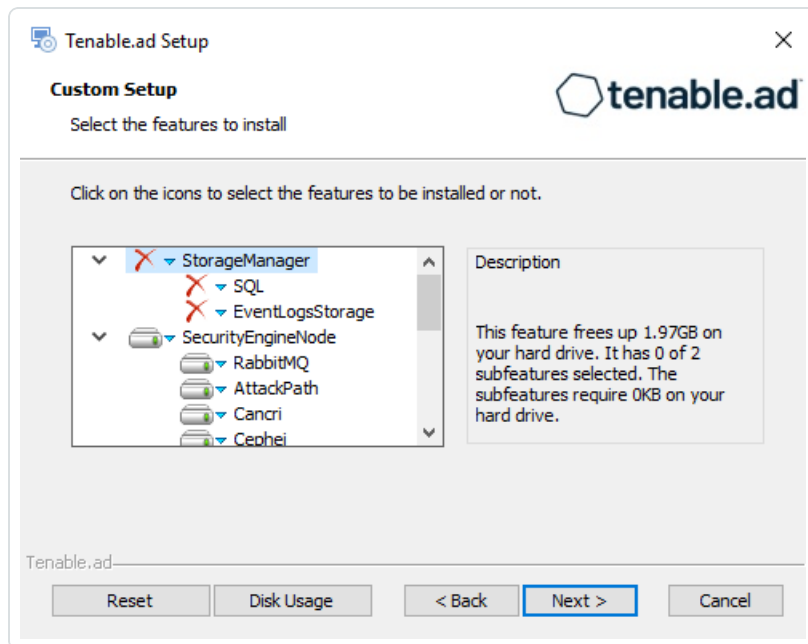

5. The installation program automatically preselects the **Security Engine Node** feature based on the previous installation. Click **Next**.

The **TLS Options** window appears.

6. Select the **TLS with custom certificates with peer verification** option.

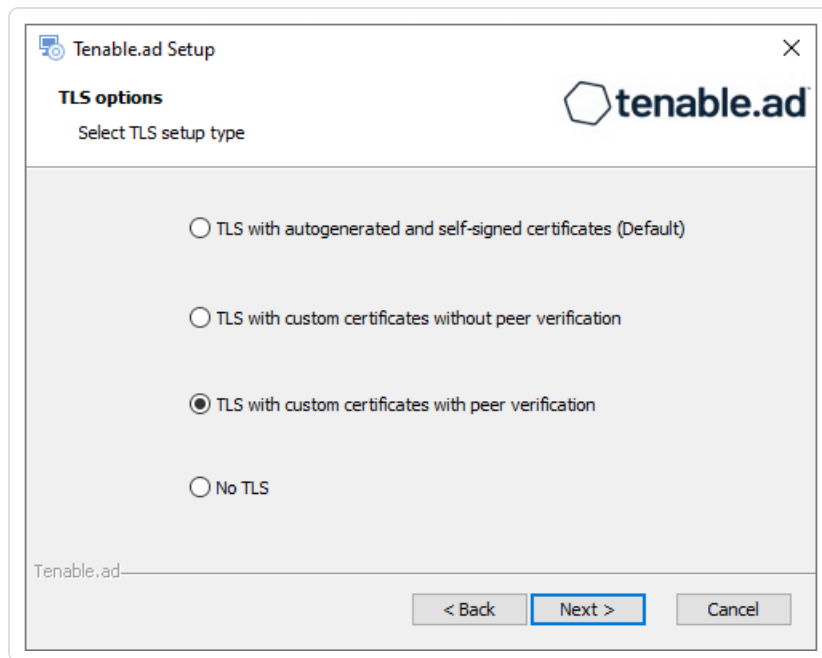


7. Click **Next**.

The **TLS certificates** window appears.

8. Provide the following information:

- In the **Server PFX Archive** box, click ... to browse to your PFX archive.
- In the **PFX Password** box, type the password for the PFX file.
- In the **CA Cert File** box, click ... to browse to your CA certificate file.

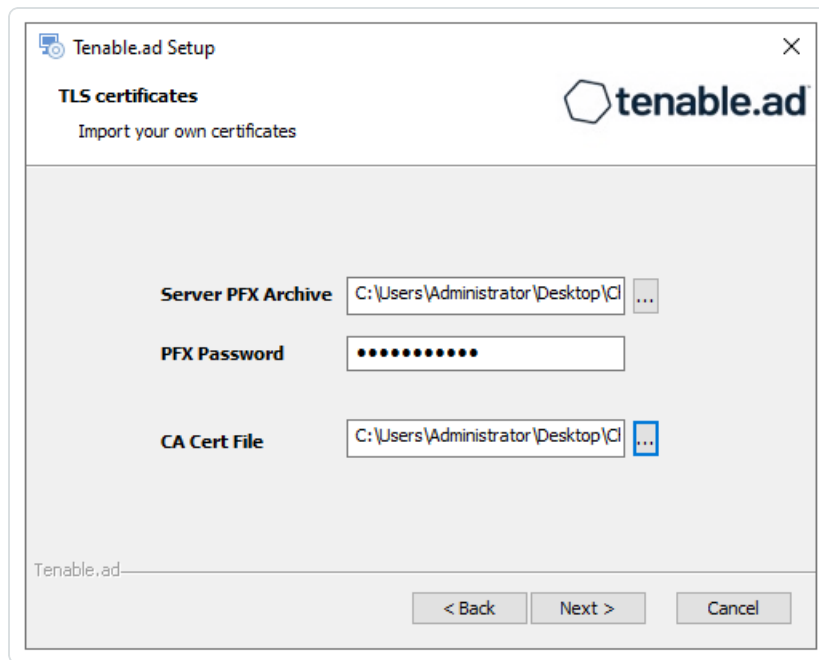

9. Click **Next**.

The **Storage Manager** window appears.

10. The installer shows the host name or IP address of your MSSQL database from your previous installation. Check that it remains valid and correct if necessary. Click **Next**.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager

Fill in relevant fields

MSSQL

IP: 10.0.49.34

Port: 1433

Password:

Instance Name: _____

SQL UserDB Disk: _____

SQL UserDB Log Disk: _____

SQL TempDB Disk: _____

Event Logs Storage

IP: 10.0.49.34

Port: 4244

Tenable.ad _____

< Back Next > Cancel

Caution: Remember to update the Event Logs Storage IP or host name address during this step. Failing to do so leads to attack detection issues. If you have successfully completed this screen and upgraded the SEN, you must update the environment variables for `ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host` and `ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host` from the **current value** to the accurate value for **<Storage Manager host name or IP address>**. For more information, see the [Troubleshooting knowledge base article](#).

11. Click **Next**.

The **Security Engine Node** window appears.

12. In the **DNS name or IP** box, the installer shows the DNS name (preferred) or IP address of the web server that end users type to access Tenable Identity Exposure from your previous installation. Check that this remains valid and correct if necessary.

The screenshot shows the 'Tenable.ad Setup' window with the 'Security Engine Node' configuration screen. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Security Engine Node' and 'Fill in relevant fields'. The configuration is organized into two main sections. The first section has two columns: 'IP' and 'Port'. It contains five rows of configuration items: 'RabbitMQ' (IP: 127.0.0.1, Port: 5671), 'Eridanis' (IP: 127.0.0.1, Port: 3000), 'Electra' (IP: 127.0.0.1, Port: 3002), 'Enif' (IP: 127.0.0.1, Port: 3003), and 'Attack Path' (IP: 127.0.0.1, Port: 4242). The second section is for 'Kapteyn', with a 'DNS name or IP' field containing '172.26.112.73'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

	IP	Port
RabbitMQ	127.0.0.1	5671
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

DNS name or IP
Kapteyn: 172.26.112.73

< Back Next > Cancel

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

13. Click **Next**.

The **Ready to Install** window appears.


The screenshot shows the 'Tenable.ad Setup' window with the 'Ready to Install' screen. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Ready to Install' and 'The Setup Wizard is ready to begin the Tenable.ad installation'. The main area contains the following text: 'Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.' At the bottom, there are three buttons: '< Back', 'Install', and 'Cancel'. The 'Install' button is highlighted with a blue border.

Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.

< Back Install Cancel



14. Click **Install** to begin the upgrade.

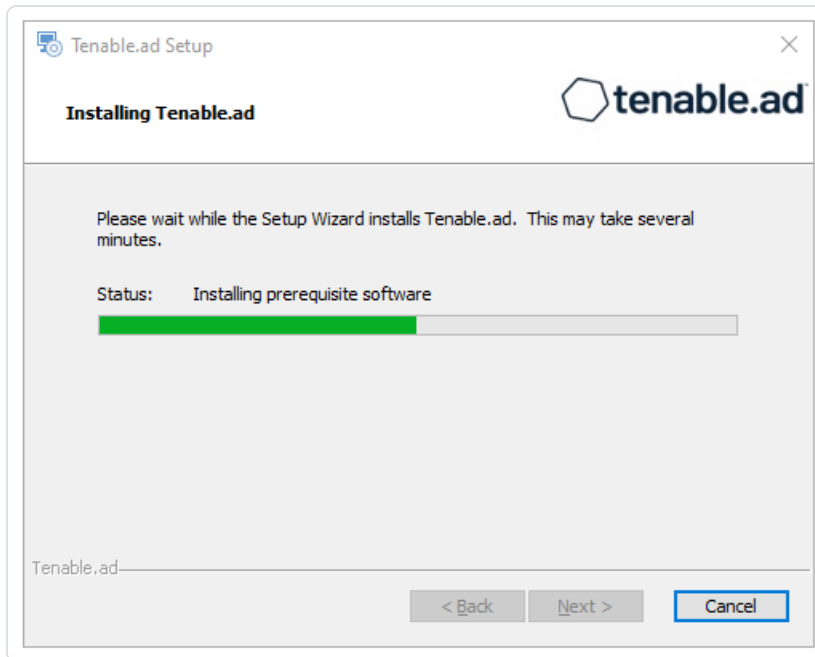

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

15. Click **Finish**.

A dialog box asks you to restart your machine.

16. Click **No**.

Caution: Do NOT reboot the server now.


17. Upgrade the Storage Manager.

To upgrade the Storage Manager with custom TLS and with peer verification:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

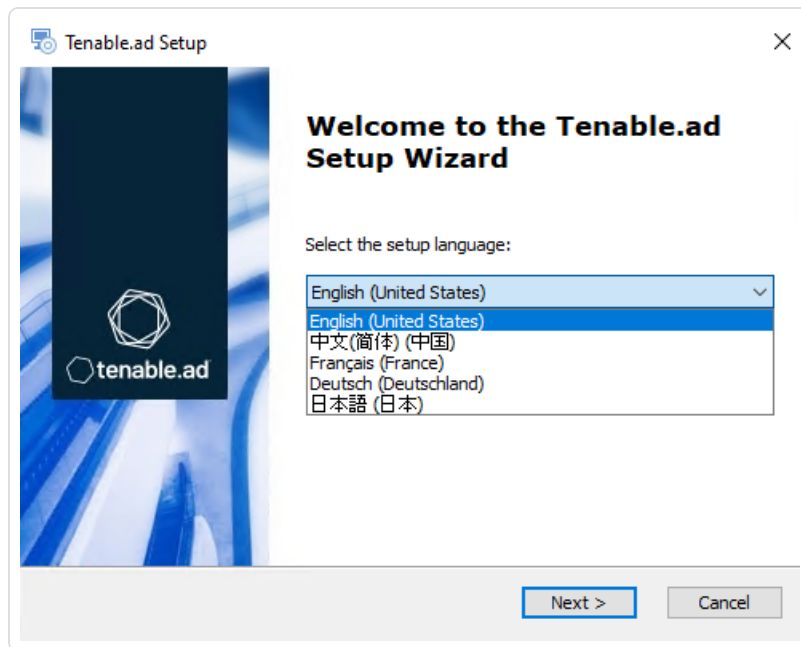


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

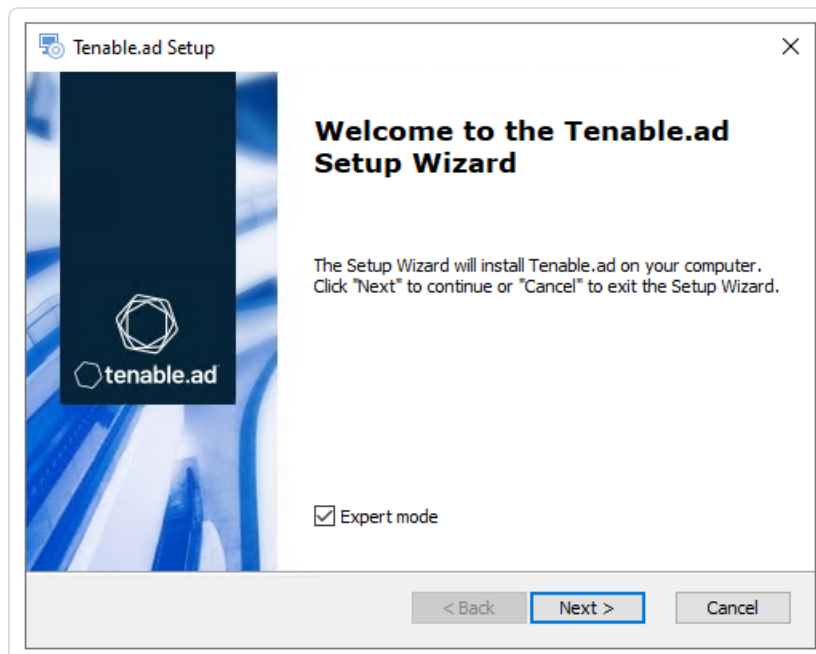


4. Click **Next**.

The **Custom Setup** window appears.

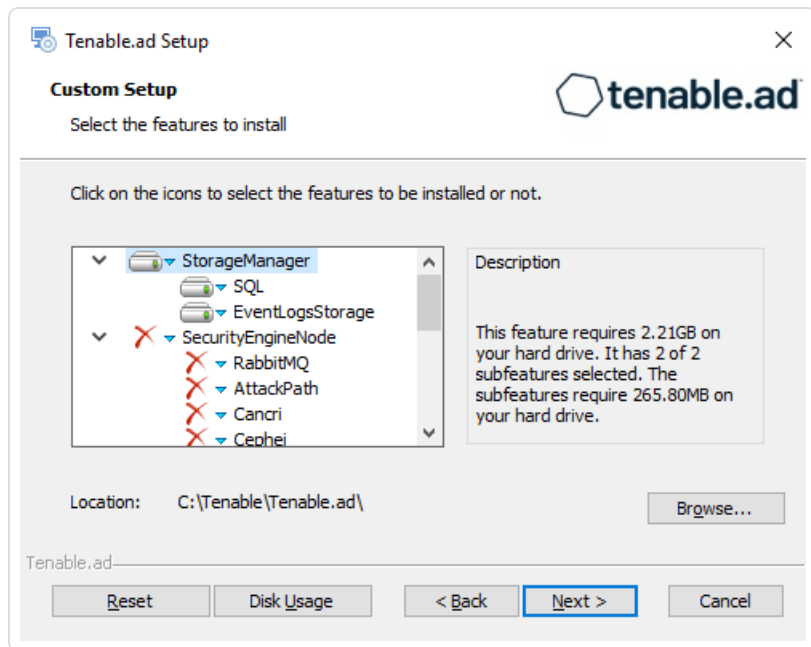

5. The installation program automatically preselects the **Storage Manager** component based on the previous installation. Click **Next**.
6. (Optional) Click **Browse** to change the installation folder location. Change only the drive letter.
The **TLS Options** window appears.
7. Select the **TLS with custom certificates with peer verification** option.

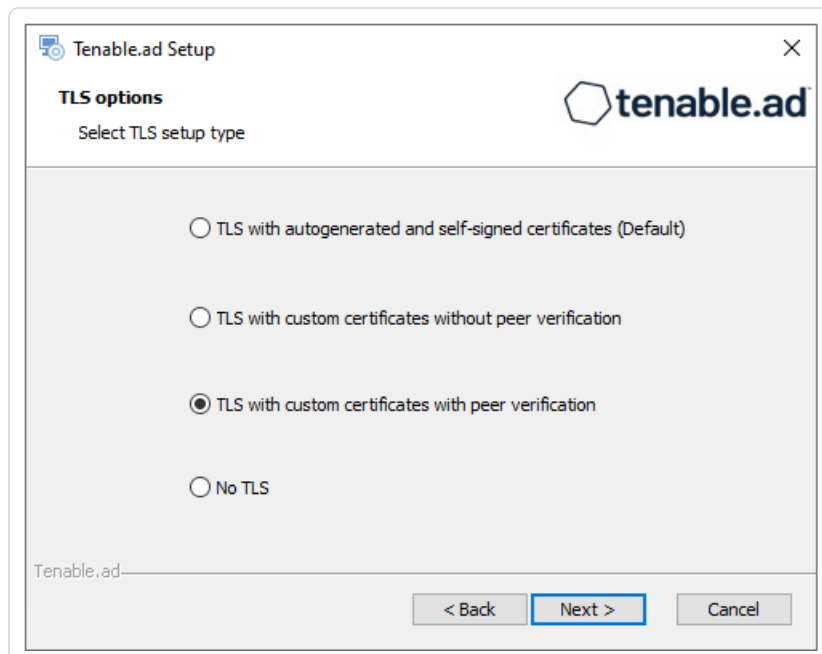


8. Click **Next**.



The **TLS certificates** window appears.

9. Provide the following information:
 - In the **Server PFX Archive** box, click ... to browse to your PFX archive.
 - In the **PFX Password** box, type the password for the PFX file.

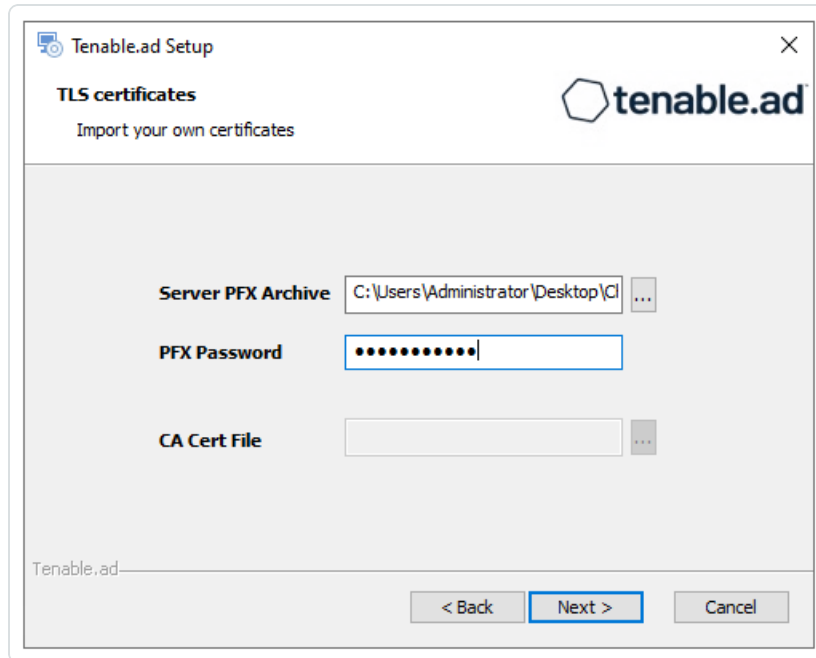

10. Click **Next**.

The **Storage Manager** window appears.

11. The installer reuses the information from your previous installation. Click **Next**

Note: If you change the SA password since the previous installation, the installer requires it to follow the

syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager
Fill in relevant fields

MSSQL

IP	10.0.49.34
Port	1433
Password
Instance Name	TENABLE
SQL UserDB Disk	C:\
SQL UserDB Log Disk	E:\
SQL TempDB Disk	F:\

Event Logs Storage

IP	10.0.49.34
Port	4244

Tenable.ad

< Back Next > Cancel

12. Click **Next**.

The **Ready to Install** window appears.

Tenable.ad Setup

Ready to Install
The Setup Wizard is ready to begin the Tenable.ad installation


Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.

Tenable.ad

< Back Install Cancel



13. Click **Install** to begin the upgrade.

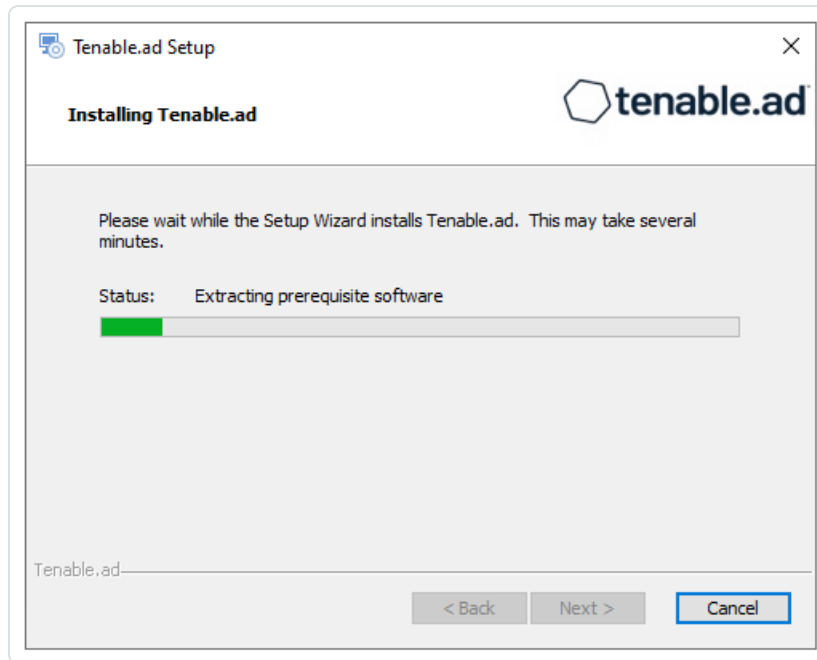

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

14. Click **Finish**.

A dialog box asks you to restart your machine.

15. Click **Yes**.

The machine restarts.

16. [Restart Services](#).

Upgrade with No TLS

Required User Role: Administrator on the local machine

This process upgrades the following Tenable Identity Exposure components without the TLS mode. It requires the "Expert mode" setting in the installation wizard.

Order of Upgrade

Upgrade the components in the following order:



1. [Directory Listener](#)
2. [Security Engine Node](#)
3. [Storage Manager](#)

Caution: For the installation or upgrade to work, you must run the installer as a local user or a domain user who is a member of the **Local Administrators** group.

Note: Restart your machine **before** each upgrade.

After you upgrade the components, restart the machines in the following order:


1. Storage Manager
2. Security Engine Node
3. Directory Listener

To upgrade the Directory Listener without TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

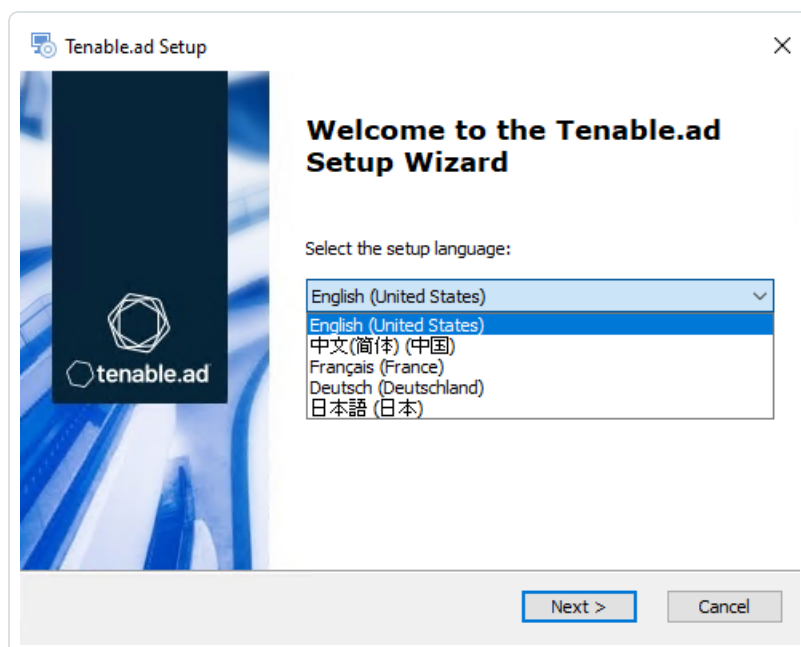


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

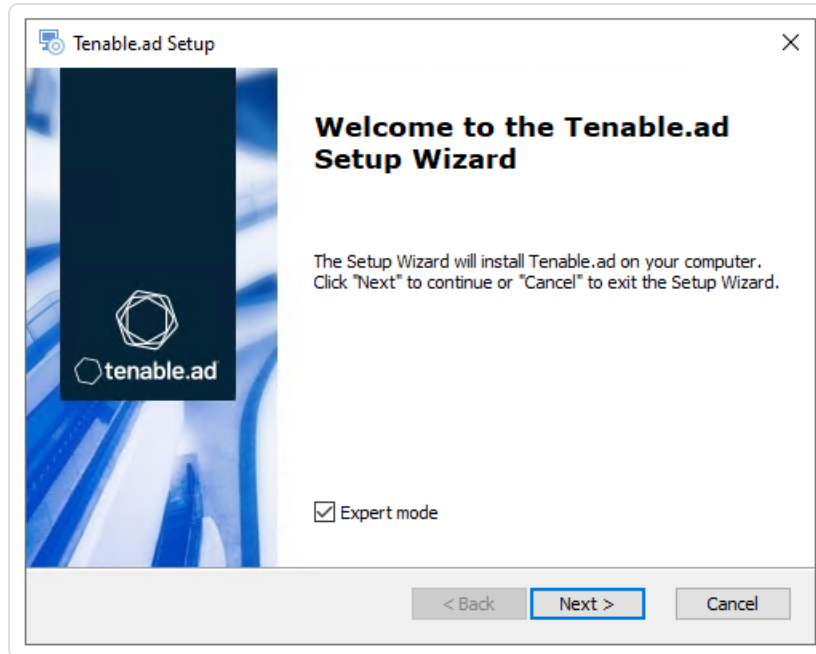

4. Click **Next**.

The **Custom Setup** window appears.

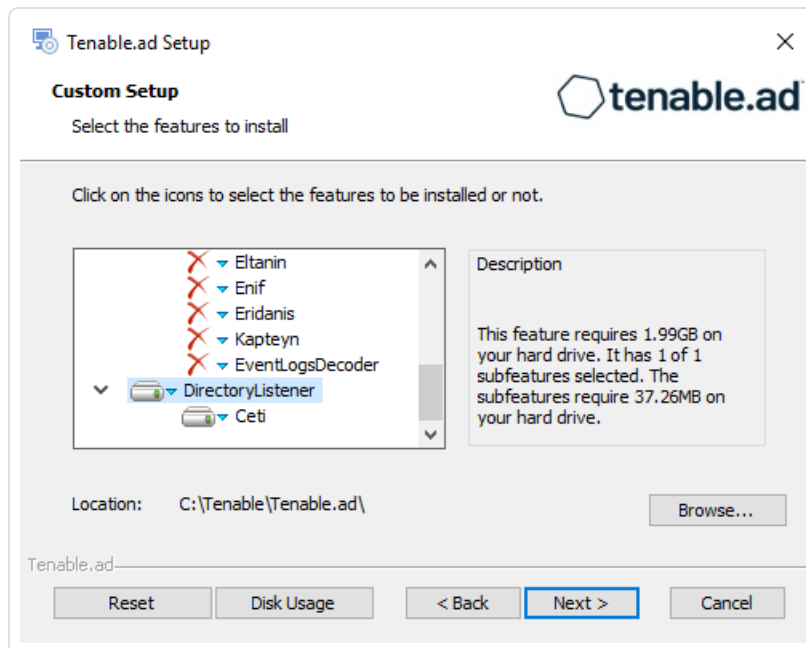




5. The installation program automatically preselects the Directory Listener component based on your previous installation. Click **Next**.

The **TLS Options** window appears.

6. Select the **No TLS** option.

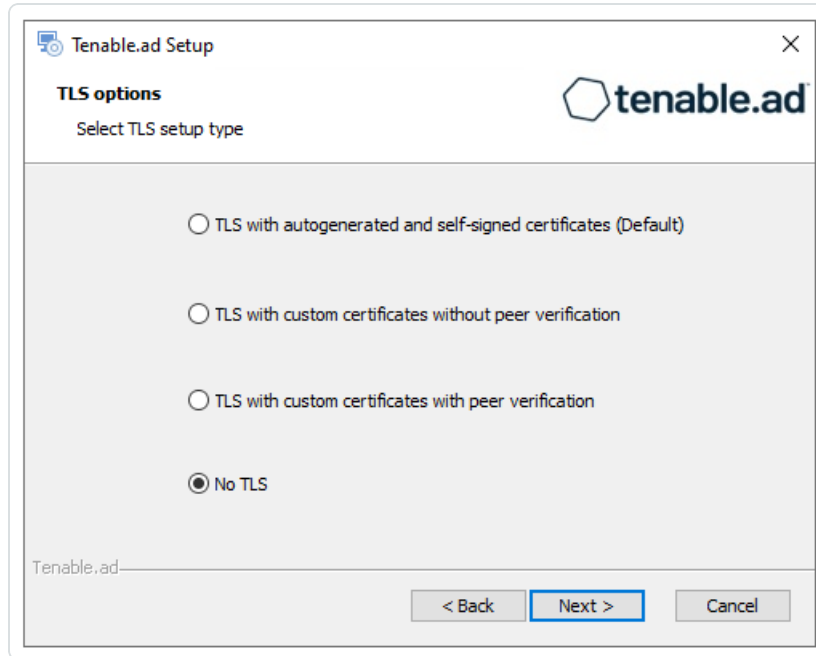

7. Click **Next**.

The **Security Engine Node** window appears.

8. In the **IP** box for RabbitMQ, the installer shows the address or host name of the SEN machine based on your previous installation. Check that this information remains valid and correct if

necessary.

The screenshot shows the 'Tenable.ad Setup' window with the 'Security Engine Node' configuration. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Security Engine Node' and 'Fill in relevant fields'. The configuration is organized into two columns: 'IP' and 'Port'. There are five rows of configuration items: RabbitMQ, Eridanis, Electra, Enif, and Attack Path. Each row has a text input field for the IP address and a text input field for the port number. Below these, there is a 'Kapteyn' section with a 'DNS name or IP' label and a text input field. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

	IP	Port
RabbitMQ	172.26.112.73	5672
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

DNS name or IP

Kapteyn

Tenable.ad

< Back Next > Cancel

9. Click **Next**.

The **Directory Listener** window appears.

10. In the **Subnets** box, type the subnet address for the Directory Listener. For multiple subnets, use a comma to separate the addresses.

The screenshot shows the 'Tenable.ad Setup' window with the 'Directory Listener' configuration. The window title is 'Tenable.ad Setup' and it features the Tenable logo. Below the title, it says 'Directory Listener' and 'Fill in relevant fields'. There is a text input field for 'Subnets separated by a comma (example: 192.168.1.1/32,192.168.1.3/32)'. The input field contains the text '0.0.0.0/0'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a blue border.

Subnets separated by a comma (example: 192.168.1.1/32,192.168.1.3/32)

0.0.0.0/0


Tenable.ad

< Back Next > Cancel


11. Click **Next**.



The **Ready to Install** window appears.

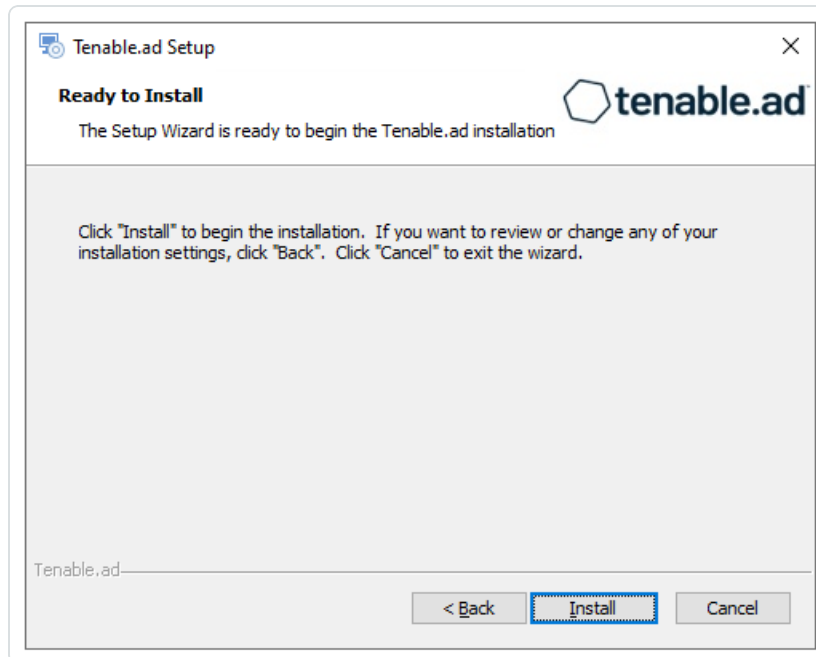

12. Click **Install** to begin the upgrade.

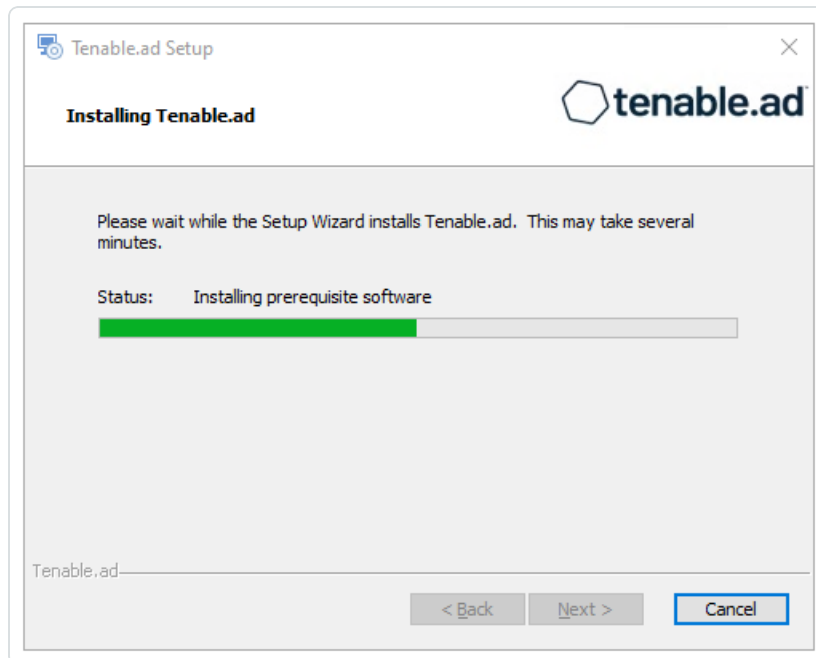

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

13. Click **Finish**.

A dialog box asks you to restart your machine.



14. Click **No**.

Caution: Do NOT reboot the server now.


15. Upgrade the Security Engine Node (SEN).

To upgrade the SEN without TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

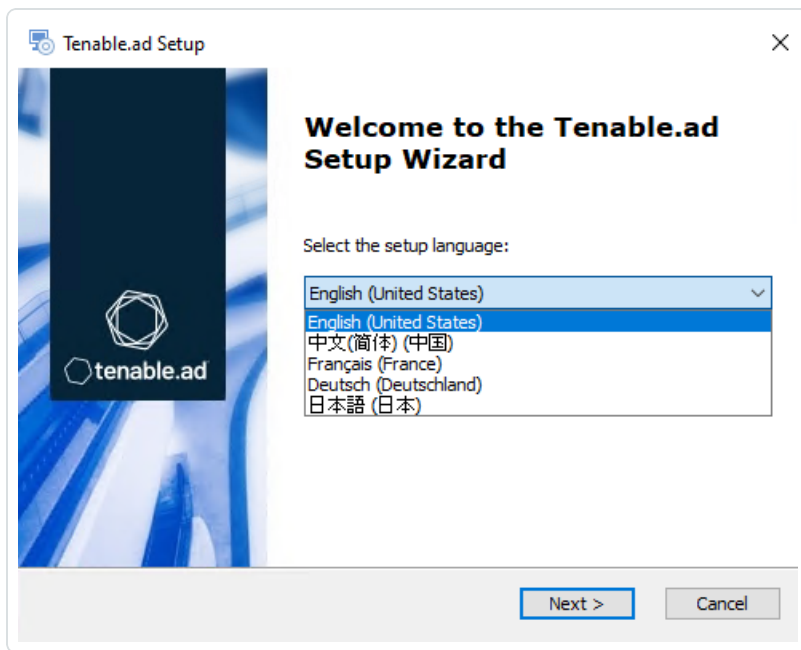


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

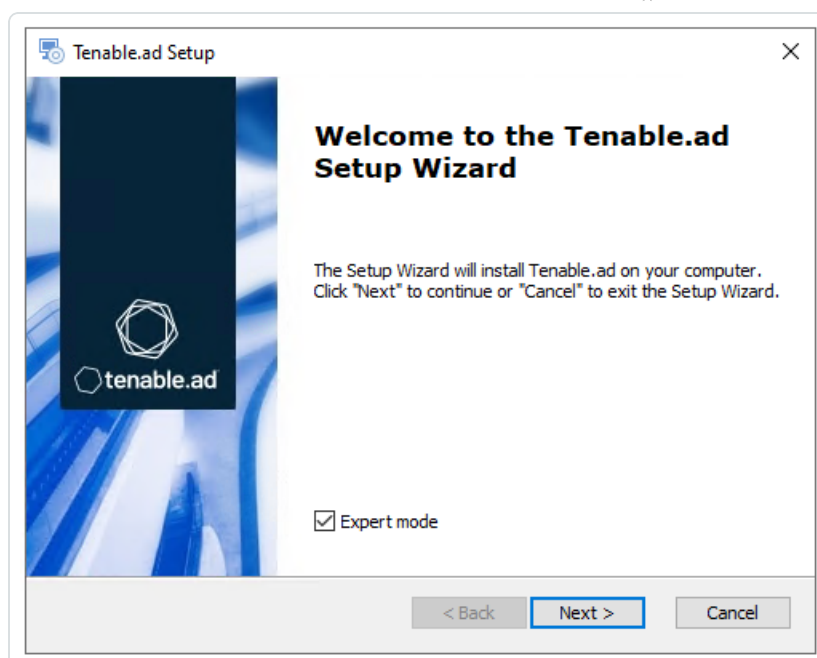

4. Click **Next**.


The **Custom Setup** window appears.

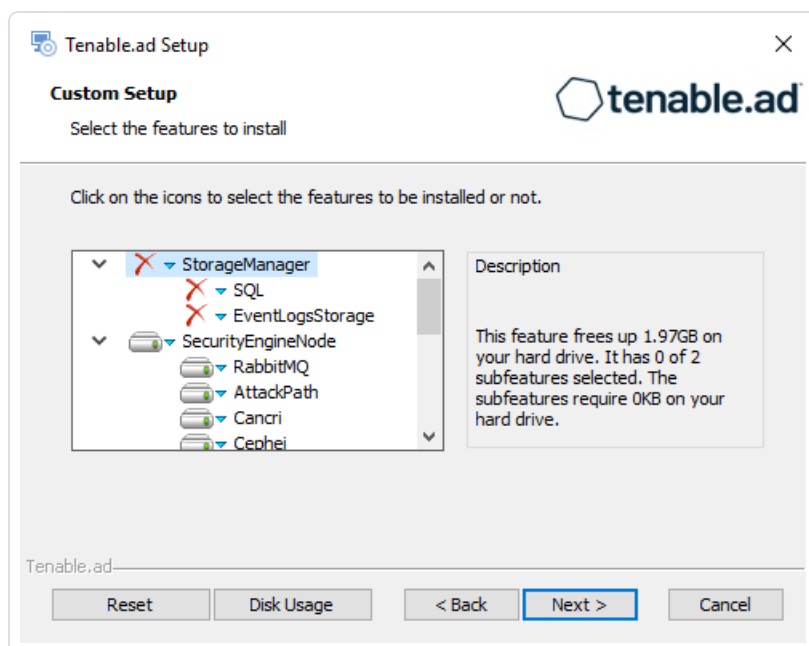

5. The installation program automatically preselects the SEN component based on your previous installation. Click **Next**.

The **TLS Options** window appears.

6. Select the **No TLS** option.

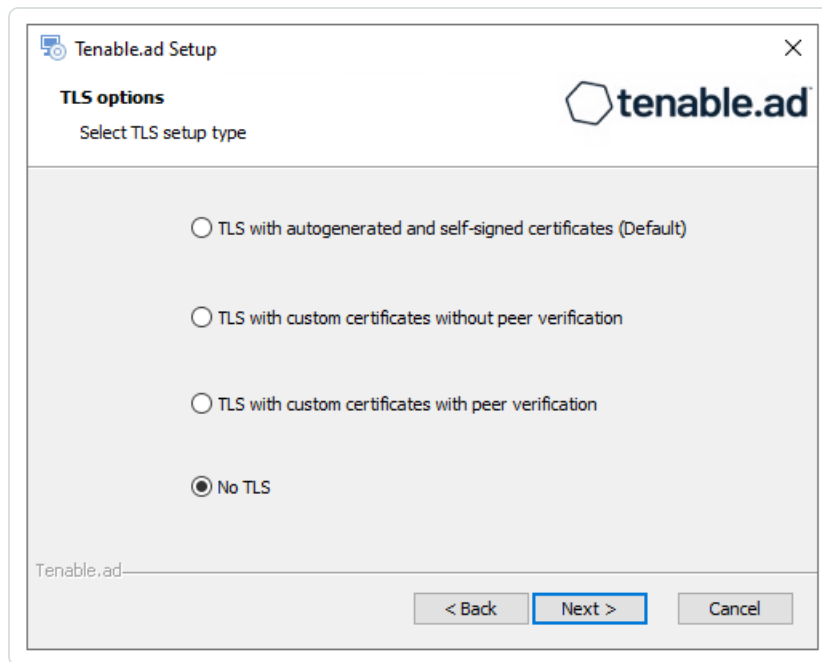

7. Click **Next**.

The **Storage Manager** window appears.

8. The installer shows the host name or IP address of your MSSQL database from your previous installation. Check that it remains valid and correct if necessary. Click **Next**.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.

Tenable.ad Setup

Storage Manager

Fill in relevant fields

MSSQL

IP: 10.0.49.34

Port: 1433

Password:

Instance Name: []

SQL UserDB Disk: []

SQL UserDB Log Disk: []

SQL TempDB Disk: []

Event Logs Storage

IP: 10.0.49.34

Port: 4244

Tenable.ad

< Back Next > Cancel

Caution: Remember to update the Event Logs Storage IP or host name address during this step. Failing to do so leads to attack detection issues. If you have successfully completed this screen and upgraded the SEN, you must update the environment variables for `ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host` and `ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host` from the **current value** to the accurate value for **<Storage Manager host name or IP address>**. For more information, see the [Troubleshooting knowledge base article](#).

9. Click **Next**.

The **Security Engine Node** window appears.

10. In the **DNS name or IP** box, the installer shows the host name or IP address of the web server that end users type to access Tenable Identity Exposure from your previous installation. Check that this remains valid and correct if necessary.

Tenable.ad Setup ✕

Security Engine Node

Fill in relevant fields

	IP	Port
RabbitMQ	127.0.0.1	5672
Eridanis	127.0.0.1	3000
Electra	127.0.0.1	3002
Enif	127.0.0.1	3003
Attack Path	127.0.0.1	4242

Kapteyn DNS name or IP

Tenable.ad _____

Note: By default, the installation process creates a self-signed certificate with the DNS name or the IP address that you entered. For more information, see [Change the IIS Certificate](#).

11. Click **Next**.

The **Ready to Install** window appears.

Tenable.ad Setup ✕

Ready to Install


The Setup Wizard is ready to begin the Tenable.ad installation

Click "Install" to begin the installation. If you want to review or change any of your installation settings, click "Back". Click "Cancel" to exit the wizard.

Tenable.ad _____



12. Click **Install** to begin the upgrade.

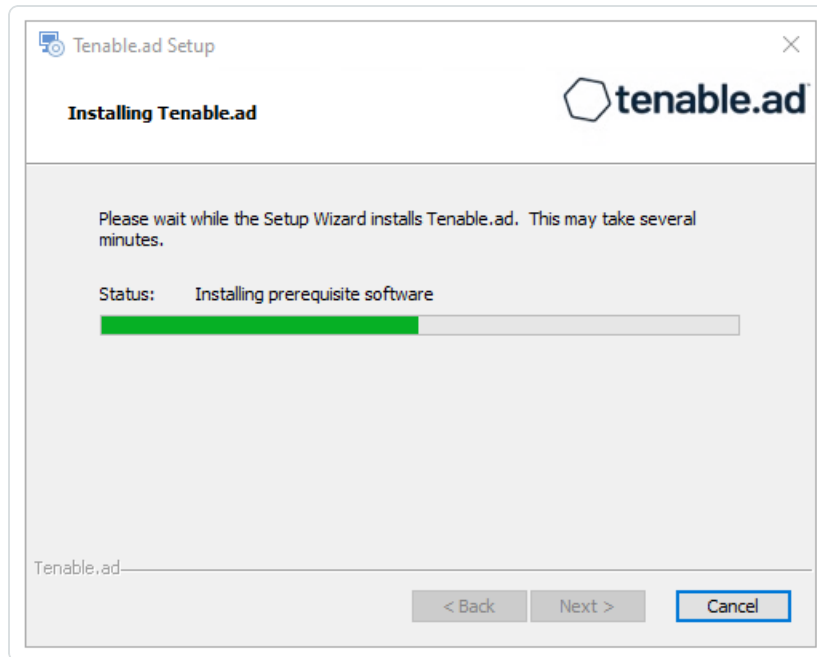

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

13. Click **Finish**.

A dialog box asks you to restart your machine.

14. Click **No**.

Caution: Do NOT reboot the server now.


15. Upgrade the Storage Manager.

To upgrade the Storage Manager without TLS:

1. On the local machine, run the installation file `Tenable.ad_v3.29.x.exe`.


A welcome screen appears.

2. In the setup language box, click the arrow to select the language for the installation, and click **Next**.

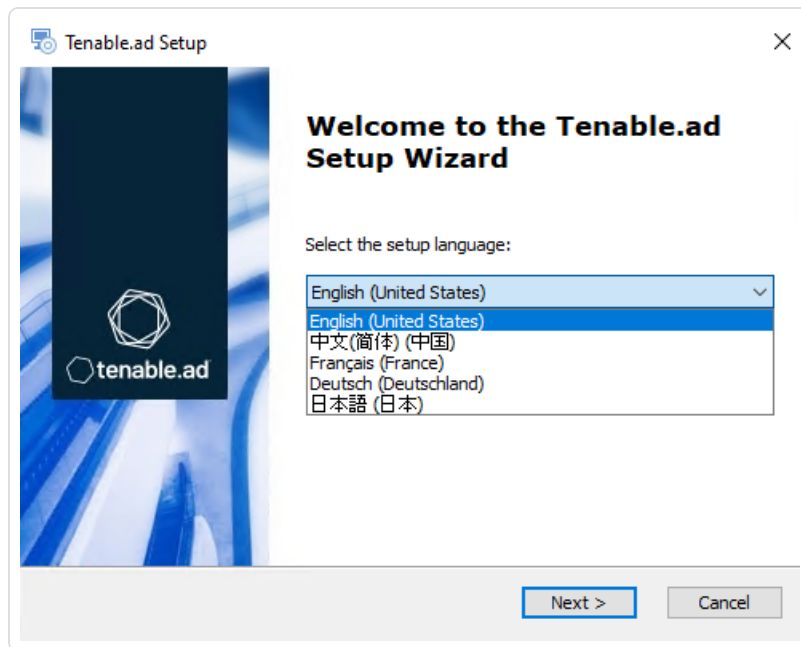


The **Setup Wizard** appears.

3. Select the **Expert Mode** checkbox.

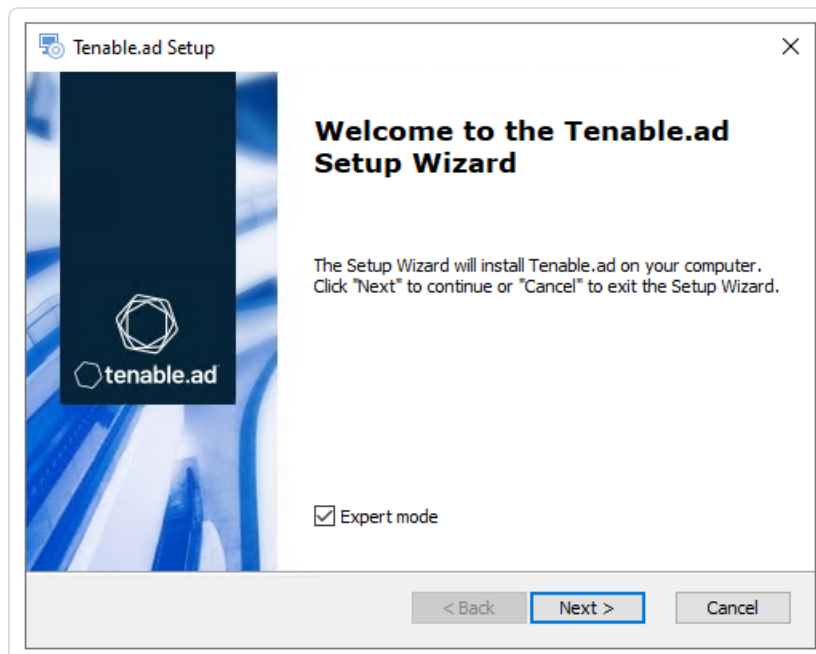


4. Click **Next**.

The **Custom Setup** window appears.

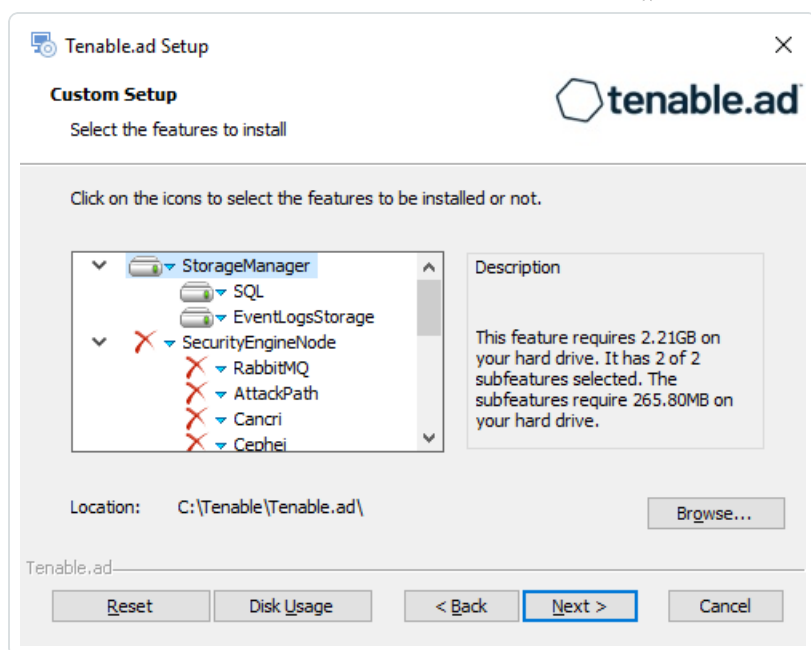

5. The installation program automatically preselects the Storage Manager component based on the previous installation. Click **Next**.
6. (Optional) Click **Browse** to change the installation folder location. Change only the drive letter.
The **TLS Options** window appears.
7. Select the **No TLS** option.

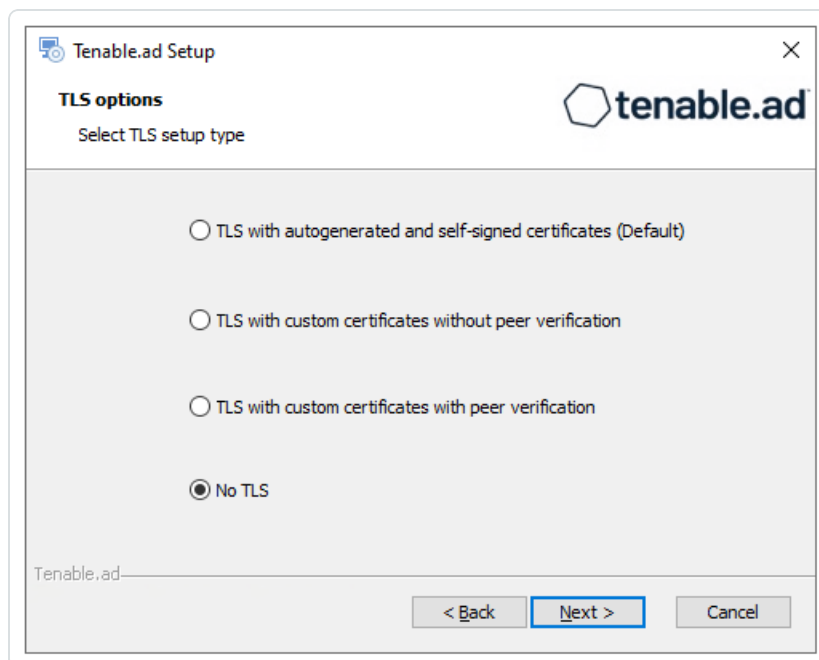



8. Click **Next**.


The **Storage Manager** window appears.

Note: If you change the SA password since the previous installation, the installer requires it to follow the syntax described in [Strong Passwords](#) for the SQL Server.


MSSQL		Event Logs Storage	
IP	10.0.49.34	IP	10.0.49.34
Port	1433	Port	4244
Password		
Instance Name	TENABLE		
SQL UserDB Disk	C:\		
SQL UserDB Log Disk	E:\		
SQL TempDB Disk	F:\		

9. The installer reuses the information from your previous installation. Click **Next**

The **Ready to Install** window appears.

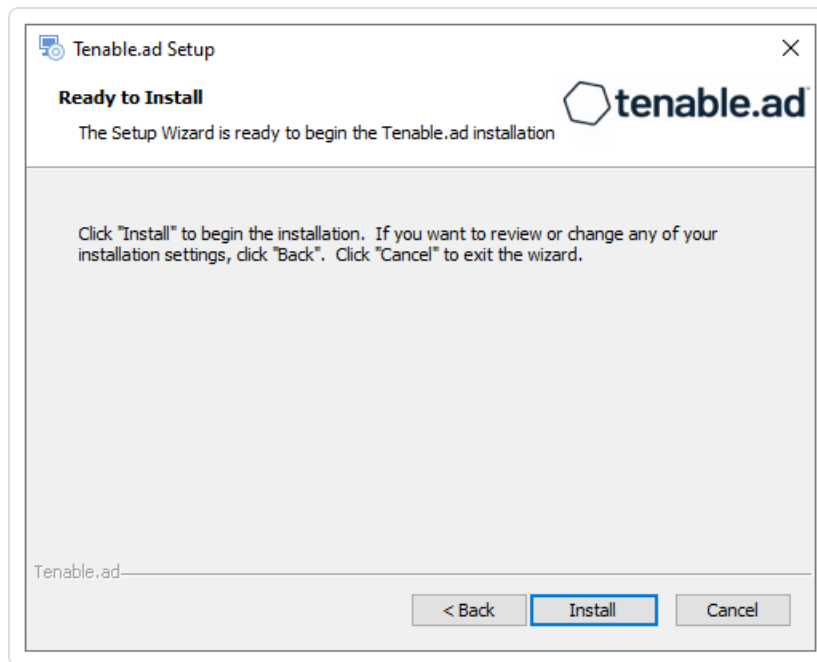

10. Click **Install** to begin the upgrade.

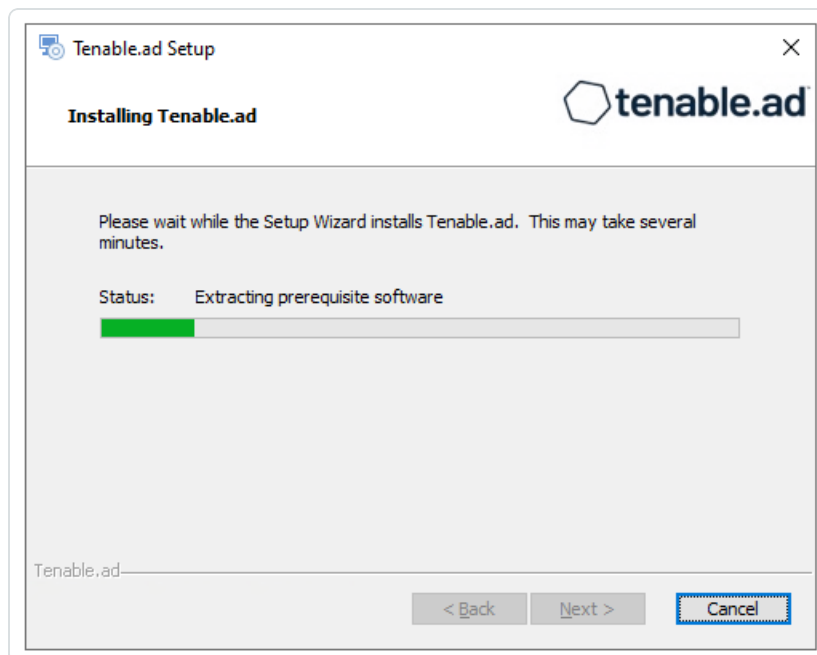

After the upgrade completes, the **Completing the Tenable.ad Setup Wizard** window appears.

11. Click **Finish**.

A dialog box asks you to restart your machine.

12. Click **Yes**.



The machine restarts.

13. [Restart Services.](#)

Restart Services

After you finish upgrading the Tenable Identity Exposure components Storage Manager, Security Engine Node, and Directory Listener, you can restart the services.

Storage Manager

The Storage Manager is the first component to restart after you finish the upgrade.

To restart the Storage Manager machine:

1. At the prompt from the installation program, click **Yes**.
2. Check that these Storage Manager services are running:
 - SQL Server (Tenable)
 - SQL Server Agent (Tenable)
 - alsid_EventlogStorage1

Security Engine Node

The databases must be running before you restart Security Engine Nodes (SEN) services.

To restart the SEN machine:

1. At the prompt from the installation program, click **Yes**.
2. If you have more than one SEN machine, restart the machines in this order:
 1. RabbitMQ
 2. Others (Eridanis, Kapteyn, etc.)
 3. Cancri, EventLogsDecoder
 4. Cygni
3. Check that the following SEN services are running:



- `alsid_AttackPath1`
- `alsid_Cancri1`
- `alsid_Cephei`
- `alsid_CetiBridge`
- `alsid_Cygni`
- `alsid_Electra`
- `alsid_eltanin1`
- `alsid_Enif`
- `alsid_Eridanis`
- `alsid_EventlogsDecoder1`
- `alsid_Kapteyn`
- `RabbitMQ`
- `World Wide Web Publishing Services`

Directory Listener

Databases and Security Engine Nodes must be running before you restart Directory Listener services.

To restart Directory Listener services:

1. At the prompt from the installation program, click **Yes**.
2. Check that the following Directory Listener service is running:
 - `alsid_Ceti`



Manage Tenable Identity Exposure

Using its web portal, Tenable Identity Exposure allows you to review, manage, and receive relevant information about the security state of the monitored infrastructure. The web portal displays the following:

- Live Active Directory security flows to allow security teams to perform security compliance tasks, threat hunting, or incident response tasks.
- Administrative panes to manage the monitoring of new infrastructures.
- Access rights of each user or service connected to the platform.

Tenable Identity Exposure can also forward its security monitoring flows to other services such as internal application logs for further correlation.

Alerts and Notifications

Tenable Identity Exposure includes notifications and alerts that you can connect to third-party services, such as an [event log collector](#) (for example, a Security Information and Event Management), an email service provider using SMTP, or a ticketing system. When a new security incident appears, Tenable Identity Exposure raises notifications to inform security teams to take immediate action.

Tenable Identity Exposure uses email notifications to send general purpose information to users, such as password recovery information, as well as notifications about security incidents.

To enable alerts, provide Tenable Identity Exposure with credentials for a user account with permissions to send emails to the selected SMTP server. This can be the same user account as the one you use to connect to your Active Directory.

The following is a generic email template for a security incident detected by Tenable:



New security risk on domain.local

You have received this email because you belong to Alsld for AD's alert notification list.

Technical details

- **Name:** AdminCount attribute set on standard users (C-ADMINCOUNT-ACCOUNT-PROPS)
- **Description:** Some decommissioned administrative accounts are not globally manageable
- **Score:** 80 (25%)
- **Severity:** low
- **Timestamp:** Sun Oct 09 2016 02:21:15 GMT+0200 (Romance Daylight Time)

Security considerations

A sudden variation in an Indicator-of-Exposure state can be caused by a security incident or an administrative error. This alert should be carefully reviewed to assess its cause.

[IoE details](#)

Tenable REST v3 API

You can integrate Tenable Identity Exposure into a security ecosystem using its RESTv3 (Representational State Transfer) API to enable management, logging, or notification capabilities.


Tenable Identity Exposure provides a public API that you can use to connect the platform to third-party services. This API supports the REST v3 standard which you access using HTTP.

For more information, see the [Tenable Identity Exposure API Reference Portal](#).

Connect to an Event Log Collector

You can configure Tenable Identity Exposure to send notifications, such as alerts or security offenses, to an event log collector. Tenable Identity Exposure also allows you to redirect a subset of the traffic flows to a collector for further correlation.

The following illustration shows an integrated process managing Security Information and Event Management (SIEM) events.

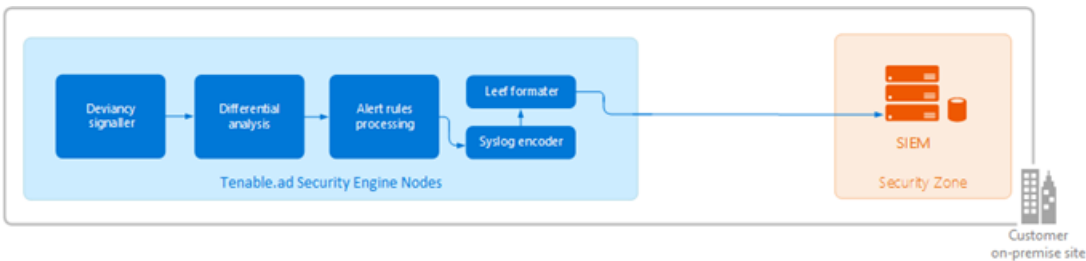

Tenable Identity Exposure uses the Syslog protocol to carry messages in LEEF format.



Tenable Identity Exposure supports most SIEMs or event log collectors. Tenable Identity Exposure supports the following event collectors:

- IBM QRadar
- Splunk
- RSA Netwitness
- LogRhythm
- Micro Focus ArcSight
- Tibco Loglogic
- McAfee Enterprise Security Manager

Scale Tenable Identity Exposure Services

Required User Role: Administrator on the local machine

To improve data processing performance, you can scale up or down these Tenable Identity Exposure services.

Cancri

Cancri's scaling up mechanism goes through its reconfiguration using an environment variable.

To scale Cancri:

1. Open a PowerShell (x64) terminal.
2. Define the environment variable `ALSID_CASSIOPEIA_CANCRI_Application__MaxConcurrentPublishToEridanis`:

Note: The default value is 100.

```
[Environment]::SetEnvironmentVariable("ALSID_CASSIOPEIA_CANCRI_Application__MaxConcurrentPublishToEridanis", "IntegerValue", "Machine")
```

3. Restart Cancri:



```
Restart-Service -Name Alsid_Cancri
```

Example:

```
[[Environment]::SetEnvironmentVariable("ALSID_CASSIOPEIA_CANCRI_Application__  
MaxConcurrentPublishToEridanis", "200", "Machine")  
Restart-Service -Name Alsid_Cancri
```

EventLogsDecoder

The EventLogsDecoder component needs to process data at a high speed. It's possible that a single instance of EventLogsDecoder may not suffice, so consider running multiple instances of this component concurrently.

To determine when to initiate additional instances, you monitor a specific metric, which is the number of messages queued in the RabbitMQ queue named `event-logs-decoder-iaa-input-queue`. When this metric reaches a threshold of 8000 messages, it's imperative to launch a new instance of the EventLogsDecoder component.

To scale a new instance of EventLogsDecoder on a new machine, launch the installation program on this machine and follow the same procedure as the one you used for the first instance:

- Default TLS
- Default TLS in "Expert Mode"
- TLS without Peer Verification
- TLS with Peer Verification
- No TLS

You do not need to restart any service because Tenable Identity Exposure automatically takes in account this new instance.

Note: It is not possible to add several instances of EventLogsDecoder on the same machine.

Eridanis



To scale up the total number of Eridanis instances, you must update the ERIDANIS_WORKER_COUNT environment variable.

To scale Eridanis:

1. Open a PowerShell (x64) terminal.
2. Run the following command (replace the value in brackets with the real expected value):

```
[System.Environment]::SetEnvironmentVariable('ERIDANIS_WORKER_COUNT', <number of Eridanis instances>, 'Machine')
```

3. Restart Eridanis:

```
Restart-Service -Name 'alsid_Eridanis'
```

Example: For 3 Instances of Eridanis

```
[System.Environment]::SetEnvironmentVariable('ERIDANIS_WORKER_COUNT', 3, 'Machine')  
Restart-Service -Name 'alsid_Eridanis' -Force
```

Change IP Addresses or FQDNs for Tenable Identity Exposure Nodes

Changing the IP addresses or fully qualified domain names (FQDNs) of machines running the Storage Manager (SM), Security Engine Nodes (SEN), and Directory Listener (DL) is a required task in certain situations, such as disaster recovery testing. Using scripts to modify environment variables with the new IPs or FQDNs and to restart services is the most efficient way to perform this operation which also minimizes downtime.

To change the IP addresses or FQDN for Tenable Identity Exposure nodes:

1. If your Tenable Identity Exposure installation type uses:
 - **Default TLS:** Generate and replace all self-signed TLS certificates with the new IP addresses or FQDNs.



- **Custom TLS:** Generate and replace all custom TLS certificates with the new IP addresses or FQDNs.
 - **No TLS:** Proceed to the next step.
2. In PowerShell, list all the IP/FQDN-related environment variables with the new IPs or FQDNs, such as in the following example:

Note: The following scripts only show the environment variables that you would need to update in a conventional setup of Tenable Identity Exposure. It excludes any setup using split SENs or multiple DLs.

- Security Engine Node (SEN):

Update environment variables with new IPs or FQDNs for SEN

```
$vars = @{
    ERIDANIS_MSSQL_HOST           = $MssqlNodeIp           # Storage Manager
    Node IP Address
    ERIDANIS_MSSQL_PORT          = $MssqlNodePort          # Storage Manager
    Node Default Port 1433
    ERIDANIS_KAPTEYN_PUBLIC_DOMAIN = $WebAppHostName      # FQDN or IP Address
    of Web UI
    ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Host =
$DecoderIP # Storage Manager Node IP Address
    ALSID_CASSIOPEIA_EVENT_LOGS_DECODER_Service__EventLogsStorage__Port =
$DecoderPort # Default Port 4244
    ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Host =
$DecoderIP # Storage Manager Node IP Address
    ALSID_CASSIOPEIA_CYGNI_Service__EventLogsStorage__Port =
$DecoderPort # Default Port 4244
}

ForEach ($var in $vars.GetEnumerator()) {
    [System.Environment]::SetEnvironmentVariable($var.Name, $var.Value, 'Machine')
}
```

- Directory Listener (DL):

Update environment variables with new IPs or FQDNs for DL

```
$vars = @{
    ALSID_CASSIOPEIA_CETI_Service__Broker__Host =
$SecurityEngineNodeIP # Security EngineNode IP Address
    ALSID_CASSIOPEIA_CETI_Service__Broker__Port =
$SecurityEngineNodePort # Security EngineNode Port
}

ForEach ($var in $vars.GetEnumerator()) {
    [System.Environment]::SetEnvironmentVariable($var.Name, $var.Value, 'Machine')
}
```



3. Restart all services on each machine.

Restart services on each machine

```
# Restart all services
Get-Service alsid* | Restart-Service
Get-Service tenable* | Restart-Service
```

HTTPS for Tenable Identity Exposure Web Application

When the Tenable Identity Exposure installation process installs the Security Engine Node (SEN), it creates a self-signed certificate and binds it to the Tenable Identity Exposure web application to let you access Tenable Identity Exposure via HTTPS.

For example, if the SEN server's IP address is **10.0.48.55**, you can log in to the Tenable Identity Exposure web application at `https://10.0.48.55` after installation.

Tenable Identity Exposure provides a default [self-signed certificate](#) for your convenience. But to secure fully the web application, you must change this IIS certificate for a valid one, such as a signed certificate from the organization's PKI/internal Certificate Authority.

Moreover, the SSL/TLS protocols versions and their enabled cipher suites have globally configured settings in the underlying Windows operating system (OS). Tenable Identity Exposure does not modify these settings, so you must configure them to obtain the desired level of security in line with your organization's requirements.

In the absence of specific requirements and within a modern environment, Tenable recommends that you enable TLS 1.2. You can enable TLS 1.3 if you use Windows Server 2022 with the compatible Tenable Identity Exposure version. You should also disable weak cipher suites (DES, 3DES, RC2, RC4, AES 128, etc.)

Refer to the Microsoft documentation to [Restrict the use of certain cryptographic algorithms and protocols in Schannel.dll](#). Use the configuration method that your organization recommends to deploy those settings (for example local configuration, GPO, third-party tool, etc.) However, Tenable does not offer support around this.

For more information, see:




- [View the IIS Certificate](#)
- [Change the IIS Certificate](#)

View the IIS Certificate

The Tenable Identity Exposure installation process creates and places a self-signed certificate in Internet Information Services (IIS) Manager.

To view the IIS certificate:

1. Go to **Windows Start > Windows Administrative Tools > Internet Information Services (IIS) Manager**.
2. In the **Connections** panel on the left, click on the server name.
3. Double-click on **Server Certificates** to display certificates in the IIS Manager.

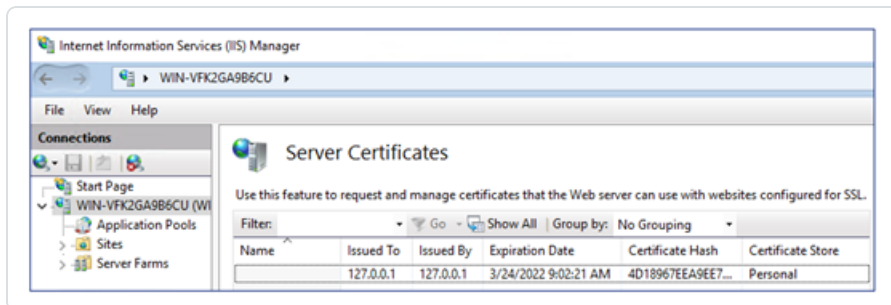


Note: By default, the installation process creates the self-signed certificate and the IIS site binding by using HTTPS port 443.

4. To explore the binding, expand **Sites** on the left panel.
5. Right-click your website and choose **Edit Bindings**.

The **Site Bindings** window appears.

6. Select the **https** binding.
7. Click **Edit**.

The **Edit Site Binding** window appears.

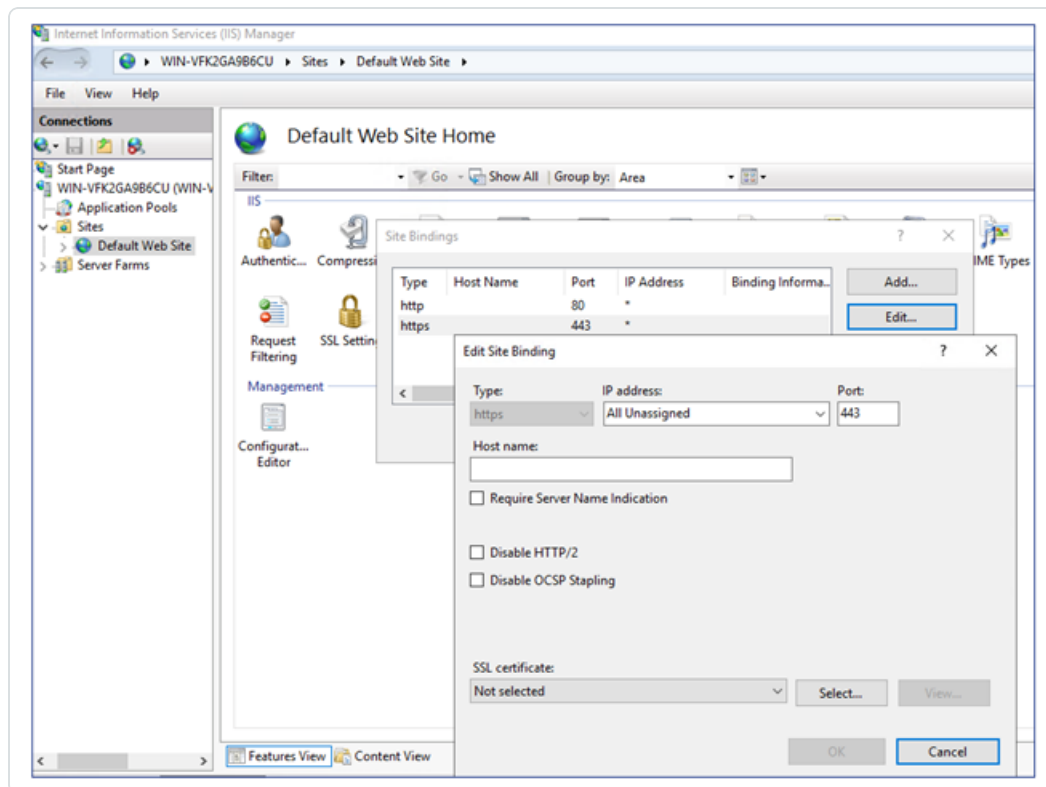

8. Under SSL Certificates, click on the drop-down menu to view installed certificates.

Change the IIS Certificate


To use your certificate for the Tenable Identity Exposure web application, you must:

1. [Install your certificate in IIS.](#)
2. [Edit site binding to use your installed certificate.](#)

To install the IIS certificate:


1. Go to **Windows Start > Windows Administrative Tools > Internet Information Services (IIS) Manager**.
2. In the **Connections** panel on the left, click on the server name.
3. Double-click on **Server Certificates** to display certificates in the IIS Manager.

4. In the right panel, click **Import** to import your certificate.

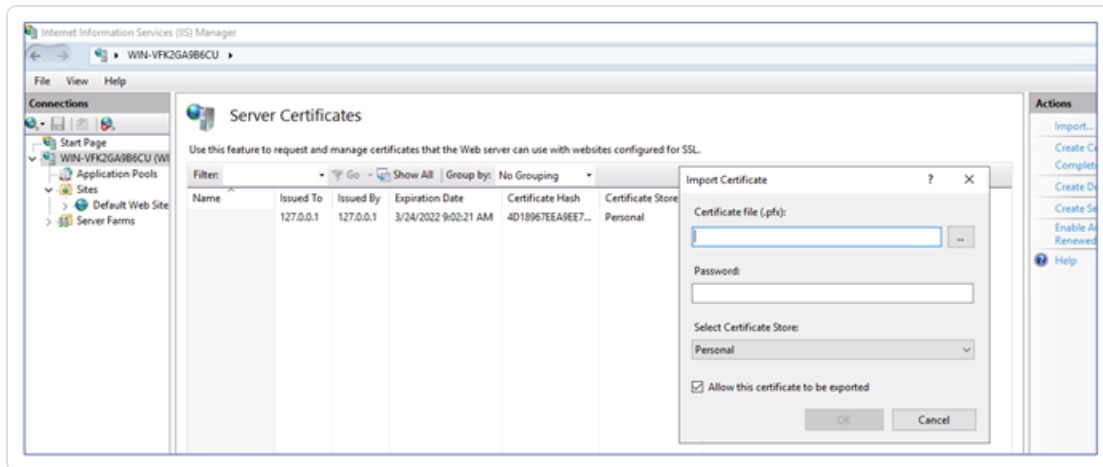


To change the IIS certificate:

1. [View the IIS Certificate.](#)
2. From the drop-down list of SSL certificates, select the certificate you just installed.
3. Click **OK**.

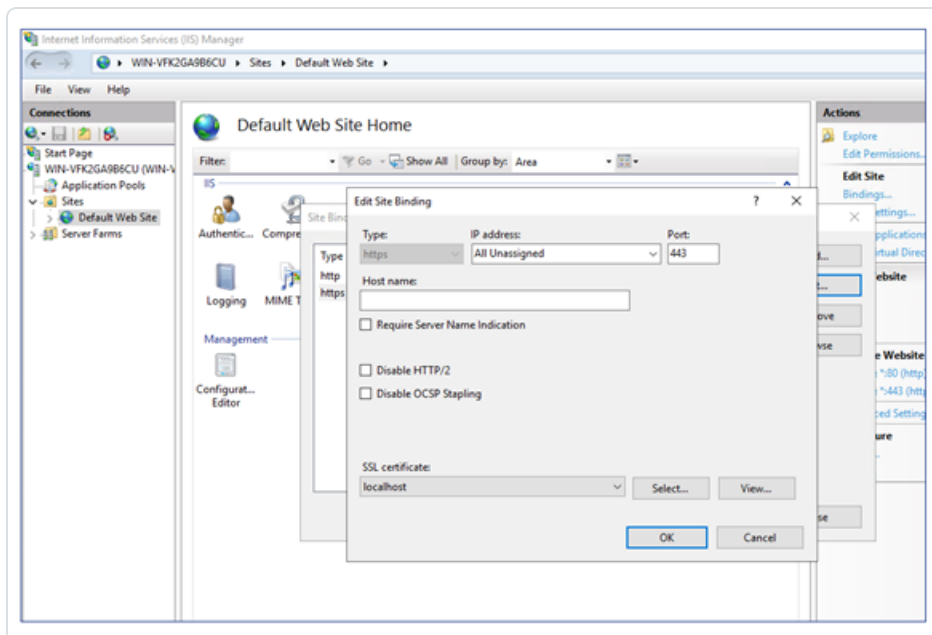

4. Right-click on the website in the **Connections** panel and select **Manage Website > Restart** for

the new certificate to take effect.

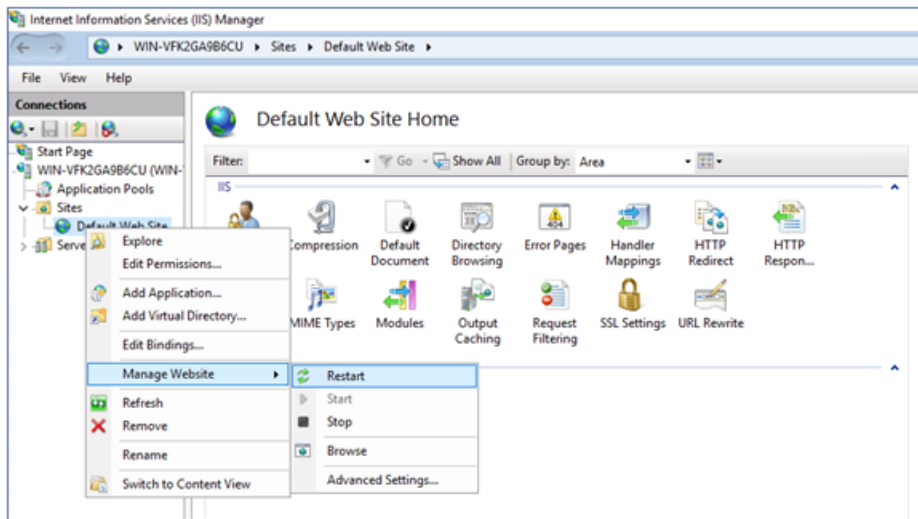



Upgrade and Maintenance

As part of its upgrade program, Tenable frequently publishes updates to provide new detection capabilities and new features.

- These upgrades include security patches for the underlying operating system. See the latest [Tenable Identity Exposure Release Notes](#) for more information.
- You can access them on [Tenable Downloads site](#).

To update Tenable Identity Exposure, deploy the update installation packages on each Windows Server machine. For more information about the update process, see [Update](#).

Maintenance and Support Services

To keep servers in good security conditions the Tenable Identity Exposure platform requires access to the following support services. For more information about the required network flows, see [Network Flow Matrix](#).

During maintenance operations, Tenable Support requires administrative access to the operating systems that host Tenable Identity Exposure.

Service Name	Description
Update management infrastructure	Your company's update management infrastructure (e.g., WSUS or SCCM) or Microsoft update servers on the Internet. This service applies security patches on the underlying operating system.
Time Server	Your company's time server (e.g., NTP server). This service synchronizes Tenable Identity Exposure's platform internal clock to your reference time. Time synchronization offers consistent security monitoring.
Identity provider	Your identity and access provider. This service activates SAML, LDAP, or OAUTH authentication to Tenable Identity Exposure's web services (portal, API, etc.).



Uninstall Tenable Identity Exposure

Required User Role: Administrator on the local machine

The uninstallation process removes all Tenable Identity Exposure components.

To uninstall Tenable Identity Exposure:

1. In Windows, go to **Control Panel > Programs > Programs and Features**.
2. Select Tenable Identity Exposure.
3. Click **Uninstall**. A dialog box asks for confirmation:
4. Click **Yes**.
 - The confirmation dialog box disappears after the uninstallation completes.
 - An icon in the system tray indicates that a second uninstallation phase is in process. This icon disappears when the uninstallation has fully completed.